



P2.0UTS


PLATAFORM PALLET TRUCK

TECHNICAL SPECIFICATIONS

HYSTER

A3B1 V1.0 14 July 2026

DIAGRAM

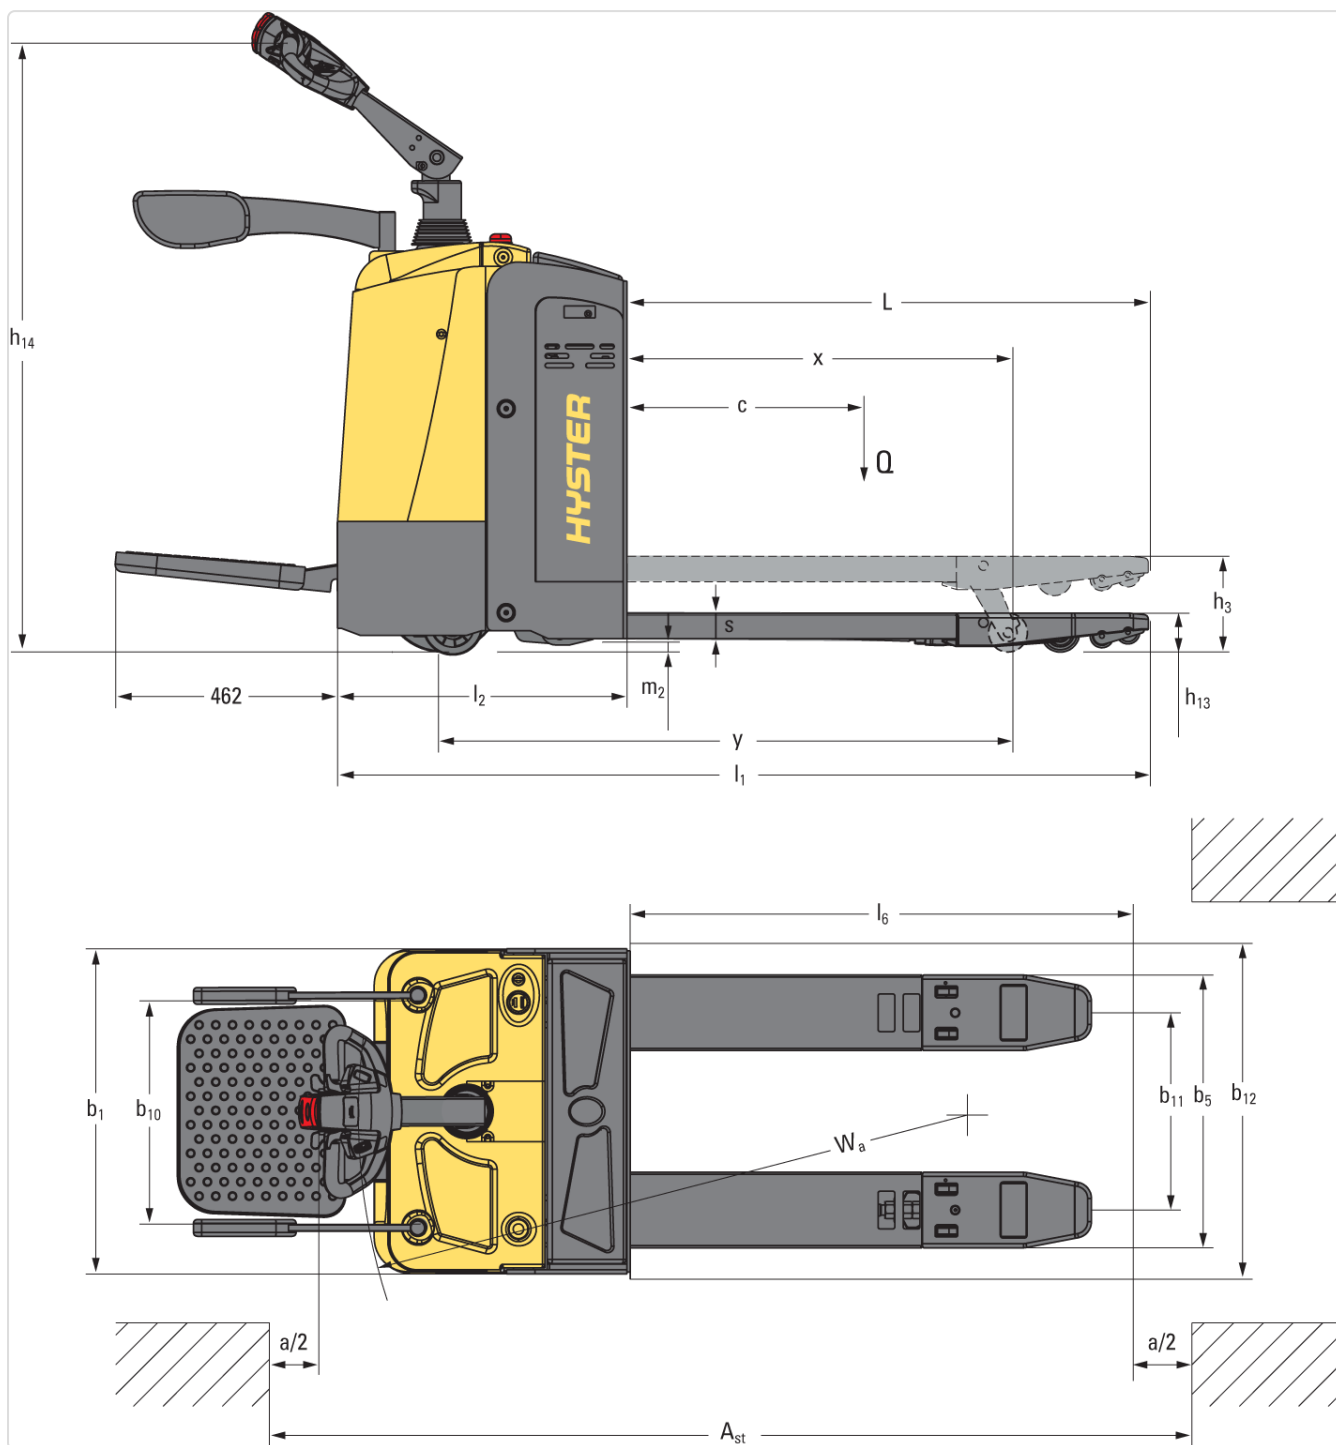

TECHNICAL DATA

SPECIFICATIONS TABLE

	1.2	MODEL DESIGNATION			P2.0UT S	P2.0UT S
GENERAL	1.1	Manufacturer			Hyster	Hyster
	1.3	Drive			Electric (battery)	Electric (battery)
	1.4	Operator type			Pedestrian	Pedestrian
	1.5	Rated capacity/rated load	Q1	t	2.0	2.0
	1.6	Load centre distance	c	mm	600	600
	1.8	Load distance, centre of drive axle to fork	x	mm	815 / 865 / 935	815 / 865 / 935
	1.9	Wheelbase	y	mm	1211 / 1261 / 1331	1211 / 1261 / 1331
WEIGHT	2.1	Service weight		kg	710	710
	2.2.1	Axle loading with load, front / rear		kg	1300	1410
	2.3.1	Axle loading without load, front / rear		kg	110	600
WHEELS	3.1	Tyre type			Polyurethane	Polyurethane
	3.2	Tyre size, front			250 × 70	250 × 70
	3.3	Tyre size, rear			82 × 98	82 × 98
	3.4	Additional wheels (dimensions)			127 × 57	127 × 57
	3.5	Wheels, number front / rear (x = driven wheels)			1X+2 / 2(4)	1X+2 / 2(4)
	3.6	Tread, front	b10	mm	490	490
	3.7	Tread, rear	b11	mm	340 / 505	340 / 505
DIMENSIONS	4.4	Lift	h3	mm	202	202
	4.9	Height drawbar in driving position min./max.	h14	mm	1150	1430
	4.19	Height, lowered	h13	mm	82	82
	4.19	Overall length	l1	mm	1760	1760
	4.20	Length to face of forks	l2	mm	610	610
	4.21	Overall width	b1/b2	mm	775	775
	4.22	Fork dimensions DIN ISO 2331	s/e/l	mm	53 x 180 x 1150	53 x 180 x 1150
	4.25	Distance between fork-arms	b5	mm	550 / 685	550 / 685
	4.32	Ground clearance, centre of wheelbase	m2	mm	28	28
	4.34.1	Aisle width for pallets 1000 × 1200 crossways	Ast	mm	1960	1960
	4.34.4	Aisle width for pallets 800 × 1200 lengthways	Ast	mm	2010	2010
	4.35.1	Turning radius	Wa	mm	1600	1600
PERFORMANCE	5.1	Travel speed with / without load		km/h	7.0	7.1
	5.2	Lifting speed with / without load		m/s	0.039	0.056
	5.3	Lowering speed with / without load		m/s	0.064	0.050
	5.7	Gradeability - 1.6 km/h, with / without load		%	6	18
	5.9	Max. gradeability - 1.6 km/h, with / without load		%	8	20
	5.10	Service brake			Electromagnetic brake	Electromagnetic brake
	6.2	Drive motor		kW	1.2	1.2
	6.3	Lift motor		kW	0.8 / 1.2	0.8 / 1.2
	6.4	Battery voltage/nominal capacity K5		V/Ah	24V / 210Ah	24V / 210Ah
	6.5	Battery weight		kg	170	170
	10.7	Average noise level at the operator's ear according to EN 12053		dB (A)	70	70

Performance modes:

(6.2) Standard - Drive motor 1,2 kW and lift motor 0,8 kW

(6.3) Power plus - Drive motor 1,2 kW and lift motor 1,2 kW



HYSTER EUROPE

HYSTER-YALE UK LIMITED trading as Hyster Europe. Registered in England and Wales. Company Registration Number: 02636775.

Registered Address: Centennial House, Building 4.5, Frimley Business Park, Frimley, Surrey, GU16 7SG, United Kingdom

Hyster.com

SAFETY: Hyster® products sold into EU countries, UK, and Turkey conform to applicable EU, UK, and Turkey legislation (including Machinery Directive 2006/42/EC) and are CE marked. Hyster products sold into other countries may be ordered in conformance with EU requirements and will likewise be CE marked.

NOTICE: Care must be exercised when operating material handling equipment. Operators must be trained and must read, understand and follow the instructions contained in the operating manual. Products may be shown with optional equipment and/or features not available in all regions. Product performance may be affected by its condition, how it is equipped and the application. Specifications are subject to change without notice. Consult your Hyster® Dealer if any of the information shown is critical to your application.

© 2026 Hyster-Yale Materials Handling, Inc., all rights reserved. HYSTER and HYSTER LOGO are trademarks of Hyster-Yale Materials Handling, Inc.