

J50-70AL

WITH INTEGRATED LITHIUM-ION BATTERY

HYSTER



LITHIUM-ION POWERED


- 80V integrated 420Ah li-ion battery provides long periods of truck operation before the need for recharging
- 100% battery state of charge from fully flat within two hours
- Li-ion batteries can support intensive three-shift operations without battery exchange (via fast opportunity charging)

REDUCED TRUCK WEIGHT

- The truck weighs just over 660 pounds less than the equivalent lead-acid powered model
- This reduction in truck weight improves acceleration and reduces energy consumption for long run times in demanding applications

VIRTUALLY MAINTENANCE-FREE

- Virtually maintenance-free components
- Li-ion batteries cut down on maintenance requirements and do not require topping up or equalization charging
- Li-ion batteries are seen as a more environmentally attractive solution for power

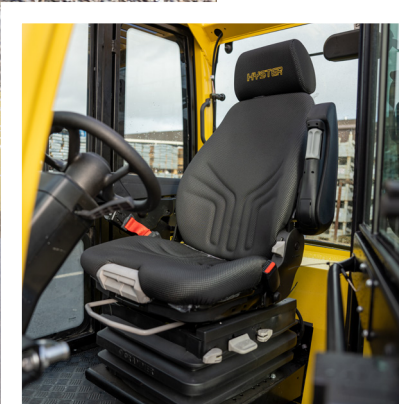

TOP 5 PRODUCT FEATURES

1 ENERGY EFFICIENT

- Fast charging times increase operational uptime
- Opportunity charging has no adverse effect on battery life
- Truck retains full suite of low state of charge safety features

2 LOWERED SEAT AND FLOOR PLATE

- Allows easy ingress and egress from the truck
- Cowl lower by 3 inches to allow better fork tip visibility
- Allows for mounting an air suspension seat with upgraded operator comfort for maximum productivity
- Increased headroom and freedom to move

3 OPEN SPACE DESIGN

- Maximizes comfort and convenience
- Gives increased freedom to position feet during operation

4 REPOSITIONED CENTER OF GRAVITY

- Enhances drive quality
- Improves truck handling in corners

5 EASY OPERATION

- External charge socket allows quick and easy connection
- No battery exchange process needed



www.hyster.com

Hyster Company, P.O. Box 7006, Greenville, North Carolina 27835-7006

©2026 Hyster-Yale Materials Handling, Inc. all rights reserved. Hyster and  are trademarks of Hyster-Yale Materials Handling, Inc. Trucks may be shown with optional equipment and/or features not available in all regions.

HFC1FC001_E_EN-US_V1R0_072026