



K1.0 SERIES

MEDIUM AND HIGH LEVEL ORDER PICKER
Product Technical Guide



K1.0L | K1.0L SL SPECIFICATIONS

			HYSTER		HYSTER		HYSTER		HYSTER						
			K1.0L AC 0.7 FC		K1.0L AC 1.4 FC		K1.0L AC 1.2		K1.0L AC 1.2 SL						
GENERAL	1-1	Manufacturer													
	1-2	Model designation													
	1-3	Drive		Battery		Battery		Battery		Battery					
	1-4	Operator type		Order-picker		Order-picker		Order-picker		Order-picker					
	1-5	Rated capacity / rated load	Q ₁	t	1		1		1						
	1-6	Load centre distance	c	mm	600		600		600						
	1-8	Load distance, centre of drive axle to fork ⁽¹⁾	x	mm	144		96		166						
	1-9	Wheelbase	y	mm	1391		1391		1391						
	WEIGHT	2-1	Service weight ⁽⁹⁾⁽¹⁰⁾		kg		1550		1750		1600		1700		
2-2		Axle loading with load, front / rear		kg		350 2200		350 2400		350 2250		350 2350			
2-3		Axle loading without load, front / rear		kg		900 650		950 800		900 700		950 750			
WHEELS	3-1	Tyre type		NDIIThane		NDIIThane		NDIIThane		NDIIThane					
	3-2	Tyre size, front	Ø	mm x mm	254 x 125		254 x 125		254 x 125						
	3-3	Tyre size, rear	Ø	mm x mm	125 x 94		125 x 94		125 x 94						
	3-5	Wheels, number front / rear (x = driven wheels)				1x 2		1x 2		1x 2		1x 2			
	3-7	Tread, rear	b ₁₁	mm	660		660		660		660				
DIMENSIONS	4-2	Height of mast, lowered		h ₁		mm		1074		1794		1654		1654	
	4-4	Lift		h ₃		mm		690		1410		1010		1010	
	4-5	Height of mast, extended ⁽²⁾		h ₄		mm		-		2664		2664			
	4-7	Over head guard height (cabin) ⁽²⁾		h ₆		mm		1957 ⁽¹¹⁾		-		-			
	4-8	Seat height relating to SIP/stand height		h ₇		mm		180		180		180			
	4-11	Additional lift		h ₉		mm		-		-		690			
	4-14	Stand height, elevated		h ₁₂		mm		-		1190		1190			
	4-15	Height, lowered		h ₁₃		mm		80 ⁽³⁾		80		80 ⁽³⁾			
	4-19	Overall length ⁽¹⁾⁽⁸⁾		l ₁		mm		2907		2874		2929			
	4-20	Length to face of forks ⁽¹⁾⁽⁸⁾		l ₂		mm		1767		1719		1789			
	4-21	Overall width ⁽⁴⁾		b ₁ /b ₂		mm		796		780		780			
	4-22	Fork dimensions ⁽⁵⁾		s/e/l		mm		60 180 1140		60 180 1155		60 180 1140			
	4-23	Fork carriage ISO 2328, Class/form A,B						No		No		No			
	4-24	Fork carriage width ⁽⁶⁾		b ₃		mm		700		-		700			
	4-25	Distance between fork-arms ⁽⁷⁾		b ₅		mm		560		526		560			
	4-31	Ground clearance under mast, with load		m ₁		mm		135		135		135			
	4-32	Ground clearance, centre of wheelbase		m ₂		mm		30		30		30			
	4-33	Load dimension b ₁₂ × l ₆ crossways		b ₁₂ × l ₆		mm		800 x 1200		800 x 1200		800 x 1200			
	4-34-1	Transfer aisle width for pallets 1000mm x 1200mm lengthwise ⁽⁷⁾		A _{st}		mm		3270		3226		3291			
	4-34-2	Transfer aisle width for pallets 800mm x 1200mm lengthwise ⁽⁷⁾		A _{st}		mm		3238		3193		3260			
4-35	Turning radius		W _a		mm		1636		1636		1636				
PERFORMANCE	5-1	Travel speed, laden/unladen		km/h		10.1		10.5		10.1 10.5		10.1 10.5			
	5-2	Lift speed, laden/unladen (CAB)		m/s		-		-		0.17 0.25		0.11 0.21			
	5-2	Lift speed, laden/unladen (SL)		m/s		0.09		0.18		-		0.09 0.18			
	5-3	Lowering speed, laden/unladen (CAB)		m/s		-		-		0.29 0.25		0.26 0.14			
	5-3	Lowering speed, laden/unladen (SL)		m/s		0.20		0.07		-		0.20 0.07			
	5-7	Gradeability, laden/unladen		%		5.0		8.0		5.0 8.0		5.0 8.0			
	5-8	Max. gradeability, laden/unladen		%		5.0		8.0		5.0 8.0		5.0 8.0			
	5-9	Acceleration time, laden/unladen		s		5.5		7.5		5.5 7.5		5.5 7.5			
	5-10	Service brake						Electromagnetic		Electromagnetic		Electromagnetic			
	ELECTRIC ENGINE	6-1	Drive motor, S2 60 minute rating		kW		4		4		4		4		
6-2		Lifting motor, S3 15% rating		kW		2		2		3		3			
6-3		Battery according to DIN 43531/35/36 A,B,C, no						No		No		No			
6-4		Battery voltage/nominal capacity K ₅		V/Ah		24		500		24 620 ⁽¹⁰⁾		24 620 ⁽¹⁰⁾			
6-5		Battery weight ⁽⁹⁾		kg		370		370		485		485			
6-6		Energy consumption according to VDI cycle		kWh/h		2.28		2.35		2.30		2.38			
8-1	Type of drive unit						AC-Controller		AC-Controller		AC-Controller				
10-7	Sound pressure level at the driver's seat		dB (A)				< 70		< 70		< 70				

NOTES:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster® truck.

- (1) Note for SL model:
With FEM like carriage and forks 80 x 30 mm + 20 mm
With FEM like carriage and forks 100 x 35 mm + 25 mm
- (2) Note for models with over head guard: with lift interrupt mounted on OHG h₆ + 80 mm
- (3) Note for SL model:
With FEM like carriage and forks 80 x 30 mm and 100 x 35 mm h₁₃ = 40 mm
- (4) Note for SL model: with FEM like carriage b₂ = 800 mm

- (5) Note for SL model:
Available also FEM like carriage and fork size 80 x 30 mm (600 Kg @ 600 mm, 800 Kg @ 500 mm, 1000 Kg @ 400 mm) and 100 x 35 mm with 1000 Kg @ 600 mm
- (6) Note for SL model: with FEM like carriage b₃ = 800 mm
- (7) Note for SL model:
With FEM like carriage and forks 80 x 30 mm b₅ = 753 mm
With FEM like carriage and forks 100 x 35 mm b₅ = 773 mm
- (8) With wire guidance l1 and l2 + 40mm
- (9) These values may vary of +/- 5%
- (10) Available battery 560Ah. With battery 560Ah service weight -9kg
- (11) Model without cabin; the value is referred to the overall height, without load backrest
- (12) Models name referred to h₁₂



Safety: This truck conforms to the current EU requirements.

Specification data is based on VDI 2198.

K1.0L SL | K1.0L WP SPECIFICATIONS

GENERAL	1-1		HYSTER		HYSTER		HYSTER		HYSTER			
	1-2	Model designation		K1.0L AC 1.7 SL ⁽¹³⁾		K1.0L AC 1.7 WP ⁽¹⁴⁾		K1.0L AC 4.8 SL ⁽¹⁵⁾		K1.0L AC 4.8 WP ⁽¹⁶⁾		
1-3	Drive		Battery		Battery		Battery		Battery			
1-4	Operator type		Order-picker		Order-picker		Order-picker		Order-picker			
1-5	Rated capacity / rated load	Q ₁ t	1		1		1		1			
1-6	Load centre distance	c mm	600		600		600		600			
1-8	Load distance, centre of drive axle to fork ⁽¹⁾	x mm	166		166		158		158			
1-9	Wheelbase	y mm	1391		1391		1511		1511			
WEIGHT	2-1	Service weight ⁽⁹⁾⁽¹⁰⁾	kg		1800		2000		2736		2875	
	2-2	Axle loading with load, front / rear	kg		350 2450		350 2650		1034 2702		1223 2652	
	2-3	Axle loading without load, front / rear	kg		950 850		950 1050		1523 1213		1755 1120	
WHEELS	3-1	Tyre type	NDIIThane		NDIIThane		NDIIThane		NDIIThane		NDIIThane	
	3-2	Tyre size, front	ø mm x mm	254 x 125								
	3-3	Tyre size, rear	ø mm x mm	125 x 94								
	3-5	Wheels, number front / rear (x = driven wheels)			1x 2		1x 2		1x 2		1x 2	
	3-7	Tread, rear	b ₁₁ mm	660		660		830		830		
DIMENSIONS	4-2	Height of mast, lowered	h ₁ mm	2270		2270		3075		3075		
	4-4	Lift	h ₃ mm	1530		1530		4628		4628		
	4-5	Height of mast, extended ⁽²⁾	h ₄ mm	3800		3800		6898		6898		
	4-7	Over head guard height (cabin) ⁽²⁾	h ₆ mm	2270		2270		2270		2270		
	4-8	Seat height relating to SIP/stand height	h ₇ mm	180		180		180		180		
	4-11	Additional lift	h ₈ mm	690		-		690		-		
	4-14	Stand height, elevated	h ₁₂ mm	1710 ⁽¹²⁾		1710 ⁽¹²⁾		4808 ⁽¹²⁾		4808 ⁽¹²⁾		
	4-15	Height, lowered	h ₁₃ mm	80 ⁽³⁾		80		80 ⁽³⁾		80		
	4-19	Overall length ⁽¹⁾⁽⁸⁾	l ₁ mm	2929		3099		3040		3220		
	4-20	Length to face of forks ⁽¹⁾⁽⁸⁾	l ₂ mm	1789		1789		1900		1910		
	4-21	Overall width ⁽⁴⁾	b ₁ / b ₂ mm	780		780 996		950		950 996		
	4-22	Fork dimensions ⁽⁵⁾	s / e / l mm	60 180 1140		60 180 1140		60 180 1140		60 180 1140		
	4-23	Fork carriage ISO 2328, Class/form A,B			No		No		No		No	
	4-24	Fork carriage width ⁽⁶⁾	b ₃ mm	700		880		700		880		
	4-25	Distance between fork-arms ⁽⁷⁾	b ₅ mm	560		560		560		560		
	4-31	Ground clearance under mast, with load	m ₁ mm	135		135		135		135		
	4-32	Ground clearance, centre of wheelbase	m ₂ mm	30		30		30		30		
	4-33	Load dimension b ₁₂ × l ₆ crossways	b ₁₂ × l ₆ mm	800 x 1200								
	4-34-1	Transfer aisle width for pallets 1000mm x 1200mm lengthwise ⁽¹⁷⁾	A _{st} mm	3291		-		3401		-		
	4-34-2	Transfer aisle width for pallets 800mm x 1200mm lengthwise ⁽¹⁷⁾	A _{st} mm	3260		-		3370		-		
4-35	Turning radius	W _a mm	1636		1636		1754		1754			
PERFORMANCE	5-1	Travel speed, laden/unladen	km/h	10.1 10.5		10.1 10.5		8.6 9.5		8.6 9.5		
	5-2	Lift speed, laden/unladen (CAB)	m/s	0.11 0.21		0.15 0.20		0.15 0.20		0.15 0.20		
	5-2	Lift speed, laden/unladen (SL)	m/s	0.09 0.18		-		0.09 0.18		-		
	5-3	Lowering speed, laden/unladen (CAB)	m/s	0.26 0.14		0.28 0.24		0.27 0.23		0.28 0.24		
	5-3	Lowering speed, laden/unladen (SL)	m/s	0.20 0.07		-		0.20 0.07		-		
	5-7	Gradeability, laden/unladen	%	5.0 8.0		5.0 8.0		5.0 8.0		5.0 8.0		
	5-8	Max. gradeability, laden/unladen	%	5.0 8.0		5.0 8.0		5.0 8.0		5.0 8.0		
	5-9	Acceleration time, laden/unladen	s	5.5 7.5		5.5 7.5		5.5 7.5		5.5 7.5		
	5-10	Service brake			Electromagnetic		Electromagnetic		Electromagnetic		Electromagnetic	
	ELECTRIC ENGINE	6-1	Drive motor, S2 60 minute rating	kW	4		4		4		4	
6-2		Lifting motor, S3 15% rating	kW	3		3		3		3		
6-3		Battery according to DIN 43531/35/36 A,B,C, no			No		No		No			
6-4		Battery voltage/nominal capacity K ₅	V/Ah	24 620 ⁽¹⁰⁾								
6-5		Battery weight ⁽⁹⁾	kg	485		485		485		485		
6-6		Energy consumption according to VDI cycle	kWh/h	2.40		2.40		2.86		2.90		
8-1	Type of drive unit			AC-Controller		AC-Controller		AC-Controller		AC-Controller		
10-7	Sound pressure level at the driver's seat	dB (A)	< 70		< 70		< 70		< 70			

NOTES:

(13) Available models K1.0L AC 1.9 SL / M010E AC 19 SL

(14) Available models K1.0L AC 1.9 WP / M010E AC 19 WP

(15) Available models K1.0L AC 3.2-3.6-4.0-4.4 SL / M010E AC 32-36-40-44 SL

(16) Available models K1.0L AC 3.2-3.6-4.0-4.4 WP / M010E AC 32-36-40-44 WP

(17) Transfer aisle widths (lines 4.34.1 & 4.34.2) are based on the VDI standard calculation as shown on illustration. The British Industrial Truck Association recommends the addition of 100 mm to the total clearance (dimension a) for extra operating margin at the rear of the truck.

NOTICE:

Care must be exercised when handling elevated loads. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.



Safety: This truck conforms to the current EU requirements.

Specification data is based on VDI 2198.

MAST INFORMATION – K1.0L, K1.0L SL, K1.0L WP

Values shown are for standard equipment. When using non-standard equipment these values may change. Please contact your Hyster dealer for information.

MASTS – 1 STAGE

	LIFT HEIGHT H_3 MM	FREE LIFT (PALLET FORKS) H MM ^{(1) (2)}	HEIGHT, MAST LOWERED H_1 MM	HEIGHT, MAST EXTENDED H_4 MM	STAND HEIGHT, ELEVATED H_{12} MM
1-STAGE LIMITED FREE LIFT	1010	1780	1654	2664	1190
	1530	2300	2270	3800	1710
	1690	2460	2270	3960	1870

MASTS – 2 STAGE LFL SL

	LIFT HEIGHT H_3 MM	FREE LIFT (PALLET FORKS) H MM	HEIGHT, MAST LOWERED H_1 MM	HEIGHT, MAST EXTENDED H_4 MM	STAND HEIGHT, ELEVATED H_{12} MM
2-STAGE LIMITED FREE LIFT	3028	3798	2275	5298	3208
	3428	4198	2475	5698	3608
	3828	4598	2675	6098	4008
	4228	4998	2875	6498	4408
	4628	5398	3075	6898	4808


(1) For models WP -690mm

(2) Note for SL model: with FEM like carriage and forks 80 x 30 mm and 100 x 35 mm H -40 mm


All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer. Hyster products might be subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

TRUCK DIMENSIONS

K1.0L AC 0.7 FC

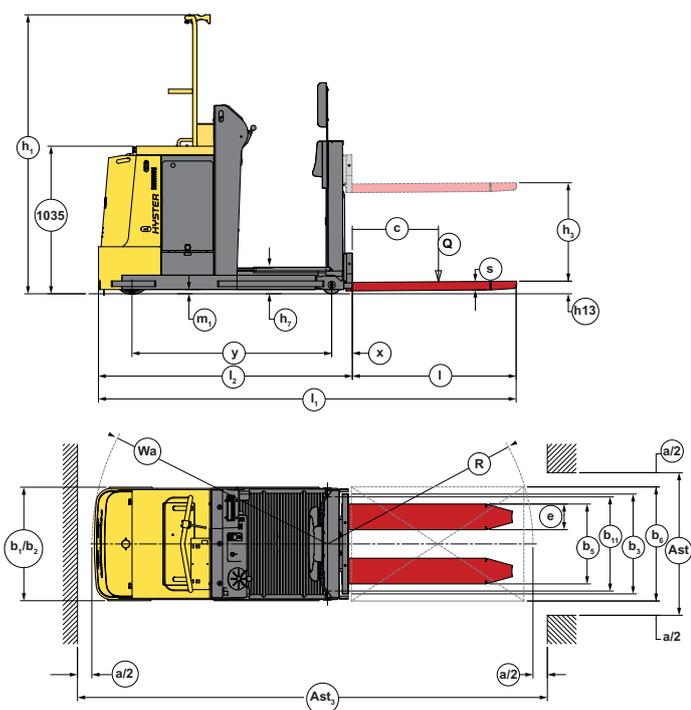


K1.0L AC 1.4 FC

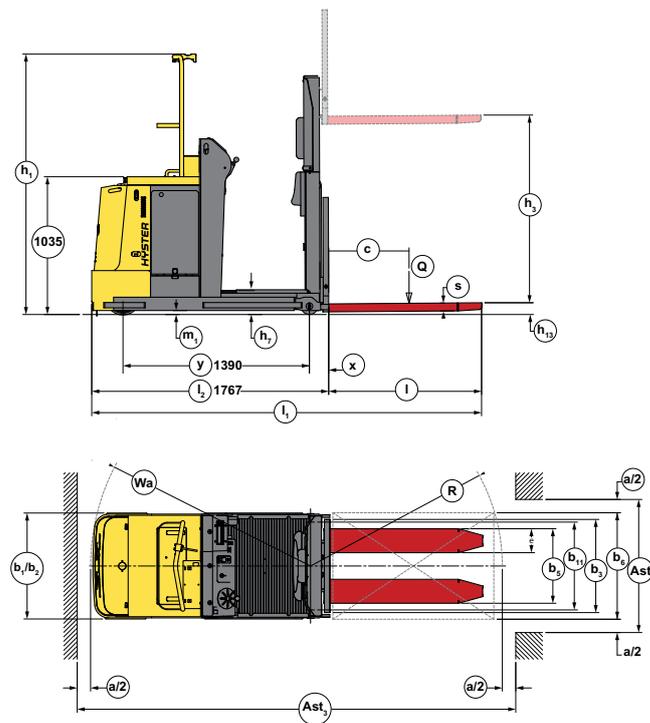

TRUCK DIMENSIONS

K1.0L AC 4.8 WP

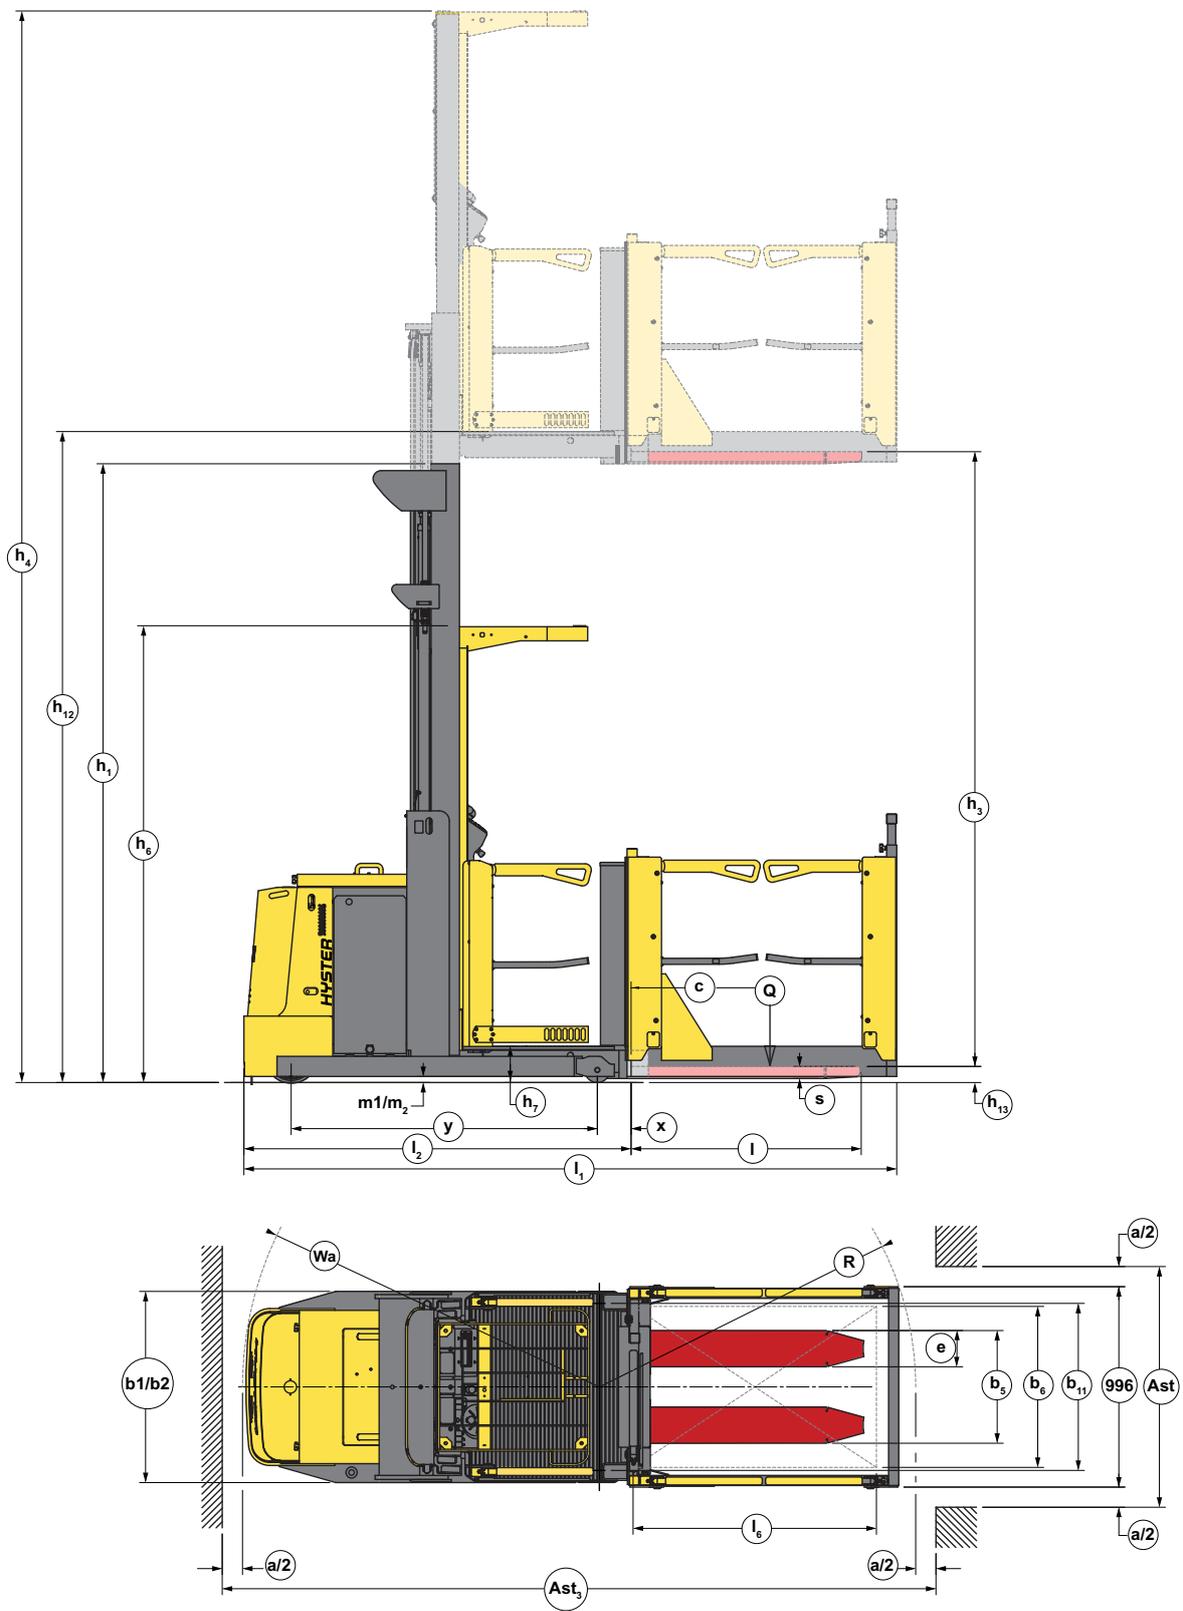

K1.0M | K1.0H SPECIFICATIONS

			HYSTER		HYSTER		HYSTER				
			K1.0M		K1.0H		K1.0H				
GENERAL	1-1	Manufacturer		HYSTER		HYSTER		HYSTER			
	1-2	Model designation		K1.0M		K1.0H		K1.0H			
	1-3	Drive		Battery		Battery		Battery			
	1-4	Operator type		Order-picker		Order-picker		Order-picker			
	1-5	Rated capacity / rated load	Q ₁	t	1		1		1		
	1-6	Load centre distance	c	mm	600		600		600		
	1-8	Load distance, centre of drive axle to fork ⁽¹⁾	x	mm	190		150 (2)		205 (3)		
	1-9	Wheelbase	y	mm	1534.5		1574.5		1674.5		
	WEIGHT	2-1	Service weight ⁽⁸⁾		2890		3259		4073		
2-2		Axle loading with load, front / rear		1060	2830	1509	2750	1763	3310		
2-3		Axle loading without load, front / rear		1650	1240	1942	1317	2204	1869		
WHEELS	3-1	Tyre type		NDIIThane		NDIIThane		NDIIThane			
	3-2	Tyre size, front	∅	mm x mm	343 x 140		343 x 140		343 x 140		
	3-3	Tyre size, rear	∅	mm x mm	200 x 80		200 x 80		200 x 100		
	3-5	Wheels, number front / rear (x = driven wheels)		1 x / 2		1 x / 2		1 x / 2			
	3-7	Tread, rear	b ₁₁	mm	877		977		1057		
DIMENSIONS	4-2	Height of mast, lowered		h ₁		3070		3320		3720	
	4-4	Lift		h ₃		4670		5170		8895	
	4-5	Height of mast, extended ⁽⁴⁾⁽⁵⁾		h ₄		7040		7540		11265	
	4-7	Over head guard height (cabin) ⁽⁴⁾⁽⁵⁾		h ₆		2370		2370		2370	
	4-8	Seat height relating to SIP/stand height		h ₇		250		250		250	
	4-11	Additional lift		h ₉		770		770		770	
	4-14	Stand height, elevated		h ₁₂		4920		5420		9145	
	4-15	Height, lowered ⁽⁶⁾		h ₁₃		80		80		80	
	4-19	Overall length ⁽¹⁾		l ₁		3087		3087		3242	
	4-20	Length to face of forks ⁽¹⁾		l ₂		1947		1947		2102	
	4-21	Overall width		b ₁ / b ₂		1000 / 1000		1100 / 1100		1100 / 1200	
	4-22	Fork dimensions ⁽⁷⁾		s/e/l		60 / 180 / 1140		60 / 180 / 1140		60 / 180 / 1140	
	4-23	Fork carriage ISO 2328, class/type A,B		II A		No		No		No	
	4-24	Fork carriage width ⁽⁸⁾		b ₃		780 (14)		780 (14)		780 (14)	
	4-25	Distance between fork-arms ⁽⁹⁾		b ₅		560 (15)		560 (15)		560 (15)	
	4-27	Width across guide rollers		b ₆		1130 (16)		1230 (17)		1430	
	4-31	Ground clearance under mast, with load		m ₁		80		80		80	
	4-34-1	Transfer aisle width for pallets 1000mm x 1200mm lengthwise ⁽¹⁰⁾		A _{st}		3444		3448		3596	
	4-35	Turning radius		W _a		1767		1808		1905	
	PERFORMANCE	5-1	Travel speed, laden/unladen		km/h		10 / 10		10 / 10		10 / 10
5-2		Lift speed, laden/unladen (CAB)		m/s		0.35 / 0.42		0.31 / 0.42		0.31 / 0.42	
5-2		Lift speed, laden/unladen (SL)		m/s		0.22 / 0.24		0.20 / 0.24		0.20 / 0.24	
5-3		Lowering speed, laden/unladen (CAB)		m/s		0.37 / 0.37		0.38 / 0.38		0.38 / 0.38	
5-3		Lowering speed, laden/unladen (SL)		m/s		0.14 / 0.12		0.14 / 0.12		0.14 / 0.12	
5-7		Gradeability, laden/unladen		%		6.3		6.2		5.8	
5-10		Service brake				Electromagnetic		Electromagnetic		Electromagnetic	
ELECTRIC ENGINE	6-1	Drive motor, S2 60 minute rating		kW		6.4		6.4		6.4	
	6-2	Lifting motor, S3 15% rating		kW		12		12		12	
	6-3	Battery according to DIN 43531/35/36 A,B,C, no				No		DIN 43531 B		DIN 43531 B	
	6-4	Battery voltage/nominal capacity K5		V/Ah		48 310 ⁽¹¹⁾		48 465 ⁽¹²⁾⁽²⁰⁾		48 620 ⁽¹³⁾⁽²⁰⁾	
	6-5	Battery weight ⁽⁸⁾		kg		532		750		945	
	6-6	Energy consumption according to VDI cycle		kWh/h		3.27		3.27		3.27	
	8-1	Type of drive unit				AC-Controller		AC-Controller		AC-Controller	
10-7	Sound pressure level at the driver's seat		dB [A]		59		59		59		

NOTES:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster® truck.

- (1) With FEM like carriage and Forks 100x35 add + 25mm
- (2) With TX mast add 55mm
- (3) With DX mast reduce 55mm
- (4) With Lift interrupt mounted on OHG: h₆ e h₄ are increased by 105mm
- (5) With flashing light fitted on Over Head Guard: h₆ e h₄ are increased by 120 mm
- (6) With FEM like carriage and Forks 80x30 and 100x35 h₁₃ = 40 mm
- (7) Available also FEM like carriage and fork size 100x35 with 1000 Kg @ 600 mm
- (8) With FEM like carriage b₃ = 800mm
- (9) With FEM like carriage and Forks 100x35 b₅ max = 773mm
- (10) Sensor height 30mm from the ground
- (11) Additional battery available: 48/280 (541kg)
- (12) Additional battery available: 48/420 (746kg)

(13) Additional battery available: 48/560 (937kg)

(14) Available 700mm and 860mm

(15) Available 520mm, 680mm, 830mm

(16) Available 1075mm and 1330mm

(17) Available 1175mm and 1430mm

(18) These values may vary of +/- 5%

(19) Transfer aisle widths (lines 4.34.1 & 4.34.2) are based on the VDI standard calculation as shown on illustration. The British Industrial Truck Association recommends the addition of 100 mm to the total clearance (dimension a) for extra operating margin at the rear of the truck.

(20) Available Li-ion battery 48V / 360 (937kg)

NOTICE:

Care must be exercised when handling elevated loads. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual. All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer. Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.





Safety: This truck conforms to the current EU requirements.

Specification data is based on VDI 2198.

TRUCK DIMENSIONS

K1.0M-K1.0H

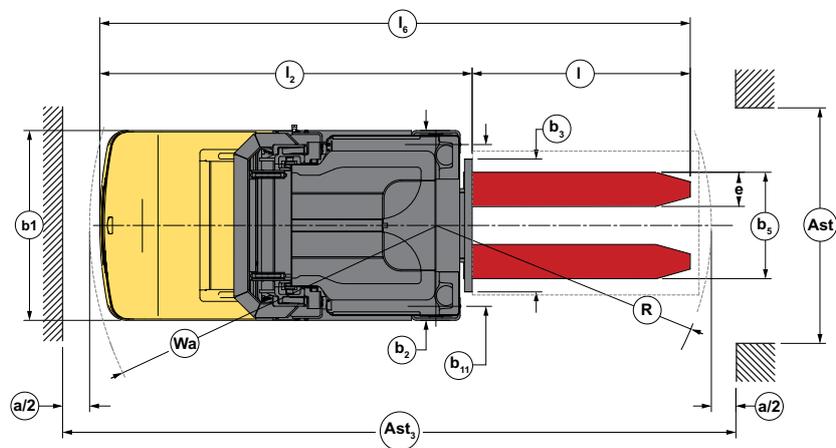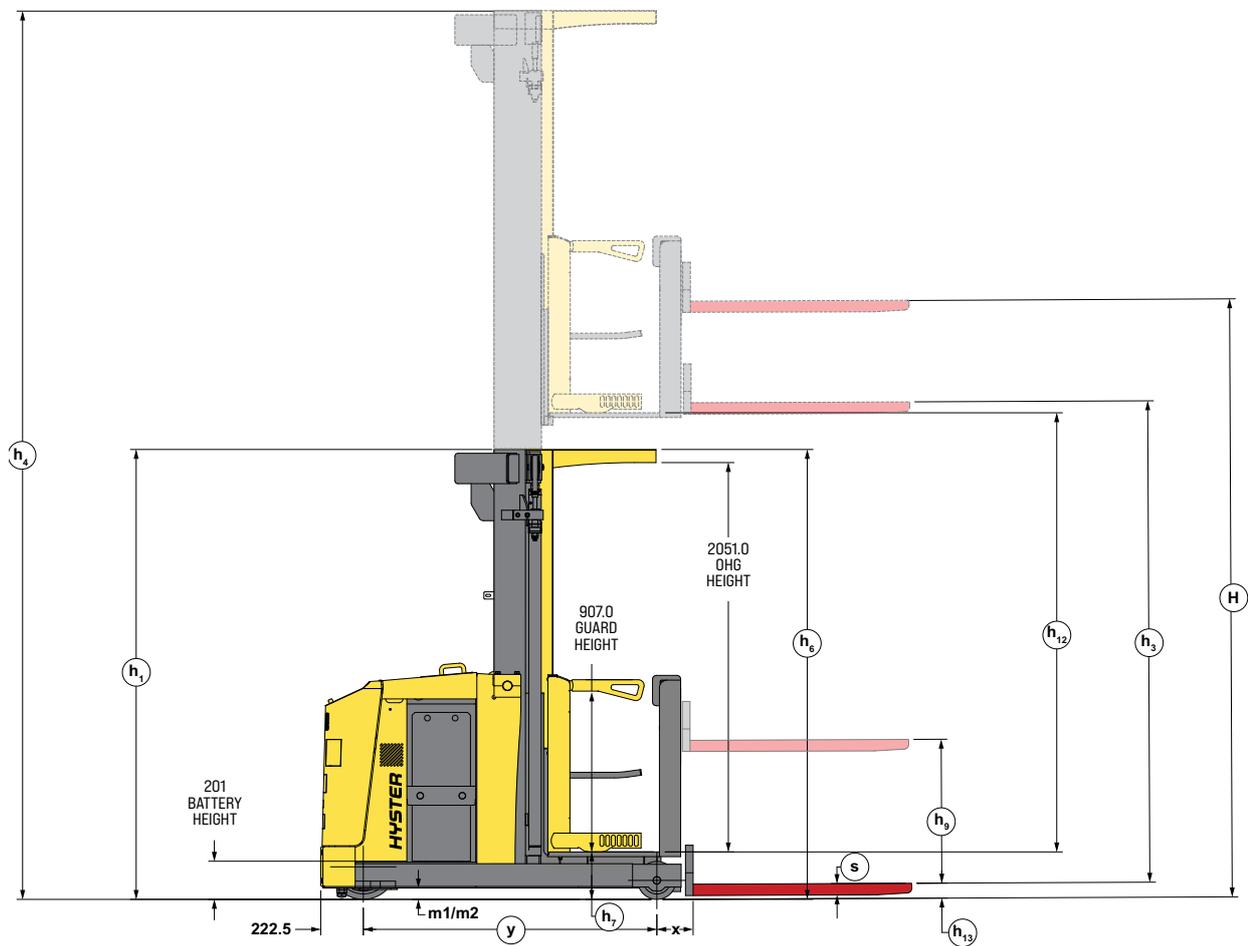

MAST DIMENSIONS | K1.0M, K1.0H

Values shown are for standard equipment. When using non-standard equipment these values may change. Please contact your Hyster dealer for information.

MASTS - 2 STAGE SL

	LIFT HEIGHT H ₃ MM	FREE LIFT H ₂ MM ⁽¹⁾⁽²⁾	HEIGHT, MAST LOWERED H ₁ MM	HEIGHT, MAST EXTENDED H ₄ MM	HEIGHT, OVERHEAD GUARD H ₁₂ MM
2-STAGE	3270	4120	2370	5640	3520
	3370	4220	2420	5740	3620
	3470	4320	2470	5840	3720
	3570	4420	2520	5940	3820
	3670	4520	2570	6040	3920
	3770	4620	2620	6140	4020
	3870	4720	2670	6240	4120
	3970	4820	2720	6340	4220
	4070	4920	2770	6440	4320
	4170	5020	2820	6540	4420
	4270	5120	2870	6640	4520
	4370	5220	2920	6740	4620
	4470	5320	2970	6840	4720
	4570	5420	3020	6940	4820
	4670	5520	3070	7040	4920
	4770	5620	3120	7140	5020
	4870	5720	3170	7240	5120
	4970	5820	3220	7340	5220
	5070	5920	3270	7440	5320
	5170	6020	3320	7540	5420
	5270	6120	3370	7640	5520
	5370	6220	3420	7740	5620
	5470	6320	3470	7840	5720
	5570	6420	3520	7940	5820
	5670	6520	3570	8040	5920
	5770	6620	3620	8140	6020
	5870	6720	3670	8240	6120
	5970	6820	3720	8340	6220
	6070	6920	3770	8440	6320
	6170	7020	3820	8540	6420
6270	7120	3870	8640	6520	
6370	7220	3920	8740	6620	
6470	7320	3970	8840	6720	
6570	7420	4020	8940	6820	
6670	7520	4070	9040	6920	

(1) For models WP -770 mm

(2) Note for SL model: with FEM like carriage and Forks 80x30 and 100x35 H -40 mm

MASTS - 3 STAGE SL

	LIFT HEIGHT H ₃ MM	FREE LIFT H ₂ MM ⁽¹⁾⁽²⁾	HEIGHT, MAST LOWERED H ₁ MM	HEIGHT, MAST EXTENDED H ₄ MM	HEIGHT, OVERHEAD GUARD H ₁₂ MM
3-STAGE	4845	5695 ⁽¹⁾	2370	7215	5095
	4995	5845	2420	7365	5245
	5145	5995 ⁽¹⁾	2470	7515	5395
	5295	6145	2520	7665	5545
	5445	6295	2570	7815	5695
	5595	6445	2620	7965	5845
	5745	6595 ⁽¹⁾	2670	8115	5995
	5895	6745	2720	8265	6145
	6045	6895	2770	8415	6295
	6195	7045	2820	8565	6445
	6345	7195 ⁽¹⁾	2870	8715	6595
	6495	7345	2920	8865	6745
	6645	7495	2970	9015	6895
	6795	7645	3020	9165	7045
	6945	7795 ⁽¹⁾	3070	9315	7195
	7095	7945	3120	9465	7345
	7245	8095	3170	9615	7495
	7395	8245	3220	9765	7645
	7545	8395 ⁽¹⁾	3270	9915	7795
	7695	8545	3320	10065	7945
	7845	8695	3370	10215	8095
	7995	8845	3420	10365	8245
	8145	8995 ⁽¹⁾	3470	10515	8395
	8295	9145	3520	10665	8545
	8445	9295	3570	10815	8695
	8595	9445	3620	10965	8845
	8745	9595 ⁽¹⁾	3670	11115	8995
	8895	9745	3720	11265	9145

(1) For models WP -770mm

(2) Note for SL model: with FEM like carriage and Forks 80x30 and 100x35 H -40 mm

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products might be subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

K1.OH WP SPECIFICATIONS

	GENERAL		HYSTER		HYSTER	
			K1.OH WP		K1.OH WP	
1-1	Manufacturer		HYSTER		HYSTER	
1-2	Model designation		K1.OH WP		K1.OH WP	
1-3	Drive		Battery		Battery	
1-4	Operator type		Order-picker		Order-picker	
1-5	Rated capacity / rated load	Q ₁ t	1		1	
1-6	Load centre distance	c mm	600		600	
1-8	Load distance, centre of drive axle to fork	x mm	162.5		162.5	
1-9	Wheelbase	y mm	1574.5		1674.5	
2-1	Service weight ⁽⁵⁾	kg	3343		4161	
2-2	Axle loading with load, front / rear	kg	1539	2804	1573	3588
2-3	Axle loading without load, front / rear	kg	1992	1351	2154	2007
3-1	Tyre type		NDIIThane		NDIIThane	
3-2	Tyre size, front	ø mm x mm	343 x 140		343 x 140	
3-3	Tyre size, rear	ø mm x mm	200 x 80		200 x 100	
3-5	Wheels, number front / rear (x = driven wheels)		1 x / 2		1 x / 2	
3-7	Tread, rear	b ₁₁ mm	977		1057	
4-2	Height of mast, lowered	h ₁ mm	3320		3470	
4-4	Lift	h ₃ mm	5170		8145	
4-5	Height of mast, extended ⁽¹⁾⁽²⁾	h ₄ mm	7540		10515	
4-7	Over head guard height [cabin] ⁽¹⁾⁽²⁾	h ₆ mm	2370		2370	
4-8	Seat height relating to SIP/stand height	h ₇ mm	250		250	
4-14	Stand height, elevated	h ₁₂ mm	5420		8395	
4-15	Height, lowered	h ₁₃ mm	80		80	
4-19	Overall length	l ₁ mm	3260		3360	
4-20	Length to face of forks	l ₂ mm	1960		2060	
4-21	Overall width	b ₁ /b ₂ mm	1100 / 1100		1100 / 1200	
4-22	Fork dimensions	s/e/l mm	60 / 180 / 1150		60 / 180 / 1150	
4-23	Fork carriage DIN 15173, Class/form A,B		No		No	
4-24	Fork carriage width	b ₃ mm	1080		1280	
4-25	Distance between fork-arms	b ₅ mm	560		560	
4-27	Width across guide rollers	b ₆ mm	1230 (6)		1430	
4-31	Ground clearance under mast, with load	m ₁ mm	80		80	
4-32	Ground clearance, centre of wheelbase	m ₂ mm	60		60	
4-34	Aisle width without pallet or with pallet within cage ⁽⁷⁾	A _{st} mm	3578		3714	
4-35	Turning radius	W _a mm	1808		1905	
5-1	Travel speed, laden/unladen	km/h	10 / 10		10 / 10	
5-2	Lift speed, laden/unladen [SL]	m/s	0.37 / 0.43		0.37 / 0.43	
5-3	Lowering speed, laden/unladen [SL]	m/s	0.38 / 0.38		0.38 / 0.38	
5-7	Gradeability, laden/unladen	%	-		-	
5-10	Service brake		Electromagnetic		Electromagnetic	
6-1	Drive motor, S2 60 minute rating	kW	6.4		6.4	
6-2	Lifting motor, S3 15% rating	kW	12		12	
6-3	Battery according to DIN 43531/35/36 A,B,C, no		DIN 43531 B		DIN 43531 B	
6-4	Battery voltage/nominal capacity K5	V/Ah	48	465 ⁽³⁾⁽⁸⁾	48	620 ⁽⁴⁾⁽⁸⁾
6-5	Battery weight ⁽⁹⁾	kg	750		945	
6-6	Energy consumption according to VDI cycle	kWh/h	3.27		3.27	
8-1	Type of drive unit		AC-Controller		AC-Controller	
10-7	Sound pressure level at the driver's seat		< 70		< 70	

NOTES:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster® truck.

- (1) With Lift interrupt mounted on OHG: h₆ e h₄ are increased by 105mm
- (2) With flashing light fitted on Over Head Guard: h₆ e h₄ are increased by 120 mm
- (3) Additional battery available: 48/420 (746kg)
- (4) Additional battery available: 48/560 (937kg)
- (5) These values may vary of +/- 5%
- (6) Available 1175mm and 1430mm
- (7) Transfer aisle widths (lines 4.34.1 & 4.34.2) are based on the VDI standard calculation as shown on illustration. The British Industrial Truck Association recommends the addition of 100 mm to the total clearance (dimension a) for extra operating margin at the rear of the truck.
- (8) Available Li-ion battery 48V 360 (937kg)

NOTICE:

Care must be exercised when handling elevated loads. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual. All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer. Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.






Safety: This truck conforms to the current EU requirements.

Specification data is based on VDI 2198.

TRUCK DIMENSIONS | K10L AC 48 WP

K1.0H WP

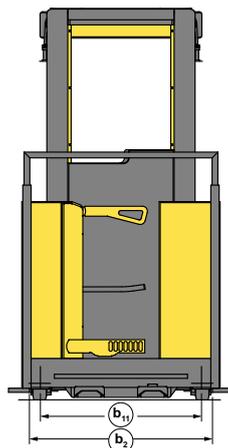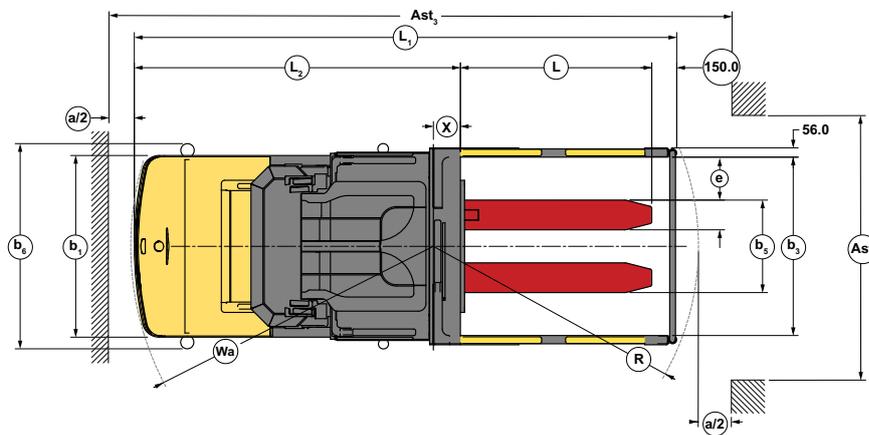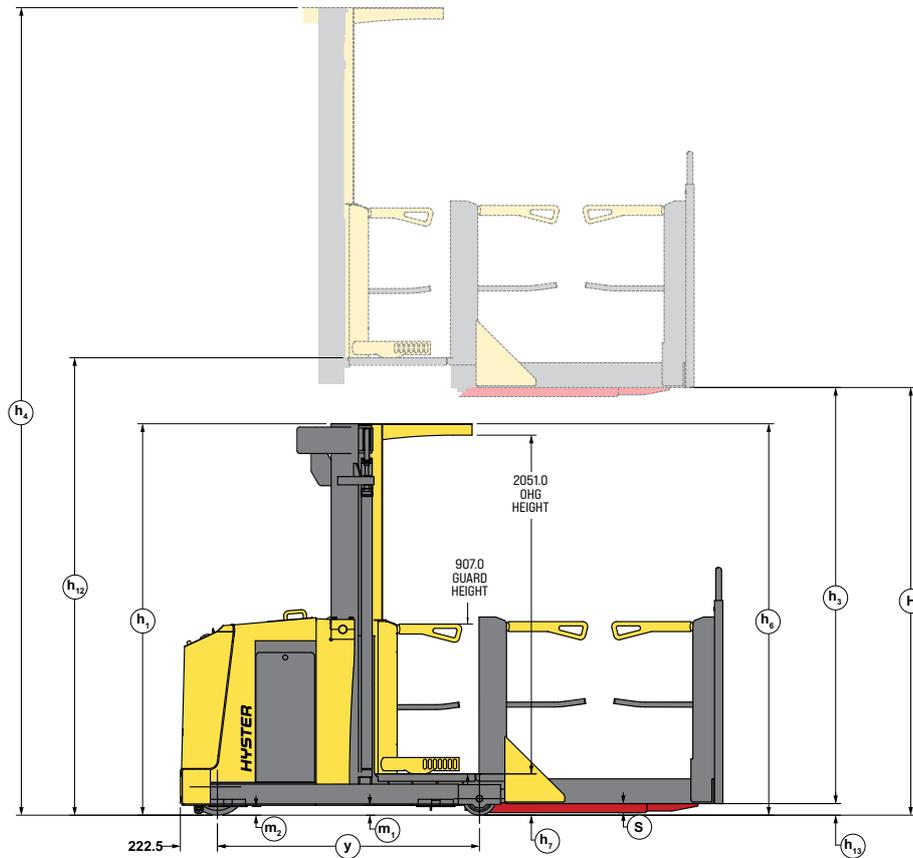

STANDARD EQUIPMENT AND OPTIONS

OPERATOR COMPARTMENT	K1.0L AC 0.7/1.4 FC	K1.0L AC 1.2 SL/WP	K1.0L AC 1.9-4.8 SL/WP	K1.0M SL/WP	K1.0H SL/WP
Drive side facing controls	x	x	x	x	x
Dual drive and load side facing controls	-	-	-	o	o
Electric power steering	x	x	x	x	x
Floor integrated operator presence sensing	x	x	x	x	x
Height indicator	x	x	x	x	x
Storage compartments	x	x	x	x	x
Open operator's compartment - raised floor height (h ₂) < 1200mm	-	x	-	-	-
Enclosed operator's compartment - front and sides	-	-	x	x	x
Fold-up bottom toe plate on side gates (enclosed compartment only)	-	-	x	x	x
LIFT AND TRACTION CONTROL					
Proportional lift/lower control	-	-	x	x	x
Soft stop on lowering	-	-	-	x	x
Emergency lowering from the ground	-	-	x	x	x
Driver select performance settings on traction and lift	x	x	x	x	x
Walk along slow speed advance control from side of truck	x	x	x	x	x
Off board lift / lower control of forks	x	x	x	x	x
LOAD HANDLING					
Walk-on forks - open	-	x (WP)	-	-	-
Walk-on forks - pallet cage with fold-up side-gates / pallet sensing	-	-	x (WP)	-	o
Welded fixed forks - walk-on pallet option	-	x (WP)	x (WP)	-	o
Supplementary lift - fixed fork width	o (0.7 FC)	o (SL)	o (SL)	o	o
Supplementary lift - adjustable fork width	o (0.7 FC)	o (SL)	o (SL)	o	o
Masted lift - fixed fork width	o (1.4 FC)	-	-	-	-
Masted lift - adjustable width forks	o (1.4 FC)	-	-	-	-
Load backrest	o	-	-	-	-
TRAVEL					
Free ranging	x	x	x	x	x
Speed reduction on cornering	x	x	x	x	x
Height / load sensing speed control	-	-	-	x	x
Guide trollers for rail guidance [rail not included]	-	-	o ⁽¹⁾	o	o
Wire guidance (5.2 / 6.25 / 7.0 / 10 kHz)	-	-	o ⁽¹⁾	o	o
End of aisle control options [slow down / stop] via floor magnets	-	-	o ⁽¹⁾	o	o
OPTIONS					
Flashing beacon	o	o	o ⁽²⁾	x	x
Dome light	-	-	o	o	o ⁽³⁾
Fan	-	-	o	-	-
Dome light and fan	-	-	-	o	o
Work lights - facing racks	-	-	o	o	o
Work light - over load	-	-	o	o	o
Lexan overhead guard	-	-	o	o	o
Wire mesh overhead guard	-	-	o	o	o
Lift interrupt with override	-	o	o	o	o
Lift interrupt on overhead guard	-	-	o	o	o
Autostop on lowering (only for SL application)	-	-	-	o	o
Reverse alarm	o	o	o	o	o
Cold store protection	o	o	o	o	o
Clipboard	o	-	o	o	o
RFDT hang-on support	o	-	o	o	o
DC/DC converter 12V	o	o	o	o	o
DC/DC converter 24V	-	-	-	o	o
Antistatic drive tyre	-	-	-	o	o
CONFIGURATION					
Cabin width (mm)	796	780	940	950	1050 - 1150 - 1240 ⁽⁴⁾
Chassis width b ₂ (mm)	796	780	950	1000	1100-1200 ⁽⁵⁾
Fixed cab / supplementary lift - 690 mm	K1.0L AC 0.7 FC	o	o	-	-
Fixed cab / masted fork lift - 1410 mm	K1.0L AC 1.4 FC	-	-	-	-
Rising cab 1 stage mast - raised platform height (h ₂) = 1190 mm	-	x	-	-	-
Rising cab 1 stage mast - raised platform height (h ₂) = 1690 - 1850 mm	-	-	o	-	-
Rising cab 2 stage mast - raised platform height (h ₂) = 3207 - 4807 mm	-	-	o	-	-
Rising cab 2 stage mast - raised platform height (h ₂) = 3520 - 4520 mm	-	-	-	o	-
Rising cab 2 stage mast - raised platform height (h ₂) = 3520 - 6920 mm	-	-	-	-	o
Rising cab 3 stage mast - raised platform height (h ₂) = 5095 - 9145 mm	-	-	-	o	-
POWER					
AC traction	x	x	x	x	x
AC steering	x	x	x	x	x
AC pump motor	-	-	-	x	x
Voltage	24	24	24	48	48
Battery size (Ah)	500	560-620	560-620	280-310	420-620
Regen on lowering	-	-	-	x	x
Battery rollers	x	x	x	x	x
Side battery change table - single bed	o	o	o	o	o
Side battery change table - twin bed	o	o	o ⁽⁶⁾	-	-

NOTE:

- (1) With 2 stage mast only (Raised platform height (h₂) = 3200-4800 mm)
- (2) Required option (Raised platform height (h₂) > 1200 mm)
- (3) With 2 stage mast only

- (4) With walk-on pallet cage - 1140 / 1340 mm
- (5) From raised platform height (h₂) = 8450 mm, 1200 mm chassis required
- (6) Not with rail guidance

PRODUCT FEATURES

DEPENDABILITY

- Strong, welded compact chassis structure enhances maneuverability and allows reliable load handling even in high racking.
- Robust mast construction, with high torsional strength promotes increased stability, leading to greater operator confidence and safer load handling.
- A slack chain detection device, mounted on the mast, prevents further lowering if an obstacle is encountered. This promotes safe operation and minimizes truck damage.
- Polyurethane tyres minimize pressure applied on the floor surface and promote more stable load handling.

LOW COST OF OWNERSHIP

- Extensive range of range of lifting heights optimizes warehouse space.
- AC drive motor on K1.0L, K1.0H and K1.0M provides superior performance and productivity.
- Progressive speed control helps optimize efficient energy consumption.
- Parts commonality with other Hyster warehouse models reduces the level of parts required to be held in stock. Familiarity with key components reduces service costs.
- Service intervals of 12 months or 1 000 hours.

PRODUCTIVITY

- A choice of three performance settings allows the truck to be configured to suit the requirements of the driver and the application.
- Automatic braking on cornering improves controllability.
- Variable lift speeds allow the truck's hydraulic performance to be matched to the dimensions and weight of the load.
- The MOSFET high frequency controller provides good traction and hydraulic control for smooth acceleration and lift performance with optimum energy efficiency.
- Compact chassis design enhances manoeuvrability.

ERGONOMICS

- Spacious compartment allows the operator more freedom of movement, leading to more comfortable operation.
- A low step height allows easy on/off access, reducing operator fatigue during stop and go operations.
- Full platform sensing for operator presence.
- Electronic fly-by-wire, effortless power steering.
- The forks can be raised or lowered independently from the cab, according to the required operator working heights, thus minimizing the need for the operator to stretch (not applicable to WP models).
- Rising cab with proportional lowering (not applicable to FC models).
- Supplementary lift and walk-on pallet cage also available.
- Front, side and overhead guards are available for operator protection (depending on model).
- Easy access to pick faces.

SERVICEABILITY

- Fixed vertically mounted motor provides easy maintenance access.
- AC drive motor is virtually maintenance free.
- CANbus wiring system enhances communication between truck systems and simplifies maintenance.
- Dashboard display provides full information on the truck performance and operating status.
- Universal support bracket.



Hyster Pacific
1/23 Rowood Road, Prospect NSW 2148
Tel: +61 (2) 9795 3800

Hyster Asia
2 Venture Drive, #23-28, Vision Exchange, Singapore 608526
Tel: +65 6863 3387

Visit us online at www.hyster.com

©2025 Hyster-Yale Materials Handling, Inc. all rights reserved. Hyster and  are trademarks of Hyster-Yale Materials Handling, Inc. Specifications and details in this brochure are subject to change without prior notification. Please consult with your Hyster dealer for the most up to date information and to confirm exact capacities.