




**STRONG PARTNERS.
TOUGH TRUCKS.™**



RS45 SERIES TECHNICAL GUIDE


WWW.HYSTER.COM

TRUCK DIMENSIONS

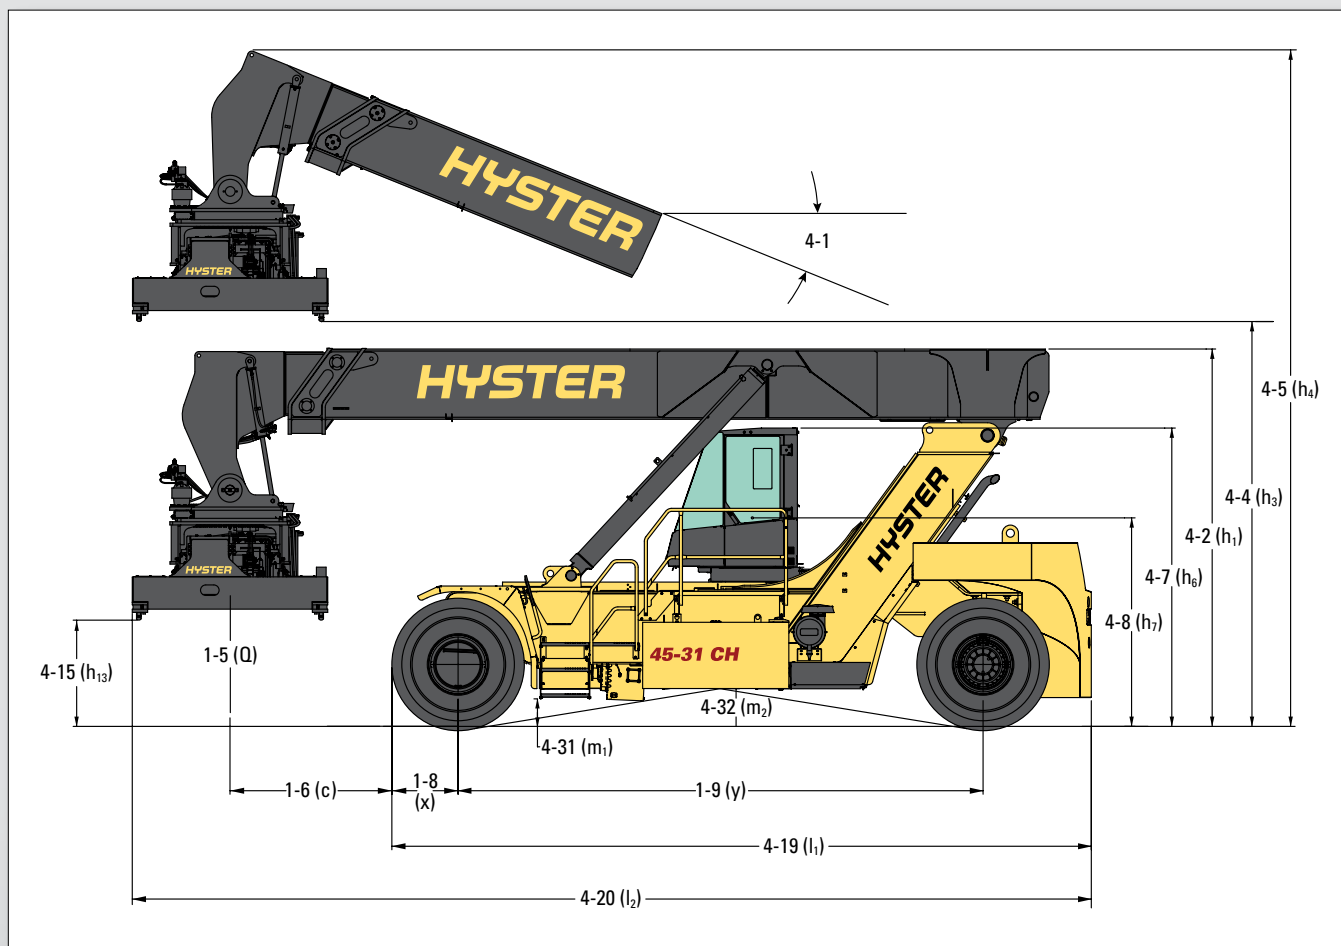




20'-0" END ON LIFTING CAPACITIES

MAXIMUM CAPACITY CONTAINER PICKING END TO END		
MODEL	20' kg	40' kg
RS45-27	31,000	12,300
RS45-31	34,000	15,000

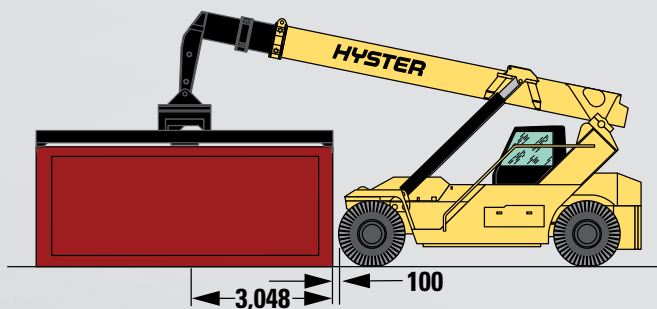

40'-0" END ON LIFTING CAPACITIES

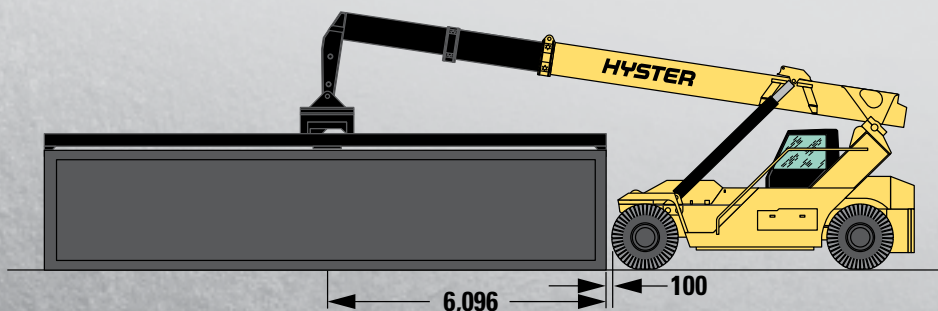

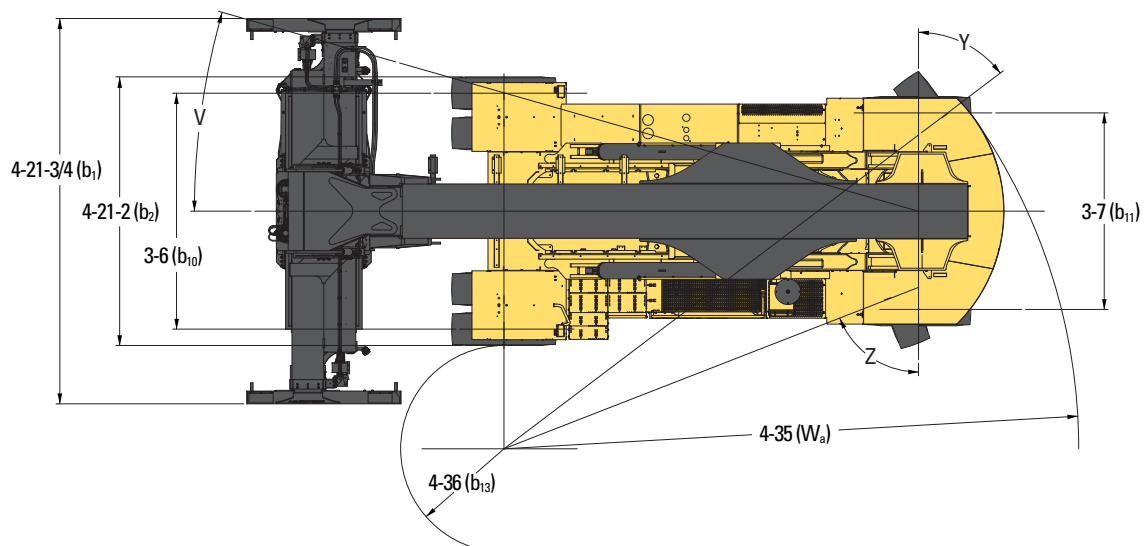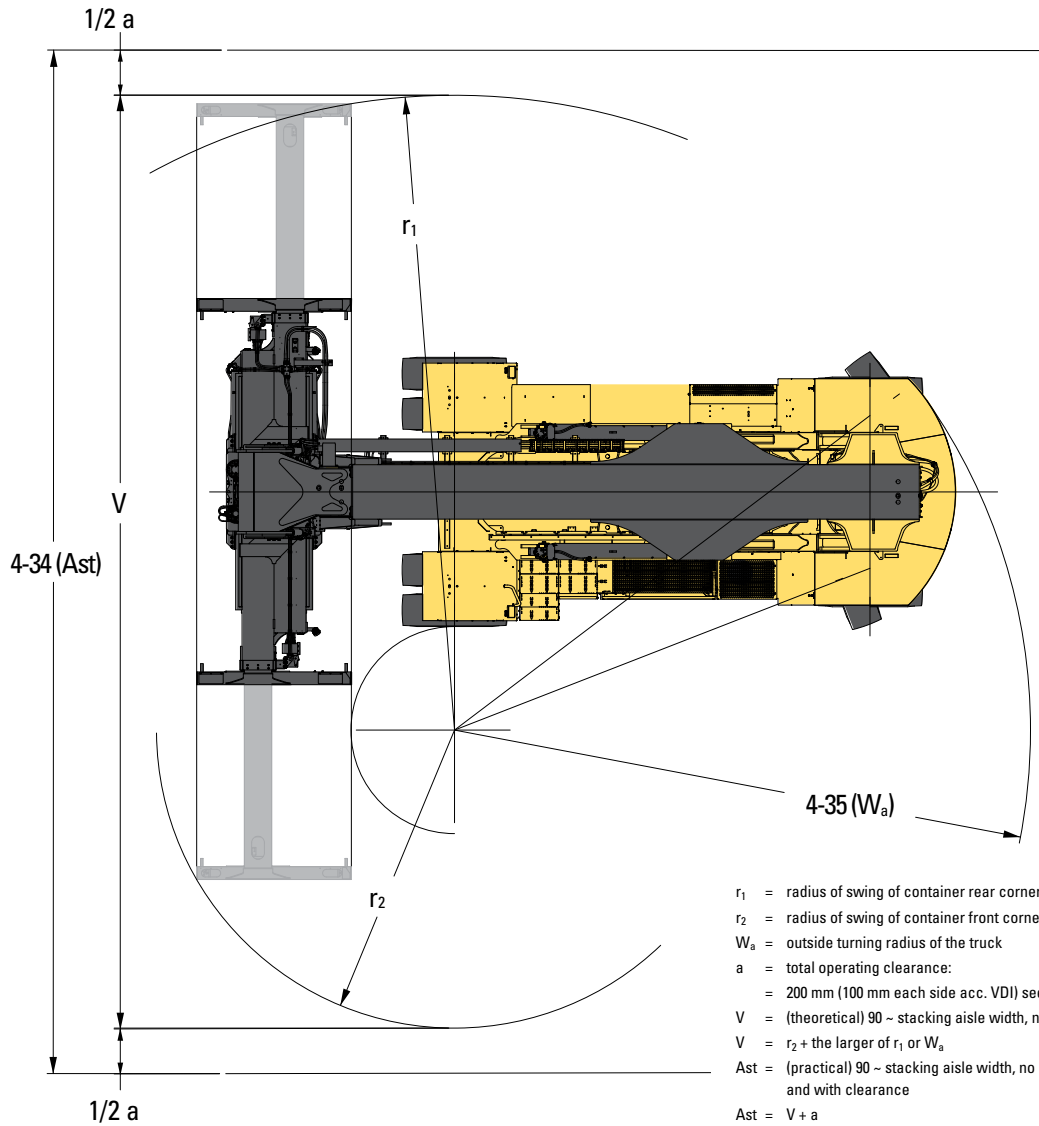

RS 45-27, RS 45-31 CONTAINER HANDLERS

GENERAL	1-1	Manufacturer			HYSTER		HYSTER	
	1-2	Model designation			RS45-27CH		RS45-31CH	
	1-3	Powertrain / drivetrain			Diesel		Diesel	
	1-4	Operator type			Seated		Seated	
	1-5-1	Load capacity at load center distance c_1	Q_1	kg	45,000		45,000	
	1-5-2	Load capacity at load center distance c_2	Q_2	kg	27,000		31,000	
	1-5-3	Load capacity at load center distance c_3	Q_3	kg	12,300		15,000	
	1-6-1	Load center distance c_1 (1)	c_1	mm	1,565		1,565	
	1-6-2	Load center distance c_2 (1)	c_2	mm	3,815		3,815	
	1-6-3	Load center distance c_3 (1)	c_3	mm	6,315		6,315	
WEIGHT	1-8	Load distance	x	mm	835		835	
	1-9	Wheelbase	y	mm	6,500		6,500	
	1-10	Stacking height at first row (number x container height)		#	5 x 9' 6"		5 x 9' 6"	
	2-1	Service weight		kg	63,300		66,300	
WHEELS	2-2-1	Axle loading with load, front / rear at c_1		kg	95,957	12,343	95,765	15,535
	2-3-1	Axle loading without load, front / rear at c_1		kg	34,307	28,993	34,115	32,185
	3-1	Tire type			Pneumatic		Pneumatic	
	3-2	Tire size, front			18.00-25 40PR		18.00-25 40PR	
DIMENSIONS	3-3	Tire size, rear			18.00-25 40PR		18.00-25 40PR	
	3-5	Number of wheels, front / rear (x = driven wheels)			x4 / 2		x4 / 2	
	3-6	Tread, front	b_{10}	mm	3,703		3,703	
	3-7	Tread, rear	b_{11}	mm	3,060		3,060	
	4-1	Boom angle minimum / maximum		degrees	0 / 59		0 / 59	
	4-2	Height of boom lowered	h_1	mm	4,700		4,700	
	4-4-1	Lift height at load center c_1 (2)	$h_{3,1}$	mm	15,150		15,150	
PERFORMANCE	4-4-2	Lift height at load center c_2 (2)	$h_{3,2}$	mm	13,540		13,540	
	4-4-3	Lift height at load center c_3 (2)	$h_{3,3}$	mm	10,390		10,390	
	4-5	Height, boom extended	h_4	mm	18,110		18,110	
	4-7	Height of overhead guard (cabin)	h_6	mm	3,720		3,720	
	4-8	Seat height to SIP (3)	h_7	mm	2,555		2,555	
	4-15	Height under twistlock - lowered (2)	h_{13}	mm	1,345		1,345	
	4-19	Overall length	l_1	mm	8,660		8,660	
	4-20	Overall length including boom retracted	l_2	mm	11,875		11,875	
	4-21-2	Overall width across all of truck	b_2	mm	4,200		4,200	
	4-21-3	Overall width across spreader 20'	$b_{1,20}$	mm	6,100		6,100	
	4-21-4	Overall width across spreader 40'	$b_{1,40}$	mm	12,200		12,200	
	4-28	Reach distance	l_4	mm	4,310		4,310	
	4-31	Ground clearance, lowest point	m_1	mm	285		285	
	4-32	Ground clearance, center or wheelbase	m_2	mm	437		437	
	4-34-3-4	Aisle width: 20' container, reduced / full stroke (4)	Ast 20	mm	12,520	11,950	12,520	11,950
	4-34-4-4	Aisle width: 40' container, reduced / full stroke (4)	Ast 40	mm	14,040	13,830	14,040	13,830
	4-35	Outside turning radius, reduced / full stroke	W_a	mm	8,990	8,450	8,990	8,450
	4-36	Internal turning radius, reduced / full stroke	b_{13}	mm	1,620	1,040	1,620	1,040
PERFORMANCE	5-1	Travel speed with / without load		km/h	20	23	20	23
	5-2	Lifting speed with / without load		m/s	0.24	0.41	0.24	0.41
	5-3	Lowering speed with / without load		m/s	0.45	0.45	0.45	0.45
	5-4-1	Telescoping speed 20' - 40'		sec	9		9	
	5-5	Drawbar pull - 1 mph (1.6 km/h) with / without load		kN	312	320	309	317
	5-7	Gradeability - 1 mph (1.6 km/h) with / without load (5)		%	27	31	27	29

GENERAL	1-1	Manufacturer			HYSTER
	1-2	Model designation			RS45-27/31CH
	1-3	Powertrain / drivetrain			Diesel

ENGINE	7-1	Engine manufacturer / model			Cummins / QSL9 227
	7-1a	EPA / CE Tier compliance			Tier 3 / Stage IIIA
	7-2	Engine power output according to ISO 1585		kW	227
	7-2-1	Engine power output - peak		kW	247
	7-3	Rated speed		rpm	2,000
	7-3-1	Engine torque @rpm (1/min)		N-m	1,424 @ 1500
	7-4	Number of cylinders / displacement		# / cm3	6 / 8900
		Turbocharger			Wastegate, air cooled
	7-8	Alternator output		Amps	120
	7-10	Battery voltage, rated capacity		V / Ah	24 / 160

DRIVE	8-1	Drive control / transmission		Type / #	Hydrodynamic Transmission
	8-2	Transmission manufacturer / type		Type / #	Spicer Off-Highway / TE-27
	8-4	Transmission speeds forward / backward		#	4 / 4
	8-5	Coupling		Type	Torque Converter
	8-6	Wheel drive / drive axle manufacturer / type		Type / #	AxleTech / PRC7545
	8-11	Service brake		Type	Oil immersed (wet) disc
	8-12	Parking brake		Type	Spring applied, dry disc on drive axle

SPREADER	9-1	Spreader manufacturer / type		Type / #	Elme / 817
	9-1-1	Pile slope, mechanical without PPS		degrees	3
	9-1-3	Pile slope, total with PPS		degrees	6
	9-3	Size of containers		ft	ISO 20' - 40'
	9-4	Side shift	b ₈	mm	+800 / -800
	9-6-1	Rotation angle, without override		degrees	n/a
	9-6-2	Rotation angle, with override		degrees	+185 / -95

MISC	10-3	Hydraulic tank capacity		l	625
	10-4	Fuel tank capacity		l	830
	10-5	Steering design			Hydrostatic
	10-7	Sound pressure level at driver's seat	L _{paz}	dB(A)	78
	10-7-1	Sound power level during the work cycle	L _{waz}	dB(A)	109

NOTES:


Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster® truck.

- (1) From face of front tires
- (2) With Mechanical Pile Slope (MPS). For optional Powered Pile Slope (PPS) function: deduct 310 mm
- (3) Full suspension seat in depressed position
- (4) Spreader at 8.0 m high, central above front axle; container 0mm in front of tires; includes 2 x 100 mm clearance; full/reduced stroke steer cylinder
- (5) Gradeability figures are provided for comparison of tractive performance, but are not intended to endorse the operation of vehicle on the stated inclines.

All capacities are according to EN1459.

All specifications and capacities are valid for trucks equipped with a Hyster® container handling spreader for handling ISO containers.

Specification data is based on VDI 2198.

 **Safety:** This truck conforms to the current EU requirements.

NOTICE:

Care must be exercised when handling elevated loads. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice.


Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

CERTIFICATION: Hyster lift trucks meet the design and construction requirements of B56.1-1969, per OSHA Section 1910.178(a)(2), and also comply with the B56.1 revision in effect at time of manufacture.


➤ RATED CAPACITIES AND STACKING HEIGHTS – CONTAINER HANDLERS

MECHANICAL PILE SLOPE

RS 45–27 CH CONTAINER SPREADER

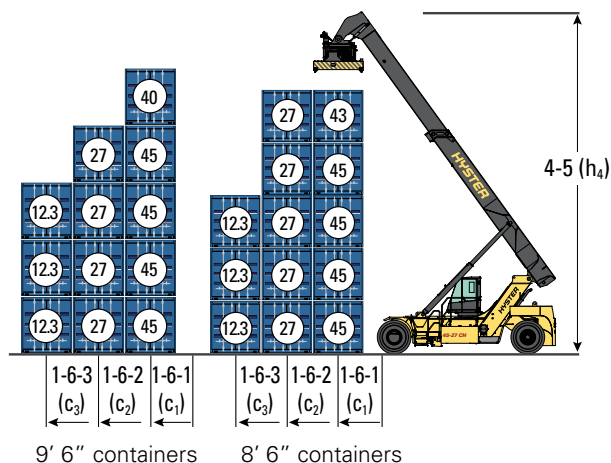


RS 45–31 CH CONTAINER SPREADER

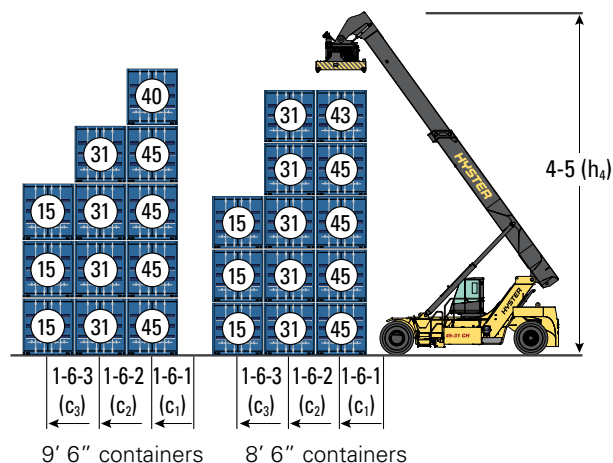


POWERED PILE SLOPE

RS 45–27 CH CONTAINER SPREADER

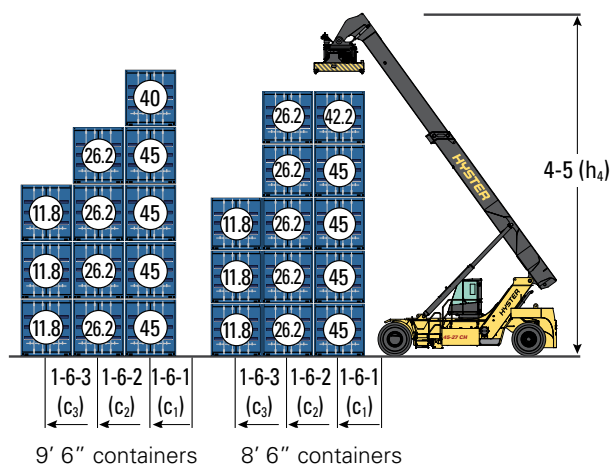

RS 45–31 CH CONTAINER SPREADER

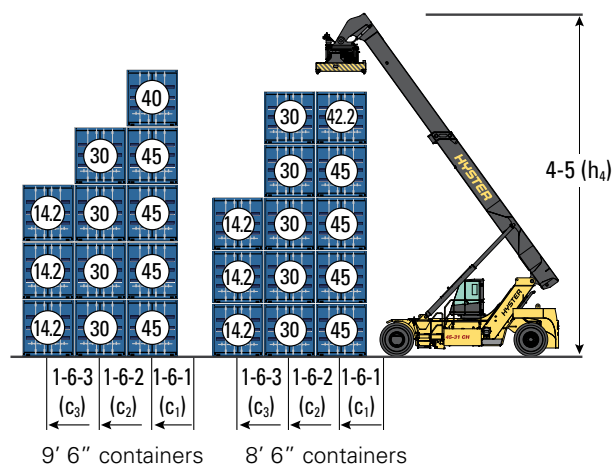

CERTIFICATION: Hyster lift trucks meet the design and construction requirements of B56.1-1969, per OSHA Section 1910.178(a)(2), and also comply with the B56.1 revision in effect at time of manufacture. Certification of compliance with the applicable ANSI standards appears on the lift truck. Performance specifications are for a truck equipped as described under Standard Equipment on this Technical Guide. Performance specifications are affected by the condition of the vehicle and how it is equipped, as well as by the nature, condition of the operating area, proper service and maintenance of the vehicle. If these specifications are critical, the proposed application should be discussed with your dealer.



PERFORMANCE	STD	OPT
Cummins QSL 9 turbo diesel engine delivering 227 kW (rated) / 247 kW (max)	X	
Tier 3 / Stage IIIA compliant	X	
Wastegate turbocharger	X	
Hibernate Idle	X	
Hydraulically driven on-demand cooling fan	X	
120 amp alternator	X	
Powertrain protection system	X	
Spicer Off-Highway TE-27 4-speed auto-shifting transmission	X	
Axletech PRC 7547 drive axle with wet disc brakes	X	
Kessler D102 drive axle with wet disc brakes		X
DRIVE	STD	OPT
Traction speed limiter when carrying container (adjustable)	X	
Traction speed limiter - unconditional (adjustable)		X
Steer axle with reduced stroke steer cylinder for longer tire life*		X
Steer axle with full stroke steer cylinder for tight turning radius*		X
E3 pneumatic drive and steer tires Continental Cranemaster 18.00 – 25.40PR	X	
E4 pneumatic drive and steer tires MRF Muscle Rok 8.00 – 25.40PR		X
E4 pneumatic drive and steer tires Continental Container Master 8.00 – 25.40PR		X
E4 pneumatic drive and steer tires Goodyear ELV-4B 8.00 – 25.40PR		X
Drive and steer Slick Tires Bridgestone 8.00 – 25.40PR		X
Drive and steer Slick Radial Tires Goodyear EV5S 18.00 R25		X
LIFT	STD	OPT
On-demand load sensing hydraulic system	X	
Automatic throttle-up when lifting (in neutral or inching)	X	
2-stage boom for 5-high 1st row stacking	X	
3B6 load moment indicator (integrated in digital operator display)	X	
High speed hoist system - when empty	X	
High speed hoist system - below 10 tons		X
Hydraulic system temperature protection		X
Container weighing system SOLAS compliant		X
HANDLING	STD	OPT
CANBus spreader, ELME model 817 with rotation	X	
Mechanical Pile Slope	X	
Powered Pile Slope		X
Powered dampening		X
4 lifting eyes located on end beam corners	X	
4 lifting eyes located under center beam of spreader		X
Container guides - located outside near twistlocks		X
Container guides - 500mm inset, heavy duty		X
Rotation stops with override		X
Automatic extend/retract		X
Stops for 30' containers		X
Vertical lift		X
VISIBILITY	STD	OPT
External wide angle mirrors mounted on rear of front fenders	X	
External wide angle mirrors mounted on top of front fenders	X	
Rear view camera system		X
Halogen work lights	X	
LED work lights		X
High performance LED work lights		X
LED twistlock indicator lights		X
LED stop/tail/brake lights	X	
Turn signals, hazard & marker lights (LED)*		X
APPEARANCE	STD	OPT
Hyster yellow paint base truck	X	
Special paint base truck		X


*Standard or optional in selected markets. Other options available through Special Products Engineering Department (SPED). Contact Hyster for details.

ERGONOMICS	STD	OPT
Powered sliding cabin (1200 mm), including additional mirrors on top of fenders	X	
Isolated mounting for low noise and vibration	X	
Coat hook	X	
Cabin emergency exit - rear hinged window	X	
Front, top and rear wipers	X	
Front and rear window defrosters	X	
Left side handrails, stairway and cabin door	X	
Right side handrails, stairway and cabin door		X
Stair lights		X
7" digital operator display	X	
Seat-side joystick hydraulic control	X	
Steering wheel spinner knob	X	
Directional control lever	X	
Interior wide angle mirrors	X	
Heater with 3-speed fan	X	
Telescoping & tilting steering column	X	
Recirculation fan	X	
DC/DC converter 24 volt/12 volt with socket*	X	
Air conditioning		X
Sun shades on top and rear		X
Radio preparation set-up (wiring, two speakers and antenna)		X
Reading light		X
Operator presence system	X	
Mechanical suspension seat	X	
Deluxe air suspension seat		X
Low backrest*		X
High backrest*		X
Cloth seat cover	X	
Vinyl seat cover		X
Seat heating		X
2-point high visibility seatbelt	X	
3-point high visibility seatbelt		X
OPERATION	STD	OPT
Electric air horn 112 dB	X	
Visible alarm – amber strobe light, key switch activated*		X
Visible alarm – amber strobe light, switch and key switch activated*		X
Audible alarm – reverse direction activated 82–102 dB(A), self-adjusting	X	
Forward motion alarm		X
Seatbelt interlock for engine start		X
Seatbelt indicator light on top of cab		X
Tire pressure monitoring system		X
Lockable battery disconnect switch	X	
NATO plug start aid		X
Adjustable automatic “empty seat” engine shutdown		X
Trainer seat		X
Non-locking fuel cap	X	
Lockable fuel cap		X
Hyster Tracker wireless asset management - monitoring*		X
Hyster Tracker wireless asset management - access / verification		X
Auto greasing system for basic truck & outer boom		X
Auto greasing system for inner boom and spreader		X
24 volt electrical system	X	
Engine block heater 110 & 220 volt		X
Steer wheel lug nut protection	X	
Engine compartment light		X
SUPPLEMENTAL	STD	OPT
Literature package	X	
Operator's manual	X	
Warranty: 12 months / 2,000 hours manufacturer's warranty	X	
CE Certification		X



Hyster Company
P.O. Box 7006
Greenville, North Carolina
27835-7006
Part No. RS45/TG
4/2017 Litho in U.S.A.

Visit us online at www.hyster.com or call us at **1-800-HYSTER-1**.

Hyster, , and STRONG PARTNERS. TOUGH TRUCKS. and MONOTROL are registered trademarks in the United States and certain other jurisdictions. Hyster products are subject to change without notice. Cummins, AxleTech, Kessler, Spicer and Elme are all registered trademarks under their respective companies.

Trucks may be shown with optional equipment. © 2017 Hyster Company. All rights reserved.