



Sit-Down, Counterbalanced IC, Cushion Tire **FORTIS**® Line

S 135-155FT Series



STRONG PARTNERS. TOUGH TRUCKS.™



S135-155FT SERIES

The S135-155FT is more than a lift truck series. It represents a transformation in how lift trucks are designed, built and acquired. Drawing on Hyster Company's legacy of strength, durability and toughness, the Fortis® concept simplifies lift truck purchases with a two-tiered system of preconfigured engine-transmission bundles. Fortis means you maximize your purchasing power by buying only the features you need for your application. Using a truck from the S135-155FT series means low cost of operations, dependability and owning a unit that's still going strong long after the day's work is done.

THE HYSTER® S135-155FT SERIES ADVANTAGE

The S135-155FT series is configured to provide the right lift truck for your application. Our truck packages with multiple powertrain combinations to choose from assure of lowering your cost of operations will be lowered. Each configuration offers improved efficiency, advanced dependability and simple serviceability.

FORTIS®		FORTIS® ADVANCE
DESIGN INTENT		
Investment	Lowest Upfront Investment	Minimized Operating Costs
POWERTRAIN CONFIGURATION		
Engine	GM 4.3L, 101 HP	GM 4.3L, 101 HP
Transmission (Speeds)	Standard electronic powershift (2F/2R)	DuraMatch™ (3F/2R)
Brakes	Oil-cooled wet disc brakes	Oil-cooled wet disc brakes
Cooling System	Combi-cooler radiator	Combi-cooler radiator
Hydraulics	Cowl mounted levers	Cowl mounted levers





Trucks shown with optional equipment.

S 135-155FT

A. Overhead Guard (OHG)

The unique grid-style pattern improves visibility while protecting operators and strengthening the truck's structure. The front, curved OHG leg design affords greater shoulder clearance for easier operator entry and exit.

B. Hydraulic Controls

The Hyster® Fortis® line of lift trucks offers two configurations that employ cowl mounted levers or TouchPoint™ mini-levers to provide you unsurpassed, low effort, tactile control of all hydraulic functions.

C. Exclusive VISTA® Mast

High strength hot-rolled steel mast channels and flush-faced design improve capacity retention at high lifts. Compact cast steel cross members optimize visibility and rigidity. Six 3-inch full-face load rollers roll on the web and the flange simultaneously, eliminating the need for side thrust rollers or wear plugs.

D. Tilt Steer Column

The infinitely adjustable tilt steer column accommodates operators easily. Assisted by a gas-spring and an easy-to-reach lever, obtaining your preferred position is simple. The standard 12-inch steering wheel with integrated spinner knob reduces fatigue while providing more knee room. And it goes lock-to-lock in just 4 turns for superior efficiency, maneuverability and control.

E. Pacesetter VSM™

The computer "brain" of the Fortis® line of lift trucks manages all vehicle systems to optimize performance and significantly increase overall reliability and enhance diagnostic capabilities for maximum uptime.

F. Hassle-Free Hydraulics

Use of leak-free O-ring face seals helps maximize uptime. In-tank filter increases hydraulic fluid filtration by 60% for particles down to 10 microns, significantly extending component life and creating a cleaner overall operation.

G. Carriage

The Fortis S135-155FT features a robust 48" Cantled roller hook carriage with excellent visibility and the strength to handle long forks or tough attachment applications.

H. Heavy-duty Drive Axle

The full floating design of the planetary drive axle lets the axle housing, not the shafts, carry the weight of the load, enhancing dependability and reliability for a longer service life.

I. Oil-Cooled Wet Disc Brakes

Provide excellent stopping power and extremely long service life. Brakes are completely sealed from water and dirt making them ready for your harshest environments.

J. Drivetrain Mounting

The Hyster Fortis line of lift trucks has a fully isolated drivetrain through the use of elastomeric mounts for the engine and transmission. The result is a new standard in smooth riding comfort.

K. Removable Floor Plate

One piece, steel floor plate is easily removed to provide incredible service access. A molded rubber floor mat seals the floor area to reduce noise and vibration for a more comfortable ride.

L. Hydrostatic Steer Axle

The elastomeric-mounted Hyster designed cast ductile iron steer axle with transverse, double-acting hydraulic cylinder, tapered roller spindle- support bearings and non-adjustable tie rods provide maximum durability and superior steering control for easy maneuvering and low maintenance.

M. Counterweight

The superior design permits a significant increase in airflow to assist the Fortis line of lift trucks to run cooler, even in extreme temperatures and environments.

N. Engine Cover

The tough engine cover is made of a durable, crack-resistant, thermoset polyester resin reinforced with glass. Hinged at the rear, it offers superior service access to the engine compartment with an opening angle of 85 degrees.

O. EZXchange™ Bracket

This optional bracket swings out from over the top of the counterweight and the gas-spring assisted fuel cylinder lowers into a reclined and locked position, providing a stable platform for quick, easy LP tank replacement.

P. Brake/Backup Lights

For superior functionality, the optional Hyster LED brake/backup lights resist vibration and offer extremely long life.

Q. Fatigue-Reducing Operator Compartment

Ergonomically designed compartment plays a big role to enhance overall productivity. Entry and exit are made easy by the optimized step height with non-slip step tread, soft touch contoured hand grip and rounded hood. Repositioned foot pedals provide improved floor space, while better engine cooling keeps operators more comfortable. Infinitely adjustable tilt steer column accommodates any size operator. A formed fiberglass liner provides increased noise suppression for a more comfortable ride.

Decrease Downtime By Up To 30%

Approximately 70% of industrial lift truck downtime results from problems with the powertrain, brakes, electrical system, cooling system or hydraulic system. With the S135-155FT, many of these mechanical issues become a thing of the past as design advances have reduced downtime by up to 30%.

Toughest Powertrain

- Pacesetter VSM™ industrial onboard computer monitors and protects the engine powertrain to maximize the S135-155FT series uptime.
- Transmission gears and shafts are up to 15% stronger to handle even the most demanding duty cycle.
- Electronically controlled powershift transmissions have state-of-the-art clutch packs that are stronger and larger and provide up to 3 times the life.
- Hyster® tough brakes are self-adjusting and self-energizing to provide optimal performance and lengthened service life.

Industrial Strength Electronics

- CANbus communications network reduces wiring complexity, providing superior dependability.
- Non-mechanical, Hall-Effect sensors and switches are designed to outlast the life of the truck.
- Proven tough, Pacesetter VSM industrial onboard computer manages truck operation to maintain world-class dependability to maximize uptime.
- IP66 sealed electrical connectors keep out water and debris, so you can powerwash our trucks.
- Smart, one-way routing path for wire harnesses ensures consistent high-quality assembly while increasing durability and simplifying maintenance when needed.



Exceptional Cooling

- Standard Combi-cooler radiator provides 4-row aluminum core for additional transmission oil cooling capacity for the most demanding and intensive applications.
- Soft rubber isolator mounted radiators increase reliability and durability to significantly extend service life.
- A superior counterweight tunnel design coupled with a “pusher” type fan and enhanced shroud design improves airflow and significantly reduces the recirculation of hot air to maximize cooling capabilities.

Hassle-Free Hydraulics

- Leak-free O-ring face seal fittings reduce leaks for enhanced reliability.
- A 10-micron high-performance in-tank filtration system captures 99.5% of hydraulic system debris, significantly extending component life.
- Smart placement of the control valve and hydraulic lines away from heat sources reduces operating temperature, extending the life of seals and hoses for unbeatable reliability.



Save over \$2,464 In Operating Costs Per Lift Truck – Each Year

Lowering operating costs in all types of applications is what the Hyster® S135-155FT Fortis® series does best. With up to a 30% decrease in downtime, the Hyster S135-155FT Fortis series is an exceptionally smart choice. The S135-155FT series features 2 truck packages with multiple powertrain configurations that provide improved efficiency, while enhancing reliability and superior serviceability to reduce your operating costs.

World-Class Efficiency

- Auto Deceleration System extends brake life by up to 60% by automatically slowing the truck when the accelerator pedal is released. (Fortis® Advance)
- Controlled power reversal feature virtually eliminates tire spin, increasing tire life by up to 50%. This feature is programmable to match the needs from delicate to more aggressive settings for maximum productivity. (Fortis Advance)
- Electronic hydraulic control valve precisely manages hydraulic pressure and flow to supply exactly the right amount of power for each function, reducing fuel consumption.
- Kubota Turbo Diesel engine features 500 hour service intervals.
- Hydraulic oil change interval extended from 2,000 to 4,000 hours.
- Improved engine options provide excellent performance with advanced combustion technology that enhances fuel economy.

Advanced Dependability

- **Toughest Powertrain:** Electronic controlled transmissions reduce shock loading; clutch packs with 3 times the life; 15% stronger gears and shafts; and Hyster oil-cooled wet disc brakes all work to provide unmatched reliability.
- **Industrial Strength Electronics:** CANbus communications, non-mechanical sensors and switches and IP66 rated sealed connections mean electrical problems are a thing of the past.
- **Industry's Best Cooling:** The S135-155FT series' superior airflow and heavy-duty cooling systems keep heat in check, while providing world-class dependability in even the harshest of environments.
- **Hassle-free Hydraulics:** Leak-free O-ring face seal fittings at all high pressure connection points, superior filtration (10 micron) system and smart placement of valve and lines take the worry out of hydraulics.



Superior Serviceability

- Pacesetter VSM™ continuously monitors fluid levels and powertrain, reducing daily service checks and preventing major repairs.
- Unmatched service access: Rear-opening one-piece hood (opens up 85 degrees) and easy-to-remove one-piece floor plate (no tools required) provide industry's best cowl to counterweight service access.
- Daily checks are easily accessed and performed.
- State-of-the-art onboard diagnostics reduce repair time and minimize expensive parts swapping.
- Standard oil-cooled wet disc brakes virtually eliminate brake maintenance.

DOWNTIME IS COSTLY

Estimated Costs per Downtime Event:	
Repair Costs (parts & labor)	\$ 500
Idle Operator Costs	+ \$ 60
Truck Rental Costs	+ \$ 120
Administrative Costs	+ \$ 50
TOTAL COST (per Downtime Event)	\$ 730
Additional Costs:	+ \$
Lost Productivity and Sales	\$???

Assumptions:

1. Operator Cost = \$15.00/hr.

2. Average Length of Downtime Event = 4 hrs.

Superior Operator Comfort

- Low noise level at the operator's ear lessens driver fatigue, improving driver satisfaction for an overall increase in productivity.
- Isolated drivetrain minimizes the effect of powertrain vibration and road-born shocks to increase operator comfort all shift long.
- Rear drive handle mounted on overhead guard leg (optional) provides an excellent hand hold for reverse driving while giving ready access to the auxiliary horn button for use when approaching cross-aisles and pedestrian traffic areas.
- An infinitely adjustable steer column and optional full suspension swivel seat assures the right fit for any operator.
- Easy-to-use 3-point entry design of operator compartment uses a large molded hand grip and open non-slip step with a low step height to minimize muscle/joint strain during entry/exit.
- Adjustable armrest that accompanies the optional TouchPoint™ E-hydraulic control moves with the seat and telescopes forward/vertical in one simple movement to provide greater flexibility in achieving a more custom position.
- A swingout bracket frees the LP tank from over the counterweight to simplify changeout.
- Optional EZXchange™ bracket also lowers the tank on its stable platform to minimize arm and back strain for even easier changeouts.
- Choice of 5 different seats enables a more customizable level of operator comfort by its enhanced design and adjustable features.



Precise, Effortless Operation

- Improved brake pedal layout and the reduced braking requirements of the Auto Deceleration System significantly reduce operator fatigue. (Fortis® Advance)
- 12-inch steering wheel with spinner knob improves steering response, increasing control and efficiency while minimizing shoulder strain with only 4 turns lock-to-lock.
- Controlled rollback on ramps contributes to lower driver fatigue and significantly enhances truck and load control on ramps. (Fortis Advance)

Performance At-A-Glance

- Advanced dash display uses a non-reflective, backlit LCD screen and 21 indicator lights provide performance at-a-glance in all lighting conditions.
- Easy-to-use onboard diagnostics through the advanced dash display provide fast and accurate troubleshooting for first-time fixes.
- Optional premium monitoring package reports air and hydraulic oil filter restrictions and low engine coolant levels.



Increase Throughput and Sales Volume While Reducing Operating Costs

Productivity means moving more of your loads in less time with less cost. The Hyster® Fortis® series has been proven to lead the industry in productivity through performance, ergonomics (operator comfort and control), service, uptime and dependability.

Performance Customized For Your Application

- S135-155FT series choice of high output engines, performance transmissions, hydraulic controls and cooling system options allows you to customize your truck to optimize the productivity in your application.
- Both engine choices provide enhanced fuel efficiency so you can get more loads moved on a single tank.
- Pacesetter VSM™ industrial onboard computer enables you to adjust and optimize the performance of your S135-155FT trucks.
- Patented DuraMatch™ transmission provides breakthrough features that include the Auto Deceleration System, controlled rollback on ramps, controlled power reversals to move loads more efficiently with less operator fatigue and product damage.
- With the exceptional cooling and its ability for extended draw bar pull, the S135-155FT series will continue to perform when other lift trucks may fail.

ESTIMATED ANNUAL LIFT TRUCK OPERATOR COSTS	
Costs Related To Fatigue	Average Annual Cost Per Lift Truck Operator
Absenteeism ¹ Turnover ² Lift Truck and Property Damage ³ Workers Compensation ⁴ Productivity/Lost Sales	\$6,862
Potential Savings Level	Average Annual SAVINGS Per Lift Truck Operator
Savings at 10% - 20%	\$686 - \$1,372

¹ Absentee cost based on national average as published in Facility Management safety study, 2003.

² Average turnover cost according to U.S. Dept. of Labor 2002, 30% of income at \$15/hour for 2,000 hours per year.

³ Lift Truck and Property Damage based on data from NMHG Fleet Services.

⁴ Workers Compensation costs are average costs for high and low fatigue environments according to 2004 Shiftwork Practices Survey.



Superior Operator Control

- Superior ergonomic features like more foot and leg room, 2 choices of hydraulic controls, infinitely adjustable steer column, integrated dashboard display, 12-inch steering wheel with spinner knob, Auto Deceleration System, EZXchange™ tank bracket (optional), 5 choices of seats and the rear drive handle enable your operator to maximize productivity.

Superior Serviceability

- Complete cowl-to-counterweight access, daily service checks easily located and accessed, the integral dashboard display's onboard diagnostic capabilities and reduced service requirements significantly minimize service times to maximize uptime.

Performance Plus+

The Fortis® line of lift trucks represents a breakthrough in how Hyster® lift trucks are being designed, built and acquired. But even the toughest, most durable machine with moving parts will need service at some point. As your strong partners, we are committed to delivering extraordinary aftermarket support to the S135-155FT series that includes a parts availability program which is the fastest and most comprehensive in the industry today – to keep your materials moving at the speed of business today and tomorrow.

Objective:

- To provide world-class product support unparalleled in the industry.

Performance Plus™ Parts Guarantee:

- Off-the-shelf availability guarantee on the parts commonly required in the first two years of use.
- Simply stated, if “Performance Parts” are not available from your local Authorized Hyster Dealer within 1 business day from the date of order – they are free.*
- Please contact your local Hyster Dealer for the details.

Industry's Best Warranty:

- One year/2,000 hours on full truck.
- Three years/6,000 hours on powertrain.



Best In Class Serviceability:


- Designed to be one of the fastest and easiest lift trucks to service.
- State-of-the-art on-board and PC-based diagnostics available.
- Significantly reduced regular service requirements.

Most Experienced Dealer Network:

- Over 230 dealer locations in North America.
- Dealers average over 30 years of materials handling experience.
- Over 2,500 trained service technicians.
- Rental fleet of over 14,000 lift trucks.

**Contiguous 48 states of the U.S.A. only*




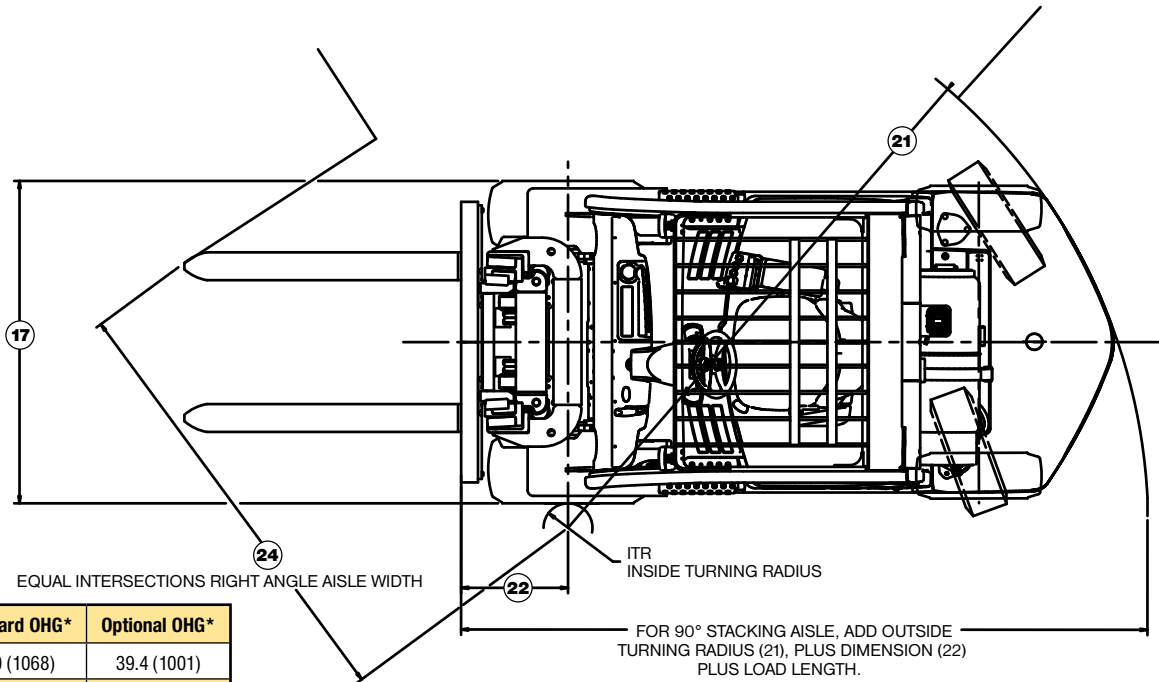

Seat Type	Standard OHG*	Optional OHG*
Non-Suspension	42.0 (1068)	39.4 (1001)
Full-Suspension	41.8 (1062)	N/A
Swivel Full-Suspension	42.0 (1068)	N/A

Seat in depressed position*

TRUCK MODEL	C	D	E	T	X
	in. (mm)	percent	percent	in. (mm)	in. (mm)
S135-155FT	23.6 (600)	42%	46%	6.9 (177)	33.2 (844)

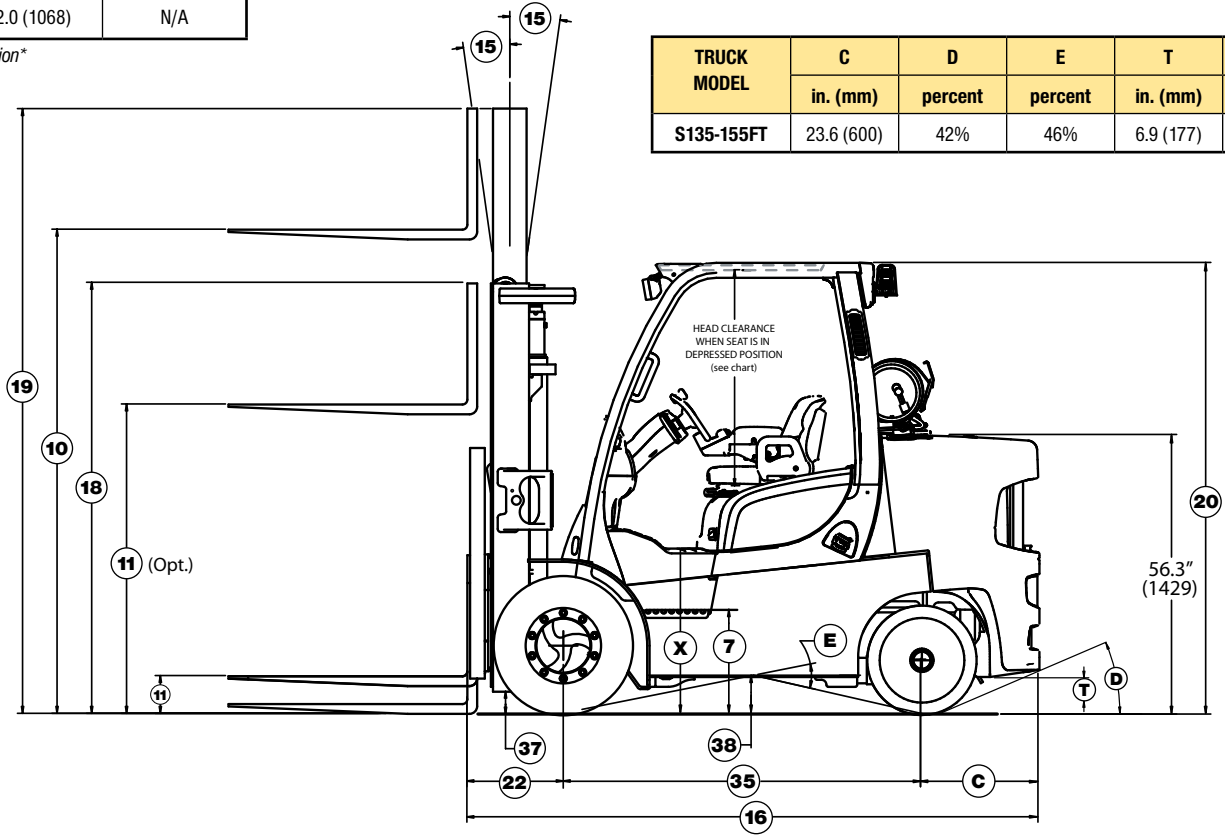

Circled dimensions correspond to the line numbers on the tabulated chart inside the Technical Guide. Dimensions are in inches (millimeters).

S135FT SPECIFICATIONS

GENERAL	1	Manufacturer Name		Hyster Company		
	2	Model		S135FT		
		Transmission Type		Electronic Powershift		
	2a	Power Train - Engine Transmission		GM 4.3L	GM 4.3L	Kubota 3.8L
	3	Load capacity	lbs/kg	13,500 (6,000)		
	4	Load center	in./mm	24 (610)		
	5	Drive Power Type: Gas, Diesel, LPG		Gasoline	LPG	Diesel
	6	Operation: Seated rider		Seated Rider		
	7	Step Height	in (mm)	20.9 (531)		
	8	Tires		Cushion		
DIMENSIONS	9	Number of wheels, front/rear (X = driven)		2X/2		
	9a	Track width, front	in (mm)	44.6 (1133)		
	9b	Track width, rear	in (mm)	46.9 (1192)		
	10	Lift height (TOF)	in (mm)	133 (3400)		
	11	Standard Free lift height	in (mm)	6 (160)		
	11a	Optional Free lift w/LBR (TOF)	in (mm)	50 (1295)		
	11b	Optional Free lift w/o LBR (TOF)	in (mm)	56 (1425)		
	12	Fork carriage width - Standard Carriage	in (mm)	48 (1219)		
	13	Fork dimensions	in (mm)	6 X 2.5 X 48 (150 X 60 X 1219)		
	13a	Fork Spacing - Std Carriage - Minimum inside to inside edge	in (mm)	6.3 (160)		
	14	Fork Spacing - Std Carriage - Maximum outside to outside edge	in (mm)	43.7 (1109)		
	15	Mast tilt, forward/back	degrees	6 F/10 B		
	16	Overall length (length to face of forks)	in (mm)	115.3 (2930)		
	17	Overall width	in (mm)	56.6 (1438)		
	18	Height of Standard mast, lowered	in (mm)	107 (2697)		
	19	Height of mast, extended w/o load backrest	in (mm)	181 (4575)		
	19a	Height of mast, extended w/load backrest	in (mm)	183 (4632)		
	20	Height to top of Std. overhead guard (high)	in (mm)	91 (2302)		
	20a	Height to top of overhead guard (low)	in (mm)	88 (2235)		
	20b	Towing coupling height	in (mm)	15.3 (388)		
	21	Outer turning radius	in (mm)	101.8 (2585)		
	21a	Inner turning radius	in (mm)	4.3 (108)		
	22	Load distance (load face-ctr of wheel to face of forks-front overhang) 2-stg mast	in (mm)	19.6 (498)		
	22a	Load distance (load face-ctr of wheel to face of forks-front overhang) 3-stg mast	in (mm)	21.0 (534)		
	23	Right angle stack (with pallet W=42in, L=48in)	in (mm)	169.4 (4302)		
	23a	Right angle stack (add length of load)	in (mm)	121.4 (3083)		
	24	90° intersecting aisle (with pallet W=42in, L=48in)	in (mm)	91.2 (2317)		
PERFORMANCE	25	Travel speed	laden/unladen mph (km/hr)	12.5/12.0 (20.1/19.4)	12.5/12.0 (20.1/19.4)	12.9/12.4 (20.7/20.0)
	26	Lifting speed (2LFL)	laden/unladen ft/min (m/sec)	104/106 (.53/.54)	104/106 (.53/.54)	94/96 (.48/.49)
	26a	Lifting speed (3FFL)	laden/unladen ft/min (m/sec)	100/102 (.51/.52)	100/102 (.51/.52)	93/93 (.47/.47)
	27	Lowering speed (2LFL)	laden/unladen ft/min (m/sec)	114/104 (.58/.53)	114/104 (.58/.53)	114/104 (.58/.53)
	27a	Lowering speed (3FFL)	laden/unladen ft/min (m/sec)	104/81 (.53/.41)	104/81 (.53/.41)	104/81 (.53/.41)
	28	Maximum drawbar pull	laden/unladen lbs (kg)	10314/4771 (4678/2164)	10548/4800 (4784/2177)	11104/4821 (5037/2187)
	28a	Drawbar pull @ 1.0 mph or 1.6 km/h	laden/unladen lbs (kg)	8431/4771 (3824/2164)	8641/4800 (3919/2177)	8525/4821 (3867/2187)
	28b	Drawbar pull @ 3.0 mph or 4.8 km/h	laden/unladen lbs (kg)	5275/4771 (2393/2164)	5479/4800 (2485/2177)	5044/4821 (2283/2187)
	29	Gradeability max	laden/unladen %	32.6/24.8	33.3/24.8	35.0/24.8
	29a	Gradeability @ 1.0 mph or 1.6 km/h	laden/unladen %	26.2/24.8	26.8/24.8	26.3/24.8
WT.	29b	Gradeability @ 3.0 mph or 4.8 km/h	laden/unladen %	16.0/24.8	16.6/24.8	15.2/24.8
	31	Unladen weight (w/std equipment: mast, carriage, forks, etc.)	lbs (kg)	18890 (8568)	18960 (8600)	19000 (8618)
	32	Axle loading laden (w/std option configuration)	front/rear lbs (kg)	29410/2980 (13340/1352)	29410/3050 (13340/1383)	29460/3040 (13363/1379)
WHEELS & TIRES	32a	Axle loading unladen (w/std option configuration)	front/rear lbs (kg)	7720/11170 (3502/5067)	7720/11240 (3502/5098)	7700/11230 (3524/5094)
	33	Tire size - front		28 X 12 X 22		
	34	Tire size - rear		22 X 12 X 16		
	35	Wheelbase	in (mm)	72.0 (1830)		
	37	Ground clearance under mast, laden	in (mm)	4.1 (104)		
	38	Ground clearance at center of wheelbase	in (mm)	7.4 (188)		
	39	Brakes Service - Method of Control/Operation		Hydraulic/Foot		
TRANS. & POWER UNIT	40	Brakes Park - Method of Control/Operation		Mechanical/Hand		
	41	Battery Type		Maintenance Free		
	42	Battery Volts/Cold Cranking Amps		12V/475	12V/475	12V/900
	43	Engine manufacturer/type		GM Gasoline	GM LPG	Kubota Turbo Diesel
	44	Engine output, in accordance with ISO1585	hp (KW)	98 (73) @ 2400 RPM	101 (75) @ 2400 RPM	74 (55) @ 2200 RPM
	45	Torque	ft-lb (N-m)	215 (290) @ 2400 RPM	220 (300) @ 2400 RPM	227 (309) @ 1400 RPM
	46	Number of cylinders/displacement	No./cc (ci)	V6/4302 (262)	V6/4302 (262)	4/3769 (230)
	47	Gear change type		Electronically Controlled Powershift		
	47a	Transmission: Number of speeds forward/reverse		2F/2R		
	48	Fuel Tank - Capacity (Gasoline- or Diesel-Powered Units Only)	gal (liters)	18.5 (70)		
	49	Working pressure for attachments	psi (bar)	2250 (153)		
	50	Hydraulic Tank - capacity (drain & refill)	gal (liters)	16.3 (61.8)		

CERTIFICATION: These Hyster lift trucks meet design specifications of Part II ANSI B56.1-1969, as required by OSHA Section 1910.178(a)(2) and also comply with Part III ANSI B56.1-revision in effect at time of manufacture. Certification of compliance with the applicable ANSI standards appears on the lift truck.

† NOTE: Performance specifications / ratings are for truck equipped as described under Standard Equipment in this Technical Guide. Performance specifications are affected by the condition of the vehicle and how it is equipped, as well as by the nature and condition of the operating area. Specifications are subject to change and the proposed application should be discussed with your authorized Hyster Company Dealer.

†† Limited by traction. For further information on this dimension, please contact your local Hyster dealer.

S135FT SPECIFICATIONS

13

GENERAL	1	Manufacturer Name		Hyster Company		
	2	Model		S135FT		
		Transmission Type		DuraMatch™		
	2a	Power Train - Engine Transmission		GM 4.3L	GM 4.3L	Kubota 3.8L
	3	Load capacity	lbs/kg	13,500 (6,000)		
	4	Load center	in./mm	24 (610)		
	5	Drive Power Type: Gas, Diesel, LPG		Gasoline	LPG	Diesel
	6	Operation: Seated rider		Seated Rider		
	7	Step Height	in (mm)	20.9 (531)		
	8	Tires		Cushion		
DIMENSIONS	9	Number of wheels, front/rear (X = driven)		2X/2		
	9a	Track width, front	in (mm)	44.6 (1133)		
	9b	Track width, rear	in (mm)	46.9 (1192)		
	10	Lift height (TOF)	in (mm)	133 (3400)		
	11	Standard Free lift height	in (mm)	6 (160)		
	11a	Optional Free lift w/LBR (TOF)	in (mm)	50 (1295)		
	11b	Optional Free lift w/o LBR (TOF)	in (mm)	56 (1425)		
	12	Fork carriage width Standard Carriage	in (mm)	48 (1219)		
	13	Fork dimensions	in (mm)	6 X 2.5 X 48 (150 X 60 X 1219)		
	13a	Fork Spacing - Std Carriage - Minimum inside to inside edge	in (mm)	6.3 (160)		
	14	Fork Spacing - Std Carriage - Maximum outside to outside edge	in (mm)	43.7 (1109)		
	15	Mast tilt, forward/back	degrees	6 F/10 B		
	16	Overall length (length to face of forks)	in (mm)	115.3 (2930)		
	17	Overall width	in (mm)	56.6 (1438)		
	18	Height of Standard mast, lowered	in (mm)	107 (2697)		
	19	Height of mast, extended w/o load backrest	in (mm)	181 (4575)		
	19a	Height of mast, extended w/load backrest	in (mm)	183 (4632)		
	20	Height to top of Std. overhead guard (high)	in (mm)	91 (2302)		
	20a	Height to top of overhead guard (low)	in (mm)	88 (2235)		
	20b	Towing coupling height	in (mm)	15.3 (388)		
	21	Outer turning radius	in (mm)	101.8 (2585)		
	21a	Inner turning radius	in (mm)	4.3 (108)		
	22	Load distance (load face-ctr of wheel to face of forks-front overhang) 2-stg mast	in (mm)	19.6 (498)		
	22a	Load distance (load face-ctr of wheel to face of forks-front overhang) 3-stg mast	in (mm)	21.0 (534)		
	23	Right angle stack (with pallet W=42in, L=48in)	in (mm)	169.4 (4302)		
	23a	Right angle stack (add length of load)	in (mm)	121.4 (3083)		
	24	90° intersecting aisle (with pallet W=42in, L=48in)	in (mm)	91.2 (2317)		
PERFORMANCE	25	Travel speed	laden/unladen mph (km/hr)	13.0/12.5 (20.8/20.1)	13.0/12.5 (20.8/20.1)	13.0/12.6 (20.9/20.2)
	26	Lifting speed (2LFL)	laden/unladen ft/min (m/sec)	104/106 (.53/.54)	104/106 (.53/.54)	94/96 (.48/.49)
	26a	Lifting speed (3FFL)	laden/unladen ft/min (m/sec)	100/102 (.51/.52)	100/102 (.51/.52)	93/93 (.47/.47)
	27	Lowering speed (2LFL)	laden/unladen ft/min (m/sec)	114/104 (.58/.53)	114/104 (.58/.53)	114/104 (.58/.53)
	27a	Lowering speed (3FFL)	laden/unladen ft/min (m/sec)	104/81 (.53/.41)	104/81 (.53/.41)	104/81 (.53/.41)
	28	Maximum drawbar pull	laden/unladen lbs (kg)	10000/4771 (4536/2164)	10000/4800 (4536/2177)	10000/4821 (4536/2187)
	28a	Drawbar pull @ 1.0 mph or 1.6 km/h	laden/unladen lbs (kg)	10000/4771 (4536/2164)	10000/4800 (4536/2177)	10000/4821 (4536/2187)
	28b	Drawbar pull @ 3.0 mph or 4.8 km/h	laden/unladen lbs (kg)	6306/4771 (2860/2164)	6601/4800 (2994/2177)	5145/4821 (2334/2187)
	29	Gradeability max	laden/unladen %	31.5/24.8	31.5/24.8	31.5/24.8
	29a	Gradeability @ 1.0 mph or 1.6 km/h	laden/unladen %	31.5/24.8	31.5/24.8	31.5/24.8
WT.	29b	Gradeability @ 3.0 mph or 4.8 km/h	laden/unladen %	19.6/24.8	20.2/24.8	15.5/24.8
	31	Unladen weight (w/std equipment: mast, carriage, forks, etc.)	lbs (kg)	18890 (8568)	18960 (8600)	19000 (8618)
	32	Axle loading laden (w/std option configuration)	front/rear lbs (kg)	29410/2980 (13340/1352)	29410/3050 (13340/1383)	29460/3040 (13363/1379)
	32a	Axle loading unladen (w/std option configuration)	front/rear lbs (kg)	7720/11170 (3502/5067)	7720/11240 (3502/5098)	7700/11230 (3524/5094)
WHEELS & TIRES	33	Tire size - front		28 X 12 X 22		
	34	Tire size - rear		22 X 12 X 16		
	35	Wheelbase	in (mm)	72.0 (1830)		
	37	Ground clearance under mast, laden	in (mm)	4.1 (104)		
	38	Ground clearance at center of wheelbase	in (mm)	7.4 (188)		
	39	Brakes Service - Method of Control/Operation		Hydraulic/Foot		
	40	Brakes Park - Method of Control/Operation		Mechanical/Hand		
	41	Battery Type		Maintenance Free		
TRANS. & POWER UNIT	42	Battery Volts/Cold Cranking Amps		12V/475	12V/475	12V/900
	43	Engine manufacturer/type		GM Gasoline	GM LPG	Kubota Turbo Diesel
	44	Engine output, in accordance with ISO1585	hp (KW)	98 (73) @ 2400 RPM	101 (75) @ 2400 RPM	74 (55) @ 2200 RPM
	45	Torque	ft-lb (N-m)	215 (290) @ 2400 RPM	220 (300) @ 2400 RPM	227 (309) @ 1400 RPM
	46	Number of cylinders/displacement	No./cc (ci)	V6/4302 (262)	V6/4302 (262)	4/3769 (230)
	47	Gear change type		Electronically Controlled Powershift		
	47a	Transmission: Number of speeds forward/reverse		3F/2R		
	48	Fuel Tank - Capacity (Gasoline- or Diesel-Powered Units Only)	gal (liters)	18.5 (70)		
	49	Working pressure for attachments	psi (bar)	2250 (153)		
	50	Hydraulic Tank - capacity (drain & refill)	gal (liters)	16.3 (61.8)		

S155FT SPECIFICATIONS

GENERAL	1	Manufacturer Name		Hyster Company		
	2	Model		S155FT		
		Transmission Type		Electronic Powershift		
	3	Load capacity	lbs/kg	15,500 (7,000)		
	4	Load center	in./mm	24 (610)		
	5	Drive Power Type: Gas, Diesel, LPG		Gasoline	LPG	Diesel
	6	Operation: Seated rider		Seated Rider		
	7	Step Height	in (mm)	20.9 (531)		
	8	Tires		Cushion		
	9	Number of wheels, front/rear (X = driven)		2X/2		
DIMENSIONS	9a	Track width, front	in (mm)	44.6 (1133)		
	9b	Track width, rear	in (mm)	46.9 (1192)		
	10	Lift height (TOF)	in (mm)	133 (3400)		
	11	Standard Free lift height	in (mm)	6 (160)		
	11a	Optional Free lift w/LBR (TOF)	in (mm)	50 (1295)		
	11b	Optional Free lift w/o LBR (TOF)	in (mm)	56 (1425)		
	12	Fork carriage width Standard Carriage	in (mm)	48 (1219)		
	13	Fork dimensions	in (mm)	6 X 2.5 X 48 (150 X 60 X 1219)		
	13a	Fork Spacing – Std Carriage – Minimum Inside to inside edge	in (mm)	6 (160)		
	14	Fork Spacing – Std Carriage – Maximum outside to outside edge	in (mm)	43.7 (1109)		
	15	Mast tilt, forward/back	degrees	6 F/10 B		
	16	Overall length (length to face of forks)	in (mm)	115.3 (2930)		
	17	Overall width	in (mm)	56.6 (1438)		
	18	Height of Standard mast, lowered	in (mm)	107 (2697)		
	19	Height of mast, extended w/o load backrest	in (mm)	181 (4575)		
	19a	Height of mast, extended w/load backrest	in (mm)	183 (4632)		
	20	Height to top of Std. overhead guard (high)	in (mm)	91 (2302)		
	20a	Height to top of overhead guard (low)	in (mm)	88 (2235)		
	20b	Towing coupling height	in (mm)	15.3 (388)		
	21	Outer turning radius	in (mm)	101.8 (2585)		
	21a	Inner turning radius	in (mm)	4.3 (108)		
	22	Load distance (load face-ctr of wheel to face of forks-front overhang) 2-stg mast	in (mm)	19.6 (498)		
	22a	Load distance (load face-ctr of wheel to face of forks-front overhang) 3-stg mast	in (mm)	21.0 (534)		
	23	Right angle stack (with pallet W=42in, L=48in)	in (mm)	169.4 (4302)		
	23a	Right angle stack (add length of load)	in (mm)	121.4 (3083)		
	24	90° intersecting aisle (with pallet W=42in, L=48in)	in (mm)	91.2 (2317)		
PERFORMANCE	25	Travel speed	laden/unladen mph (km/hr)	12.5/12.0 (20.1/19.4)	12.5/12.0 (20.1/19.4)	12.9/12.4 (20.7/20.0)
	26	Lifting speed (2LFL)	laden/unladen ft/min (m/sec)	104/106 (0.53/0.54)	104/106 (.53/.54)	89/96 (.45/.49)
	26a	Lifting speed (3FFL)	laden/unladen ft/min (m/sec)	100/102 (0.51/0.52)	100/102 (.51/.52)	87/93 (.44/.47)
	27	Lowering speed (2LFL)	laden/unladen ft/min (m/sec)	114/104 (0.58/0.53)	114/104 (.58/.53)	114/104 (.58/.53)
	27a	Lowering speed (3FFL)	laden/unladen ft/min (m/sec)	108/81 (0.55/0.41)	108/81 (.55/.41)	108/81 (.55/.41)
	28	Maximum drawbar pull	laden/unladen lbs (kg)	10246/5041 (4647/2287)	10479/5069 (4753/2299)	11035/5090 (5005/2309)
	28a	Drawbar pull @ 1.0 mph or 1.6 km/h	laden/unladen lbs (kg)	8363/5041 (3793/2287)	8573/5069 (3889/2299)	8456/5090 (3836/2309)
	28b	Drawbar pull @ 3.0 mph or 4.8 km/h	laden/unladen lbs (kg)	5207/5041 (2362/2287)	5411/5069 (2454/2299)	4975/5090 (2257/2309)
	29	Gradeability max	laden/unladen %	28.7/23.9	29.3/23.9	30.8/23.9
	29a	Gradeability @ 1.0 mph or 1.6 km/h	laden/unladen %	23.1/23.9	23.6/23.9	23.2/23.9
WT.	29b	Gradeability @ 3.0 mph or 4.8 km/h	laden/unladen %	14.1/23.9	14.7/23.9	13.4/22.4
	31	Unladen weight (w/std equipment: mast, carriage, forks, etc.)	lbs (kg)	20820 (9444)	20750 (9412)	20860 (9462)
	32	Axle loading laden (w/std option configuration)	front/rear lbs (kg)	33010/3310 (14973/1501)	33010/3240 (14973/1470)	33060/3300 (14996/1497)
	32a	Axle loading unladen (w/std option configuration)	front/rear lbs (kg)	8110/12710 (3679/5765)	8110/12640 (3679/5733)	8160/12700 (3701/5761)
	33	Tire size – front		28 X 12 X 22		
	34	Tire size – rear		22 X 12 X 16		
	35	Wheelbase	in (mm)	72.0 (1830)		
	37	Ground clearance under mast, laden	in (mm)	4.1 (104)		
	38	Ground clearance at center of wheelbase	in (mm)	7.4 (188)		
	39	Brakes Service – Method of Control/Operation		Hydraulic/Foot		
WHEELS & TIRES	40	Brakes Park – Method of Control/Operation		Mechanical/Hand		
	41	Battery Type		Maintenance Free		
	42	Battery Volts/Cold Cranking Amps		12V/475	12V/475	12V/900
	43	Engine manufacturer/type		GM Gasoline	GM LPG	Kubota Turbo Diesel
	44	Engine output, in accordance with ISO1585	hp (KW)	98 (73) @ 2400 RPM	101 (75) @ 2400 RPM	74 (55) @ 2200 RPM
	45	Torque	ft-lb (N-m)	215 (290) @ 2400 RPM	220 (300) @ 2400 RPM	227 (309) @ 1400 RPM
	46	Number of cylinders/displacement	No./cc (ci)	V6/4302 (262)	V6/4302 (262)	4/3769 (230)
	47	Gear change type		Electronically Controlled Powershift		
	47a	Transmission: Number of speeds forward/reverse		3F/2R		
	48	Fuel Tank – Capacity (Gasoline- or Diesel-Powered Units Only)	gal (liters)	18.5 (70)		
TRANS. & POWER UNIT	49	Working pressure for attachments	psi (bar)	2250 (153)		
	50	Hydraulic Tank – capacity (drain & refill)	gal (liters)	16.3 (61.8)		

CERTIFICATION: These Hyster lift trucks meet design specifications of Part II ANSI B56.1-1969, as required by OSHA Section 1910.178(a)(2) and also comply with Part III ANSI B56.1-revision in effect at time of manufacture. Certification of compliance with the applicable ANSI standards appears on the lift truck.

† NOTE: Performance specifications / ratings are for truck equipped as described under Standard Equipment in this Technical Guide. Performance specifications are affected by the condition of the vehicle and how it is equipped, as well as by the nature and condition of the operating area. Specifications are subject to change and the proposed application should be discussed with your authorized Hyster Company Dealer.

†† Limited by traction. For further information on this dimension, please contact your local Hyster dealer.

S155FT SPECIFICATIONS

15

GENERAL	1	Manufacturer Name		Hyster Company		
	2	Model		S155FT		
		Transmission Type		DuraMatch™		
	3	Load capacity	lbs/kg	15,500 (7,000)		
	4	Load center	in./mm	24 (610)		
	5	Drive Power Type: Gas, Diesel, LPG		Gasoline	LPG	Diesel
	6	Operation: Seated rider		Seated Rider		
	7	Step Height	in (mm)	20.9 (531)		
	8	Tires		Cushion		
	9	Number of wheels, front/rear (X = driven)		2X/2		
DIMENSIONS	9a	Track width, front	in (mm)	44.6 (1133)		
	9b	Track width, rear	in (mm)	46.9 (1192)		
	10	Lift height (TOF)	in (mm)	133 (3400)		
	11	Standard Free lift height	in (mm)	6 (160)		
	11a	Optional Free lift w/LBR (TOF)	in (mm)	50 (1295)		
	11b	Optional Free lift w/o LBR (TOF)	in (mm)	56 (1425)		
	12	Fork carriage width Standard Carriage	in (mm)	48 (1219)		
	13	Fork dimensions	in (mm)	6 X 2.5 X 48 (150 X 60 X 1219)		
	13a	Fork Spacing – Std Carriage – Minimum Inside to inside edge	in (mm)	6 (160)		
	14	Fork Spacing – Std Carriage – Maximum outside to outside edge	in (mm)	43.7 (1109)		
	15	Mast tilt, forward/back	degrees	6 F/10 B		
	16	Overall length (length to face of forks)	in (mm)	115.3 (2930)		
	17	Overall width	in (mm)	56.6 (1438)		
	18	Height of Standard mast, lowered	in (mm)	107 (2697)		
	19	Height of mast, extended w/o load backrest	in (mm)	181 (4575)		
	19a	Height of mast, extended w/load backrest	in (mm)	183 (4632)		
	20	Height to top of Std. overhead guard (high)	in (mm)	91 (2302)		
	20a	Height to top of overhead guard (low)	in (mm)	88 (2235)		
	20b	Towing coupling height	in (mm)	15.3 (388)		
	21	Outer turning radius	in (mm)	101.8 (2585)		
	21a	Inner turning radius	in (mm)	4.3 (108)		
	22	Load distance (load face-ctr of wheel to face of forks-front overhang) 2-stg mast	in (mm)	19.6 (498)		
	22a	Load distance (load face-ctr of wheel to face of forks-front overhang) 3-stg mast	in (mm)	21.0 (534)		
	23	Right angle stack (with pallet W=42in, L=48in)	in (mm)	169.4 (4302)		
	23a	Right angle stack (add length of load)	in (mm)	121.4 (3083)		
	24	90° intersecting aisle (with pallet W=42in, L=48in)	in (mm)	91.2 (2317)		
PERFORMANCE	25	Travel speed	laden/unladen mph (km/hr)	13.0/12.5 (20.8/20.1)	13.0/12.5 (20.8/20.1)	13.0/12.6 (20.9/20.2)
	26	Lifting speed (2LFL)	laden/unladen ft/min (m/sec)	104/106 (0.53/0.54)	104/106 (.53/.54)	89/96 (.45/.49)
	26a	Lifting speed (3FFL)	laden/unladen ft/min (m/sec)	100/102 (0.51/0.52)	100/102 (.51/.52)	87/93 (.44/.47)
	27	Lowering speed (2LFL)	laden/unladen ft/min (m/sec)	114/104 (0.58/0.53)	114/104 (.58/.53)	114/104 (.58/.53)
	27a	Lowering speed (3FFL)	laden/unladen ft/min (m/sec)	108/81 (0.55/0.41)	108/81 (.55/.41)	108/81 (.55/.41)
	28	Maximum drawbar pull	laden/unladen lbs (kg)	10000/5041 (4536/2286)	10000/5069 (4538/2299)	10000/5090 (4536/2309)
	28a	Drawbar pull @ 1.0 mph or 1.6 km/h	laden/unladen lbs (kg)	10000/5041 (4536/2286)	10000/5069 (4538/2299)	10000/5090 (4536/2309)
	28b	Drawbar pull @ 3.0 mph or 4.8 km/h	laden/unladen lbs (kg)	6238/5041 (2830/2286)	6533/5069 (2963/2299)	5076/5090 (2302/2309)
	29	Gradeability max	laden/unladen %	27.9/23.9	27.9/23.9	27.9/23.9
	29a	Gradeability @ 1.0 mph or 1.6 km/h	laden/unladen %	27.9/23.9	27.9/23.9	27.9/23.9
	29b	Gradeability @ 3.0 mph or 4.8 km/h	laden/unladen %	17.3/23.9	17.9/23.9	13.7/23.9
WT.	31	Unladen weight (w/std equipment: mast, carriage, forks, etc.)	lbs (kg)	20820 (9444)	20750 (9412)	20860 (9462)
	32	Axle loading laden (w/std option configuration)	front/rear lbs (kg)	33010/3310 (14973/1501)	33010/3240 (14973/1470)	33060/3300 (14996/1497)
WHEELS & TIRES	32a	Axle loading unladen (w/std option configuration)	front/rear lbs (kg)	8110/12710 (3679/5765)	8110/12640 (3679/5733)	8160/12700 (3701/5761)
	33	Tire size – front		28 X 12 X 22		
	34	Tire size – rear		22 X 12 X 16		
	35	Wheelbase	in (mm)	72.0 (1830)		
	37	Ground clearance under mast, laden	in (mm)	4.1 (104)		
	38	Ground clearance at center of wheelbase	in (mm)	7.4 (188)		
	39	Brakes Service – Method of Control/Operation		Hydraulic/Foot		
	40	Brakes Park – Method of Control/Operation		Mechanical/Hand		
	41	Battery Type		Maintenance Free		
	42	Battery Volts/Cold Cranking Amps		12V/475	12V/475	12V/900
TRANS. & POWER UNIT	43	Engine manufacturer/type		GM Gasoline	GM LPG	Kubota Turbo Diesel
	44	Engine output, in accordance with ISO1585	hp (KW)	98 (73) @ 2400 RPM	101 (75) @ 2400 RPM	74 (55) @ 2200 RPM
	45	Torque	ft-lb (N-m)	215 (290) @ 2400 RPM	220 (300) @ 2400 RPM	227 (309) @ 1400 RPM
	46	Number of cylinders/displacement	No./cc (ci)	V6/4302 (262)	V6/4302 (262)	4/3769 (230)
	47	Gear change type		Electronically Controlled Powershift		
	47a	Transmission: Number of speeds forward/reverse		3F/2R		
	48	Fuel Tank – Capacity (Gasoline- or Diesel-Powered Units Only)	gal (liters)	18.5 (70)		
	49	Working pressure for attachments	psi (bar)	2250 (153)		
	50	Hydraulic Tank – capacity (drain & refill)	gal (liters)	16.3 (61.8)		

STANDARD LIFT SPECIFICATIONS

Overall Lowered Height	Free Fork Height w/o LBR	Max Fork Height	Extended Height w/LBR	Tilt Rwd/Fwd	Approximate Total Wt. of Standard Equipped Truck	
					S135FT	S155FT
in. (mm)	in. (mm)	in. (mm)	in (mm)		lbs. (kg)	lbs. (kg)
2-STAGE LIMITED FREE-LIFT (LFL) VISTA® MAST						
87 (2197)	6 (160)	94 (2400)	143 (3632)	10°/6°	18660 (8464)	20450 (9276)
107 (2697)	6 (160)	133 (3400)	183 (4632)	10°/6°	18960 (8600)	20750 (9412)
126 (3197)	6 (160)	173 (4400)	222 (5632)	10°/6°	19411 (8805)	21201 (9617)
3-STAGE FULL FREE-LIFT (FFL) VISTA® MAST						
88 (2227)	44 (1125)	149 (3800)	198 (5026)	6°/6°	19536 (8861)	21326 (9673)
100 (2527)	56 (1425)	185 (4700)	234 (5926)	6°/6°	19787 (8975)	21577 (9787)
112 (2827)	67 (1725)	220 (5600)	269 (6826)	6°/6°	20039 (9089)	21829 (9901)

Lift heights over 171.5" (4356 mm) maximum fork height are considered highlifts and require reduced capacity and restricted back tilt.
Total approximate weights listed include mast, standard carriage, load backrest extension and 70 lbs. LP tank and tank bracket.



STANDARD EQUIPMENT

Fortis® Package

Complete truck equipped with:

- GM 4.3L, V-6 emissions compliant engine
- Electronic powershift transmission
 - Hydraulic inching
 - Electronic shift control
 - 2 speeds forward, 2 speeds reverse
- Oil-cooled wet disc brakes
- MONOTROL® pedal
- 2-Stage limited free-lift (LFL) VISTA® mast with maximum fork height of 133" (2400 mm)
- 48.0" (1219 mm) wide hook-type carriage with 48.0" (1219) tall load backrest extension
- 48.0" (1219 mm) long forks
- 6 degrees forward and 10 degrees backward mast tilt
- 3-function hydraulic control valve
- Integrated dashboard display includes:
 - LCD Display:
 - Fuel level (Gasoline or Diesel only)
 - Hour meter
 - Coolant Temperature
 - Clock
 - Messages
 - Service Indicator Lights:
 - Alternator
 - Transmission oil temperature
 - Engine oil pressure
 - Brake fluid level
 - Fasten seatbelt
 - Low fuel level
 - Engine malfunction
 - System malfunction
 - Park brake
 - Coolant temperature
 - Forward, reverse and neutral direction indicators
- Hydrostatic power steering
- Non-suspension vinyl seat
- No-cinch seat belt
- Electronic horn
- Adjustable steer column
- Rubber floor mat
- High air intake
- Integral tie downs
- Operator restraint system
- Combi-cooler radiator
- Single pedal inch brake
- Hyster® Stability System (HSS)
- Cowl-mounted hydraulic control levers
- Swing out LPG tank bracket
- Pressure sensing low LPG fuel sensor
- 91" (2302 mm) Tall overhead guard
- 12 months / 2,000 hours manufacturer's warranty
- 36 months / 6,000 hours manufacturer's powertrain warranty
- Operator's manual
- UL Classification LP

Fortis® Advance Package

Complete truck equipped with:

- GM 4.3L, V-6 emissions compliant engine
- DuraMatch™ transmission
 - Electronic inching
 - Electronic shift control
 - Auto deceleration system
 - Controlled power reversal
 - Controlled roll back on ramps
 - 3 speeds forward, 2 speeds reverse
- Oil-cooled wet disc brakes
- MONOTROL® pedal
- 2-Stage limited free-lift (LFL) VISTA® mast with maximum fork height of 133" (2400 mm)
- 48.0" (1219 mm) wide hook-type carriage with 48.0" (1219) tall load backrest extension
- 48.0" (1219 mm) long forks
- 6 degrees forward and 10 degrees backward mast tilt
- 3-function hydraulic control valve
- Integrated dashboard display includes:
 - LCD Display:
 - Fuel level (Gasoline or Diesel only)
 - Hour meter
 - Coolant Temperature
 - Clock
 - Messages
 - Service Indicator Lights:
 - Alternator
 - Transmission oil temperature
 - Engine oil pressure
 - Brake fluid level
 - Fasten seatbelt
 - Low fuel level
 - Engine malfunction
 - System malfunction
 - Park brake
 - Coolant temperature
 - Forward, reverse and neutral direction indicators
- Hydrostatic power steering
- Non-suspension vinyl seat
- No-cinch seat belt
- Electronic horn
- Adjustable steer column
- Rubber floor mat
- High air intake
- Integral tie downs
- Operator restraint system
- Combi-cooler radiator
- Single pedal inch brake
- Hyster® Stability System (HSS)
- Cowl-mounted hydraulic control levers
- Swing out LPG tank bracket
- Optical sensing low LPG fuel sensor
- 91" (2302 mm) Tall overhead guard
- 12 months/2000 hours manufacturer's warranty
- 36 months / 6,000 hours manufacturer's powertrain warranty
- Operator's manual
- UL Classification LP

OPTIONS

- 3.8L Kubota turbo diesel engine
- High intensity LED lights (brake/tail/back-up)
- Powertrain protection system
- Premium monitoring
- High air intake with pre-cleaner
- Accumulator
- Keyless start (with auxiliary key switch)
- Auto deceleration system (N/A with Fortis Package)
- Controlled power reversal feature (N/A with Fortis Package)
- Controlled roll back on ramps (N/A with Fortis Package)
- Optional short height overhead guard
- Powertrain protection system
- Paper Applications kit
- Vented hood
- Heavy duty engine modification
- Swing-out, drop-down EZXchange™ LPG tank bracket
- Optical sensing low LPG fuel sensor (Fortis Package)
- Return to set tilt
- TouchPoint™ Electro-hydraulic mini-lever controls with fully adjustable armrest
- Rear drive handle with horn button
- Full suspension seat - vinyl or cloth
- Swivel full-suspension seat - vinyl or cloth
- Impact monitor
- Load weight display
- Operator pre-shift checklist
- Lever shift directional control
- Seat side directional control mounted on TouchPoint™ E-hydraulic control armrest
- Dual-inch brake pedals (N/A with Fortis Package)
- Operator password protection
- Audible Reverse activated 82-102 dB(A) self-adjusting alarm
- Visible amber strobe light - continuously activated, overhead guard mounted
- Parts publications - printed or CD, serial number specific
- UL Classification LPG, D, DS
- Various light packages with halogen or high intensity LED's
 - Two front and one rear work lights
 - Two front, one rear work light and two LED brake/tail/back-up lights
- Non marking smooth tires
- Lug drive

CAPACITY:

Model S135FT: 13,500 lbs. at 24.0" (6,000 kg at 610 mm) load center

Model S155FT: 15,500 lbs. at 24.0" (7,000 kg at 610 mm) load center

RATED CAPACITIES ARE FOR TRUCKS EQUIPPED WITH:

- 3-Stage full free-lift (FFL) VISTA® mast to 171.5" (4,356 mm) maximum fork height
- 48.0" (1,219 mm) hook-type carriage with 48.0" (1,219 mm) long forks
- 48.0" Tall load backrest extension (LBE)

MASTS

Masts are available in 2-stage limited free lift (LFL) and 2- or 3-stage full free-lift (FFL) VISTA® masts.

Masts show nested-channel design and full-radius, angled load rollers provides increased capacity at height while affording shorter overall length.

CARRIAGE

Carriages are hook-type, ITA Class IV mounting. Overall width without load backrest extension (LBE) is 47.3" (1201 mm); with LBE is 48.0". Minimum inside-to-inside edge fork spacing is 6.3" (160 mm). Maximum outside-to-outside edge fork spacing is 43.7" (1109 mm).

FORKS

S135-155FT lift trucks feature: 2.5" x 6" x 48.0" to 72.0" (60 x 150 x 1219 mm) long pallet forks.

Polished and full bottom tapered forks are also available.

ENGINE

GM 4.3L severe duty emissions compliant engine features:

- Cast iron block and cylinder heads with hardened exhaust valve seats, and hydraulic lifters
- Electronically controlled LPG fuel system
- Drive-by-wire throttle control
- Electronic governor
- Engine Control Unit (ECU)
- Three-way catalytic converter exhaust system
- 4.3L engine produces 101 horsepower

Kubota 3.8L Turbodiesel engine features:

- Cast iron block and heads
- High-Pressure Common Rail Fuel system
- Exhaust Gas Recirculation (EGR) emission system
- 4 valves / cylinder "Crossflow" cylinder head
- Full-authority electronic control integration
- High efficiency turbocharger
- Fuel filter with water separator
- Closed crankcase ventilation system
- Manual air intake restriction indicator
- 3.8L engine produces 74 horsepower

TRANSMISSION

- Standard Electronic Powershift: 2 speed forward/2 speed reverse range powershift, hydraulic inching (requires no adjustment), electric shift control, neutral start switch, and anti-restart protection
- DuraMatch™: All of the features of the standard electronic transmission plus 3 speed forward/2 speed reverse version Auto Deceleration System, electronic inching, controlled power reversal, controlled roll back on ramps

COOLING SYSTEM

- All models feature square-wave anti-clog Combi-cooler
- All radiators utilize cross-flow aluminum cores, pusher type fans and permanently lubricated water pumps
- "Knife-edge" type fan shrouds that direct air flow through the counterweight air passages
- 15 psi operating system pressure
- Combi-cooler contains an externally mounted transmission oil cooler to aid in heat dissipation

ELECTRICAL SYSTEM

- CANbus electrical system simplifies truck wiring and enhances truck dependability
- Ingress Protection rating 66 sealed automotive style electrical connectors
- Standardized wire routing, all wires are color coded, and marked with numbers for easy identification
- Vehicle System Manager (VSM) directly or indirectly controls all electrical functions except those controlled by the Engine Control Unit (ECU)
- 12-volt maintenance free battery provides 475 (900 Diesel) cold cranking amps (cca) for easy starts
- Onboard diagnostics monitoring and feedback

HYDRAULIC SYSTEM

Manual Hydraulic Control Valve & Electro-Hydraulic Controls Available

- Hydraulic lift system relief operates at 3400 psi (23.4 Mpa)
- Tilt and auxiliary systems have 2,200 psi (15.5 Mpa) relief pressure in all valve variations
- Hydraulic system is protected by a replaceable 10-micron element in-tank filter assembly
- Hydraulic breather filter includes an anti-splash baffle and is rated at three micron
- O-Ring face seal fittings with captive O-Ring grooves are used on all high pressure connections
- Emergency lowering valve allows load to be lowered in the event of battery power loss
- 100 Mesh suction line strainer

STEER AXLE / STEER SYSTEM

- Equal-area, double-ended, hydrostatic steering cylinder is mounted in cast ductile iron axle frame
- Elastomeric axle mounts absorb shock and allow lubrication free articulation
- Axle assembly utilizes synthetic boots and seals to retain lubricants and shield components against destructive grit and reduce lube points
- Wheel hubs rotate on large, tapered roller bearings
- Top spindle bearings lubricated through easy access lube fittings
- Hydrostatic steer system provides smooth, precise steering with only 4 turns lock-to-lock

BRAKES

- Oil-cooled wet disc brakes provide extremely long service life and are protected from dirt and moisture
- Hydraulically boosted single circuit master cylinder with sealed fluid reservoir and magnetic fluid level sensor
- Ratchet-type, hand-activated parking brake lever allows controlled application

OPERATOR COMPARTMENT

- Cowl-mounted hydraulic control levers
- TouchPoint™ hydraulic mini-lever controls with fully adjustable armrest (optional)
- 12-Inch textured steering wheel with spinner knob
- Automotive style foot controls with single braking/inching pedal (dual pedals are optional)
- Integrated dashboard display is backlit, allowing easy visibility under all lighting conditions
- Grid-style overhead guard offers superb visibility at extended heights
- Infinitely adjustable tilt steer column
- Optimal entry step height on both sides of the truck
- MONOTROL® pedal controls engine speed and truck direction, freeing operator's hands to operate steering and hydraulic levers

Special attachments, equipment or accessories not listed above may be available through Applications Engineering for specific application requirements.



FLEET SERVICES



HYSTER CAPITAL

A Division of NMHG Financial Services, Inc.

It's not just about the lift trucks.

Any company worth its weight knows success has just as much to do with the support before and after the sale as the sale itself. We pride ourselves on being more than just a lift truck manufacturer. Through our Dealer Network, we're also fleet managers, parts suppliers, capital procurement specialists and trainers. You'll find that when it comes to service, we do it all.

Hyster Fleet Services

As much as we'd like for your entire fleet to be Hyster, we know that's not always the case. But just because you also operate other brands doesn't mean we can't manage your lift truck maintenance and replacement plan. We can analyze your current fleet or provide summary of your fleet history and a cost-effective proposal for replacement and scheduled maintenance of all your vehicles. Once this initial review is complete, we'll continue to monitor your fleet to ensure it's performing optimally.

UNISOURCE™ Parts Program

In addition to providing fleet management for a variety of brands, we can also serve as your source of parts for all your lift trucks. With the Hyster UNISOURCE parts and service program, we offer approximately 2 million part number crosses for most brands of materials handling and other in-plant mobile equipment. UNISOURCE also has remanufactured parts that provide the same quality and guarantee but at a lower price. And we can deliver parts to you in less than 24 hours, any day of the week. How's that for convenience?

Rental Products

At Hyster Company, we're always looking for ways to help you keep your productivity up. Through the Hyster Dealer Network, you can access rental equipment for the times when leasing or buying isn't a practical option. Your local Hyster Dealer has access to over 14,000 units that are available for short- or long-term rental. Whether you need one truck to substitute for a vehicle that's being serviced or several lift trucks to accommodate seasonal changes in your business, we'll help you maintain output in a cost-effective manner.

Hyster Capital

We know that financing new additions to your fleet can sometimes be challenging. That's why your Hyster Dealer has a long list of ways for you to fund your purchase. We are skilled in arranging solutions for special financing requirements, taking the difficulties out of buying the equipment you need. Whether you purchase or lease a new or used lift truck, Hyster Capital offers better service and competitive rates, ensuring you receive the value you deserve.

Special Products

Engineering Department (SPED)

In a perfect world, every application could be handled with a standard lift truck. However, in the real world, different materials require different handling. That's why Hyster Company's Special Products Engineering Department works with you to customize* your lift trucks. From strobe lights to specially made forks, SPED can provide you with the tools you require to get the job done right.

** May be subject to an additional charge. Contact your local authorized Hyster Dealer for more information.*

Automated Warehouse Solutions

As society's technological capabilities advance, we strive to find practical applications. One of our most recent innovations in that pursuit is our development of automated warehouse solutions. We can help you determine if your operation would benefit from this type of system, which improves inventory accuracy, warehouse productivity and safety records, as it reduces maintenance and overtime.

Operator and Service Training


Hyster Company recognizes that proper training is a key element of a profitable company. That's why your local authorized Hyster Dealer offers a training program for your lift truck operators as well as those who maintain your vehicles. Proper education in running and servicing lift trucks cuts down on the number of repairs and risk of injuries due to accidents while increasing productivity. All of our trainers are professionals with experience in materials handling.





Hyster Company
P.O. Box 7006
Greenville, North Carolina
27835-7006
Part No. S135-155FT/BTG
10/2011 Litho in U.S.A.

**Visit us online at www.hysteramericas.com
or call us at 1-800-HYSTER-1.**

Hyster, , Fortis, and MONOTROL are registered trademarks of Hyster Company. Hyster products are subject to change without notice.

The Hyster Company products included in this document may be covered by U.S. Patent 6,684,148 and other patents pending.
Truck on cover shown with optional equipment. ©2011 Hyster Company. All rights reserved.

