




**STRONG PARTNERS.
TOUGH TRUCKS.™**



VNA MAN-UP TRUCKS

C1.0, C1.3, C1.5

1000 – 1500KG @ 600MM



C1.0, C1.3, C1.3 80, C1.3 L, C1.5 S, C1.5 M, C1.5 L

DISTINGUISHING MARKS	1.1	Manufacturer (abbreviation)
	1.2	Manufacturer's type designation
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker
	1.5	Rated capacity / rated loadQ (t)
	1.6	Load centre distancec (mm)
	1.8	Load distance, centre of drive axle to forkx (mm)
	1.9	Wheelbasey (mm)

WEIGHTS	2.1	Service weight	kg
	2.2	Axle loading, laden front/rear	kg
	2.3	Axle loading, unladen front/rear	kg

TYRES / CHASSIS	3.1	Tyres: polyurethane, tophane, vulkollan, front/rear
	3.2	Tyre size, front
	3.3	Tyre size, rear
	3.5	Wheels, number front/rear (x = driven wheels)
	3.6	Tread, frontb ₁₀ (mm)

DIMENSIONS	4.2	Height, mast lowered	h ₁ (mm)
	4.3	Free lift	h ₂ (mm)
	4.4	Lift	h ₃ (mm)
	4.5	Height, mast extended	h ₄ (mm)
	4.7	Height of overhead guard (cabin)	h ₅ (mm)
	4.8	Seat height relating to SIP/stand height	h ₇ (mm)
	4.11	Additional Lift	h ₁₀ (mm)
	4.14	Stand height, elevated	h ₁₂ (mm)
	4.15	Height, lowered	h ₁₃ (mm)
	4.19	Overall length 	l ₁ (mm)
	4.20	Length to face of forks 	l ₂ (mm)
	4.21	Overall width	b ₁ /b ₂ (mm)
	4.22	Fork dimensions DIN ISO 2331	s/e/l (mm)
	4.23	Fork carriage ISO 2328, class/type A, B	
	4.24	Fork-carriage width	b ₃ (mm)
	4.25	Distance between fork-arms	b ₅ (mm)
	4.27	Width across guide rollers	b ₆ (mm)
	4.29	Reach, lateral	b ₇ (mm)
	4.30	Reach, lateral from vehicle centreline	b ₈ (mm)
	4.31	Ground clearance, laden, below mast	m ₁ (mm)
	4.32	Ground clearance, center of wheelbase	m ₂ (mm)
	4.34.2	Aisle width for pallets 800mm x 1200mm lengthwise	A ₁₀ (mm)
	4.35	Turning radius	W ₈ (mm)
	4.38	Distance to swiveling-fork pivot	l ₆ (mm)
	4.39	Length rotator arm	n (mm)
	4.40	Width traverse frame	B (mm)
	4.41	Lost rotator width	F (mm)
	4.42	Transfer aisle width pallet 1200 x 1200 mm	Au (mm)

PERFORMANCE DATA	5.1	Travel speed, laden/unladen	km/h
	5.2	Lift speed, laden/unladen	m/s
	5.3	Lowering speed, laden/unladen	m/s
	5.4	Reaching speed, laden/unladen	m/s
	5.7	Gradeability, laden/unladen	%
	5.10	Service brake	

ELECTRIC ENGINE	6.1	Drive motor S2 60 minute rating	kW
	6.2	Lift motor S3 15% rating 	kW
	6.3	Battery according to DIN 43531/35/36 A,B,C, no	
	6.4	Battery voltage/nominal capacity K5	(V)/(Ah)
	6.5	Battery weight 	Kg

DRIVETRAIN MECHANISM	8.1	Type of drive unit

ADDITIONAL DATA	10.1	Operating pressure for attachments	bar
	10.2	Oil volume for attachments	l/min
	10.7	Sound pressure level at the driver's seat	dB (A)

HYSTER	HYSTER	HYSTER
C1.0	C1.3	C1.3 80
Electric (Battery)	Electric (Battery)	Electric (Battery)
Seated / Standing	Seated / Standing	Seated / Standing
1	1.3	1.3
600	600	600
431 	431 	431 
1783	1943	1943

6388		7077		8014	
5468	1920	6466	1911	7061	2252
3860	2528	4390	2686	4985	3028

polyurethane/polyurethane		polyurethane/polyurethane		polyurethane/polyurethane	
350 x 140		350 x 140		350 x 140	
400 x 160		400 x 160		400 x 160	
2	1(x)	2	1(x)	2	1(x)
1080 - 1285 - 1435 - 1585		1080 - 1285 - 1435 - 1585		1080 - 1285 - 1435 - 1585	

3290		2490		3990	
-		-		-	
4280		3570		8070	
7338 - 7498 - 8078 - 8358		6628 - 6788 - 7368 - 7648		11128 - 11288 - 11868 - 12148	
3058 - 3218 - 3798 - 4078		3058 - 3218 - 3798 - 4078		3058 - 3218 - 3798 - 4078	
425		425		425	
1980 - 2140 - 2720 - 3000		1980 - 2140 - 2720 - 3000		1980 - 2140 - 2720 - 3000	
4705		3995		8495	
80		80		80	
3538 (6)		3698 (2)		3698 (2)	
4484 		4644 		4644 	
1220 / 1220 - 1425 -1575 - 1725		1220 / 1220 - 1425 -1575 - 1725		1220 / 1220 - 1425 -1575 - 1725	
45 / 100 / 1200 		45 / 100 / 1200 		45 / 100 / 1200 	
No		No		No	
720		720		720	
508 ÷ 720		508 ÷ 720		508 ÷ 720	
1275 - 1475 - 1625 - 1775		1275 - 1475 - 1625 - 1775		1275 - 1475 - 1625 - 1775	
990 - 1190 - 1340 - 1490		990 - 1190 - 1340 - 1490		990 - 1190 - 1340 - 1490	
390 - 490 - 565 - 640		390 - 490 - 565 - 640		390 - 490 - 565 - 640	
70		70		70	
75		75		75	
1600 		1600 		1600 	
2100		2250		2250	
1101 		1101 		1101 	
670		670		670	
1200 - 1400 - 1550 - 1700		1200 - 1400 - 1550 - 1700		1200 - 1400 - 1550 - 1700	
210		210		210	
4140 		4295 		4295 	

9.9	10	10.4	10.5	10.4	10.5
0.33	0.42	0.33	0.42	0.36	0.42
0.50	0.50	0.50	0.50	0.60	0.60
0.19	0.20	0.19	0.20	0.19	0.20
6		6		6	
electric / mechanical		electric / mechanical		electric / mechanical	

7.5	7.5	8
2 x 15.7	2 x 15.7	2 x 19.1
B	B	A
45/560 (16)	48/700 (11)	80/420(12)
939	1119	1274

AC - MOSFET	AC - MOSFET	AC - MOSFET
-------------	-------------	-------------

150	150	150
6	6	6
< 65	< 65	< 65

Specification data is based on VDI 2198

HYSTER	HYSTER	HYSTER	HYSTER	1.1	DISTINGUISHING MARKS
C1.3 LWB	C1.5 SWB	C1.5 MWB	C1.5 LWB	1.2	
Electric (Battery)	Electric (Battery)	Electric (Battery)	Electric (Battery)	1.3	
Seated / Standing	Seated / Standing	Seated / Standing	Seated / Standing	1.4	
1.3	1.5	1.5	1.5	1.5	
600	600	600	600	1.6	
431	431	431	431	1.8	
2063	2063	2193	2388	1.9	

8563		8623		9454		10163	2.1	WEIGHTS
7216	2647	7615	2517	8153	2800	8482	3180	
5184	3378	5272	3351	5899	3644	6207	3955	

polyurethane/polyurethane	polyurethane/polyurethane	polyurethane/polyurethane	polyurethane/polyurethane	3.1	TYRES / CHASSIS
350 x 140	350 x 140	350 x 140	350 x 140	3.2	
406 x 178	406 x 178	406 x 178	406 x 178	3.3	
2	1(x)	2	1(x)	3.5	
1080 - 1285 - 1435 - 1585	1080 - 1285 - 1435 - 1585	1080 - 1285 - 1435 - 1585	1080 - 1285 - 1435 - 1585	3.6	

4240	4240	4740	5240	4.2	DIMENSIONS
-	-	-	-	4.3	
8820	8820	10140	11640	4.4	
11878 - 12038 - 12618 - 12898	11878 - 12038 - 12618 - 12898	13198 - 13358 - 13938 - 14218	14698 - 14858 - 15438 - 15718	4.5	
3058 - 3218 - 3798 - 4078	3058 - 3218 - 3798 - 4078	3058 - 3218 - 3798 - 4078	3058 - 3218 - 3798 - 4078	4.7	
425	425	425	425	4.8	
1980 - 2140 - 2720 - 3000	1980 - 2140 - 2720 - 3000	1980 - 2140 - 2720 - 3000	1980 - 2140 - 2720 - 3000	4.11	
9245	9245	10565	12065	4.14	
80	80	80	80	4.15	
3818	3818	3948	4143	4.19	
4764	4764	4894	5089	4.20	
1220 / 1220 - 1425 - 1575 - 1725	1220 / 1220 - 1425 - 1575 - 1725	1220 / 1220 - 1425 - 1575 - 1725	1220 / 1220 - 1425 - 1575 - 1725	4.21	
45 / 100 / 1200	45 / 100 / 1200	45 / 100 / 1200	45 / 100 / 1200	4.22	
No	No	No	No	4.23	
720	720	720	720	4.24	
508 ÷ 720	508 ÷ 720	508 ÷ 720	508 ÷ 720	4.25	
1275 - 1475 - 1625 - 1775	1275 - 1475 - 1625 - 1775	1275 - 1475 - 1625 - 1775	1275 - 1475 - 1625 - 1775	4.27	
990 - 1190 - 1340 - 1490	990 - 1190 - 1340 - 1490	990 - 1190 - 1340 - 1490	990 - 1190 - 1340 - 1490	4.29	
390 - 490 - 565 - 640	390 - 490 - 565 - 640	390 - 490 - 565 - 640	390 - 490 - 565 - 640	4.30	
70	70	70	70	4.31	
75	75	75	75	4.32	
1600 †	1600 †	1600 †	1600 †	4.34.2	
2370	2370	2495	2685	4.35	
1101	1101	1101	1101	4.38	
670	670	670	670	4.39	
1200 - 1400 - 1550 - 1700	1200 - 1400 - 1550 - 1700	1200 - 1400 - 1550 - 1700	1200 - 1400 - 1550 - 1700	4.40	
210	210	210	210	4.41	
4410	4410	4540	4735	4.42	

10.4	10.5	10.4	10.5	10.4	10.5	10.4	10.5	5.1	PERFORMANCE DATA
0.33	0.42	0.35	0.4	0.35	0.4	0.35	0.4	5.2	
0.50	0.50	0,60	0,60	0,60	0,60	0,60	0,60	5.3	
0,19	0,20	0,19	0,20	0,19	0,20	0,19	0,20	5.4	
6		6		6		6		5.7	
electric / mechanical		electric / mechanical		electric / mechanical		electric / mechanical		5.10	

7.5	8	8	8	6.1	ELECTRIC ENGINE
2 x 15,7	2 x 19,1	2 x 19,1	2 x 19,1	6.2	
B	A	A	A	6.3	
48/1085 (17)	8/560 (13)	80/700	80/840	6.4	
1577	1547	1872	2206	6.5	

AC - MOSFET	AC - MOSFET	AC - MOSFET	AC - MOSFET	8.1	DRIVE/BRAM MECHANISM
-------------	-------------	-------------	-------------	-----	----------------------

150	150	150	150	10.1	ADDITIONAL DATA
6	6	6	6	10.2	
< 65	< 65	< 65	< 65	10.3	

MAST INFORMATION

Values shown are for standard equipment. When using non-standard equipment these values may change. Please contact your Hyster dealer for information.

2 STAGE TRI-FORM MAST

MODEL	MFH H	OALH h1	OALH h6 (Mini Mast)	FL h9	ML h3	Ext Ht W/LBRX h4'	Ext Ht h4	Platform Ht h12
	mm	mm	mm	mm	mm	mm	mm	mm
C1.0 C1.3 C1.3 80 C1.3 LWB C1.5 SWB	5235	2740	3020	1980	3180	6237.0	6200	3605
	5735	2990	3020	1980	3680	6737.0	6700	4105
	6235	3240	3020	1980	4180	7237.0	7200	4605
	6335	3290	3020	1980	4280	7337.0	7300	4705
	6735	3490	3020	1980	4680	7737.0	7700	5105
	6935	3590	3020	1980	4880	7937.0	7900	5305
	7235	3740	3020	1980	5180	8237.0	8200	5605
	7535	3890	3020	1980	5480	8537.0	8500	5905
	7735	3990	3020	1980	5680	8737.0	8700	6105
C1.3 C1.3 80 C1.3 LWB C1.5 SWB	8035	4140	3020	1980	5980	9037.0	9000	6405
	8135	4190	3020	1980	6080	9137.0	9100	6505
	8235	4240	3020	1980	6180	9237.0	9200	6605
	8535	4390	3020	1980	6480	9537.0	9500	6905
	8735	4490	3020	1980	6680	9737.0	9700	7105
	9035	4640	3020	1980	6980	10037.0	10000	7405
	9235	4740	3020	1980	7180	10237.0	10200	7605
	9335	4790	3020	1980	7280	10337.0	10300	7705
	9535	4890	3020	1980	7480	10537.0	10500	7905
	9735	4990	3020	1980	7680	10737.0	10700	8105
	9915	5240	3020	1980	7860	10917.0	10880	8285
	10215	5390	3020	1980	8160	11217.0	11180	8585
	10515	5540	3020	1980	8460	11517.0	11480	8885
	10915	5740	3020	1980	8860	11917.0	11880	9285
	11415	5990	3020	1980	9360	12417.0	12380	9785
	11615	6090	3020	1980	9560	12617.0	12580	9985
	11915	6240	3020	1980	9860	12917.0	12880	10285
	12315	6440	3020	1980	10260	13317.0	13280	10685

3 STAGE TRI-FORM MAST

MODEL	MFH H	OALH h1	OALH h6 (Mini Mast)	FL h9	ML h3	Ext Ht W/LBRX h4'	Ext Ht h4	Platform Ht h12
	mm	mm	mm	mm	mm	mm	mm	mm
C1.3 C1.3 80 C1.3 LWB C1.5 SWB	5625	2490	3020	1980	3570	6627.0	6590	3995
	6375	2740	3020	1980	4320	7377.0	7340	4745
	7125	2990	3020	1980	5070	8127.0	8090	5495
	7875	3240	3020	1980	5820	8877.0	8840	6245
	8625	3490	3020	1980	6570	9627.0	9590	6995
	9375	3740	3020	1980	7320	10377.0	10340	7745
	10125	3990	3020	1980	8070	11127.0	11090	8495
	10875	4240	3020	1980	8820	11877.0	11840	9245
	11625	4490	3020	1980	9570	12627.0	12590	9995
	12375	4740	3020	1980	10320	13377.0	13340	10745

MAST INFORMATION

Values shown are for standard equipment. When using non-standard equipment these values may change. Please contact your Hyster dealer for information.

2 STAGE QUAD-FORM MAST

MODEL	MFH H	OALH h1	OALH h6 (Mini Mast)	FL h9	ML h3	Ext Ht W/LBRX h4'	Ext Ht h4	Platform Ht h12
	mm	mm	mm	mm	mm	mm	mm	mm
C1.5 MWB C1.5 LWB	5415	2990	3020	1980	3360	6417	6380	3785
	5915	3240	3020	1980	3860	6917	6880	4285
	6415	3490	3020	1980	4360	7417	7380	4785
	6915	3740	3020	1980	4860	7917	7880	5285
	7415	3990	3020	1980	5360	8417	8380	5785
	7915	4240	3020	1980	5860	8917	8880	6285
	8415	4490	3020	1980	6360	9417	9380	6785
	8915	4740	3020	1980	6860	9917	9880	7285
	9415	4990	3020	1980	7360	10417	10380	7785
	9915	5240	3020	1980	7860	10917	10880	8285
	10215	5390	3020	1980	8160	11217	11180	8585
	10915	5740	3020	1980	8860	11917	11880	9285
	11415	5990	3020	1980	9360	12417	12380	9785
	11915	6240	3020	1980	9860	12917	12880	10285
	12315	6440	3020	1980	10260	13317	13280	10685



3 STAGE QUAD-FORM MAST

MODEL	MFH H	OALH h1	OALH h6 (Mini Mast)	FL h9	ML h3	Ext Ht W/LBRX h4'	Ext Ht h4	Platform Ht h12
	mm	mm	mm	mm	mm	mm	mm	mm
C1.5 MWB C1.5 LWB	6945	2990	3020	1980	4890	7947	7910	5315
	7695	3240	3020	1980	5640	8697	8660	6065
	8445	3490	3020	1980	6390	9447	9410	6815
	9195	3740	3020	1980	7140	10197	10160	7565
	9945	3990	3020	1980	7890	10947	10910	8315
	10695	4240	3020	1980	8640	11697	11660	9065
	11445	4490	3020	1980	9390	12447	12410	9815
	12195	4740	3020	1980	10140	13197	13160	10565
	12945	4990	3020	1980	10890	13947	13910	11315
	13695	5240	3020	1980	11640	14697	14660	12065
	15945	5990	3020	1980	13890	16947	16910	14315

AUXILIARY MINI MAST OPTIONS

FL h9	OALH, h6 (Mini Mast)	Delta H	Ext Ht W/h3 = 0 h6'	Delta h6	Delta h9	h6' - h6	Delta h4'	Delta h4	MiniMast CL
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
1980	3020	0	3057	0	0	37	0	0	2950
2140	3020	160	3217	0	160	197	197	0	2950
2720	3585	740	3797	565	740	212	777	565	3515
3000	3865	1020	4077	845	1020	212	1057	845	3795

TRUCK DIMENSIONS

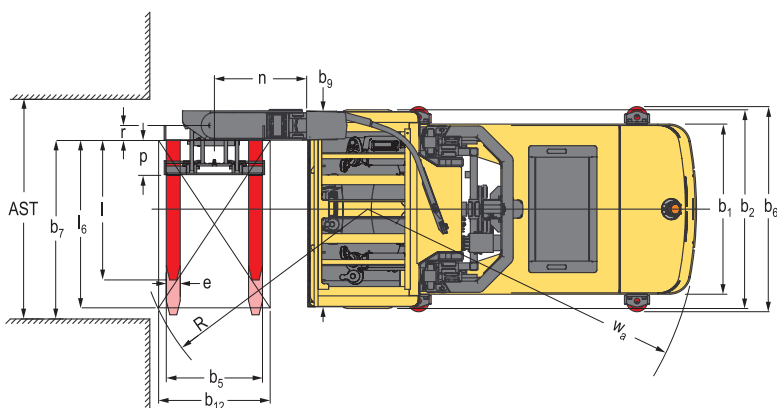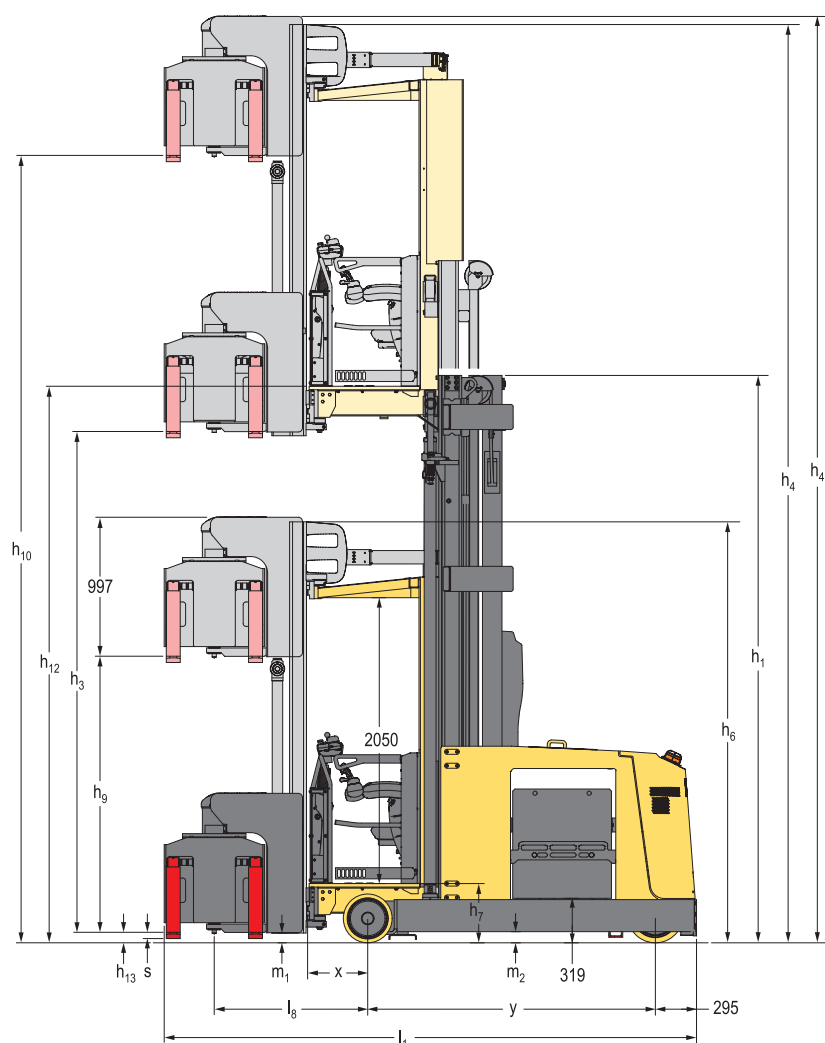

NOTE:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. If these specifications are critical, the proposed application should be discussed with your dealer.

* Values for Truck type / Mast height

◆ +76mm for 3 stage mast with "n" = 670 (C1.0, C1.3, C1.380, C1.3LWB, C1.5SWB)

● +150mm for 3 stage mast with "n"=670 mm (C1.5MWB, C1.5LWB)

◆ Available fork length
800 - 1000 - 1066 - 1200 mm

† Ast : load dimension function

△ -100mm for "n" = 570 mm

◇ $A_u = R + W_a + 200$ mm

⊗ Forks nested

▲ Forks forward = 1200 fork length

■ These values may vary of +/- 5%

✕ Value referred to S3 25%

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

NOTICE

Care must be exercised when handling elevated loads. When the carriage and/or load is elevated, truck stability is reduced. It is important that mast tilt in either direction be kept to a minimum when loads are elevated

Operators must be trained and adhere to the instructions contained in the Operating Manual.

Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

CE Safety:

This truck conforms to the current EU requirements.

PRODUCT FEATURES

DEPENDABILITY

- C1.0-1.5 have been through over intense test cycles, including stress analysis, endurance, thermal and stability tests, as well as field tests in multiple customer applications.
- Patented QUAD-form mast design gives increased rigidity and torsional strength.
- No need for additional support or bracing due to Hyster mast design.

PRODUCTIVITY

- 30 kW / 80 V motors provides industry leading level of performance
- Max flexibility through slim turret head allows the truck to work in very small aisles
- Integral pantograph on the turret head.
- Excellent fork tip visibility improves handling and controllability.
- Standard load weight sensing calculates speed to height to weight for maximum performance.

ERGONOMICS

- Hyster C-series is designed and built around operator needs, providing comfortable driving experience and maximum handling efficiency.
- Patented seat provides optimal driver comfort: spring-loaded, return to centre, rotating and adjustable to suit a wide range of operator weights.
- Maximum comfort and leg room through unrivalled cabin space.
- Forward-mounted with 3-way adjustable controls
- Seat-side controls, specifically designed for intensive pallet handling environment.
- Fully adjustable operator controls, for standing and seated positions.
- Infrared sensors to detect operator presence, avoids the need for continual pressure on a button
- Patented large foot sensor gives the driver maximum freedom of movement.

COST OF OWNERSHIP

- Sealed AC motors minimize maintenance.
- CANbus electronic communication and thermal management systems to keep maintenance to a minimum.
- 1 000 hrs service intervals.
- Efficient energy management system keeps the truck working through extended shifts.
- Wide range of truck configurations and options allows customer to select the most productive and cost efficient model for any application.

SERVICEABILITY

- Electric Truck AC Control (ETACC) PC-based diagnostic tool.
- Easy service access speeds up maintenance and improve uptime.
- Vehicle System Manager (VSM) delivers diagnostic data to the dash display, anticipating maintenance needs and improving faults diagnosis, as well as aiding correction.

STRONG PARTNERS. TOUGH TRUCKS.™

FOR DEMANDING OPERATIONS, EVERYWHERE.

Hyster supplies a complete range of warehouse equipment, IC and electric counterbalanced trucks, container handlers and reach stackers. Hyster is committed to being much more than a lift truck supplier.

Our aim is to offer a complete partnership capable of responding to the full spectrum of material handling issues: Whether you need professional consultancy on your fleet management, fully qualified service support, or reliable parts supply, you can depend on Hyster.

Our network of highly trained dealers provides expert, responsive local support. They can offer cost-effective finance packages and introduce effectively managed maintenance programmes to ensure that you get the best possible value. Our business is dealing with your material handling needs so you can focus on the success of your business today and in the future.



HYSTER EUROPE

Centennial House, Frimley Business Park, Frimley, Surrey, GU16 7SG, England.

Tel: +44 (0) 1276 538500



www.hyster.eu



infoeurope@hyster.com



[/HysterEurope](https://www.facebook.com/HysterEurope)



[@HysterEurope](https://twitter.com/HysterEurope)



[/HysterEurope](https://www.youtube.com/HysterEurope)



HYSTER-YALE UK LIMITED trading as Hyster Europe. Registered Address: Centennial House, Building 4.5, Frimley Business Park, Frimley, Surrey, GU16 7SG, United Kingdom. Registered in England and Wales. Company Registration Number: 02636775.

HYSTER,  and FORTENS are registered trademarks in the European Union and certain other jurisdictions.

MONOTROL® is a registered trademark, and DURAMATCH and  are trademarks in the United States and in certain other jurisdictions.

Hyster products are subject to change without notice. Lift trucks illustrated may feature optional equipment.