



**STRONG PARTNERS.
TOUGH TRUCKS.™**

P2.0UTS

ELECTRIC RIDER PALLET TRUCK

WWW.HYSTER.COM

> P2.0UTS OVERVIEW

The Hyster® electric rider pallet truck P2.0UTS delivers a low cost of operation. These robust platform pallet trucks can optimize vehicle loading and unloading operations, as well as boosting pallet transportation rates over short and long distances.

Productivity

- Advanced AC control system eliminates the motor brushes, which limits maintenance requirements
- Low skirtings on main chassis
- The side battery roll-out system is very convenient to replace batteries
- Built-in pressure relief valve protects the trucks from overloading
- Emergency power disconnect switch
- Long handle reduces steering effort
- Emergency reversing system in handle
- Low speed switch in the handle
- Variable speed control
- Cold store configuration (option)

Optimum Structural Design

- Spring-loaded casters improve lateral stability on uneven floors and enhance truck performance and service life
- Formed heavy gauge steel provides maximum fork strength and longevity
- Pull rod design protects against bending
- Durable plastic covers

Serviceability

- CANbus technology reduces wiring complexity
- Low battery protection setting extends the battery life
- All pivot points have grease fittings and serviceable bushing, reducing component wear



*Handle (Standard)
(Left & Right Handed)*



*Entry roller for
easy operation*

P2.0UTS POWER PLUG TYPE



A
Power
Plug





F
Power
Plug



G
Power
Plug



I
Power
Plug

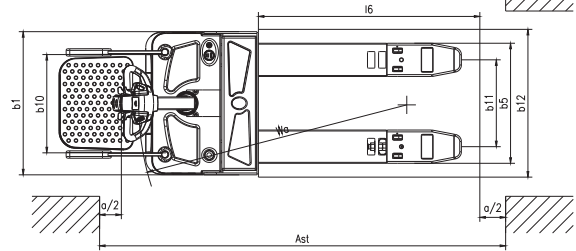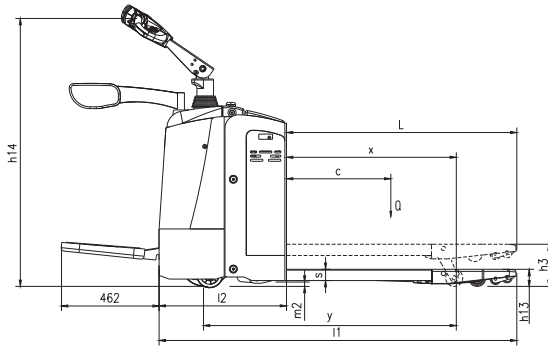

MODEL		P2.OUTS
Load capacity	Q (kg)	2000
Load center distance	c (mm)	600
Load distance, center of drive axle to fork	x (mm)	815/865/935
Fork height, lowered	h13 (mm)	82
Tire size, front	mm	250×70
Tire size, rear	mm	82×126 (98)
Additional wheels (dimensions)	mm	127×57
Wheels, number front rear (x=driven wheels)		1X+2/2 (4)
Max. lift height	h3 (mm)	202
Height of tiller in drive position min./max	h14 (mm)	1150/1430
Overall length	l1 (mm)	1710/1760/1830
Length to face of forks	l1 (mm)	610
Overall width	b1 (mm)	775
Fork dimensions	s/e/l (mm)	53×180×1100 (1150/1220)
Width overall forks	b5 (mm)	520/550/650/685
Aisle width for pallets 1000×1200 crossways	Ast (mm)	1910/1960/2030
Aisle width for pallets 800×1200 crossways	Ast (mm)	2010/2010/2030
Turning radius	Wa (mm)	1550/1600/1670
Travel speed, laden/unladen	Km/h	7/7.1
Battery voltage, nominal capacity K5	V/Ah	24/210
Battery weight	kg	196
Battery dimensions l/w/h	mm	750×170×534
Service weight (with battery)	kg	720



Hyster Company
P.O. Box 7006
Greenville, North Carolina
27835-7006
Part No. P2.0UTS/BTG/CARIB
4/2020 Litho in U.S.A.

Visit us online at www.hyster.com or call us at **1-800-HYSTER-1**.

Hyster,  and STRONG PARTNERS, TOUGH TRUCKS, are registered trademarks in the United States and certain other jurisdictions. Hyster products are subject to change without notice.

Trucks may be shown with optional equipment. © 2020 Hyster Company. All rights reserved.