



**STRONG PARTNERS.  
TOUGH TRUCKS.™**

# **T6.0UT**

## **SEATED ELECTRIC TOW TRACTOR**

**[WWW.HYSTER.COM](http://WWW.HYSTER.COM)**

## > T6.OUT OVERVIEW

The Hyster® seated electric tow tractor T6.0UT combines ergonomic features and reliable performance with energy efficient technology. Low maintenance helps deliver increased productivity and reduced operational costs.

### Productivity

- High-power drive motor
- Impressive pulling performance
- Seamless travel and maneuverability
- 3 operation modes available
- Ergonomic design
- Adjustable seat and steering column
- Rear multi-position tow coupling
- Maintenance-free AC motor
- Multi-function LCD dash display
- Emergency stop button

### Serviceability

- Easy access for fast and efficient servicing
- Simple, readily available components
- CANbus technology reduces wiring complexity
- Built-in diagnostics, accessible via the dash display
- Computer-based diagnostics not required

### Ergonomics & Structural Design

- Operator Presence System (OPS)
- Non-slip, uncluttered floor plate
- Drive axle design and low center of gravity for added stability
- Low noise level
- High quality, robust components

### Optional Features

- Power steering
- Automatic electro-magnetic parking brake
- Seatbelt reminder system
- Semi-closed cabin
- Rear view mirrors
- Non-marking tires
- Blue light and strobe light
- Keyless key switch (password)





*Ergonomic operator compartment*



*Easy service access via back cover*




MODEL		T6.0UT
Power type		48-Volt
Operator type		Seated
Rated capacity	kg	6000
Drawbar pull, 60min rating	N	1500
Max drawbar pull, 5min rating	N	6000
Wheelbase	L1 (mm)	1280
Rear load distance	L2 (mm)	500
Service weight	kg	1360
Axle loading, unladen front / rear	kg	450 / 910
Front, tire size / type (no. of wheels)		15x4.5 Solid (1)
Rear, tire size / type (no. of wheels)		4.00-8 Solid (2)
Wheel tread, front	mm	n/a
Wheel tread, rear	W1 (mm)	946
Seat height (standard)	h4 (mm)	910
Coupling height	h1 / h2 / h3 (mm)	295 / 370 / 440
Overall length	L (mm)	1995
Overall width	W (mm)	1100
Overall height (excluding cab)	H (mm)	1280
Approach angle	$\alpha 1$ (°)	$\geq 45$
Departure angle	$\alpha 2$ (°)	$\geq 40$
Min ground clearance	X (mm)	90
Turning radius	Wa (mm)	1650
Travel speed, unladen	km/h	14.5
Travel speed, laden	km/h	8
Gradeability, laden / unladen	%	7 / 15
Service brake / parking brake		Hydraulic / Manual
Drive control		AC
Drive motor rating S2 60 min	kW	5.6
Steering motor rating S2 5 min (option)	kW	0.6
Battery ampere hours	Ah	400
Battery weight	kg	680
Sound level at the drivers ear according to EN / DIN 12 053	dB (A)	<68

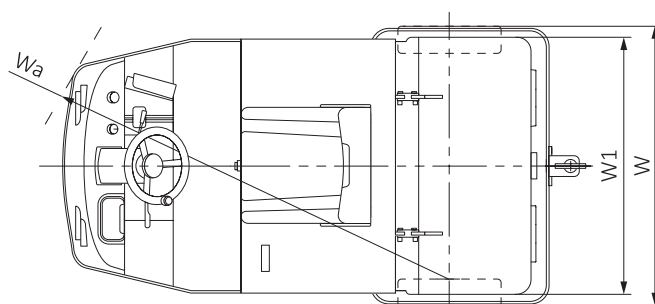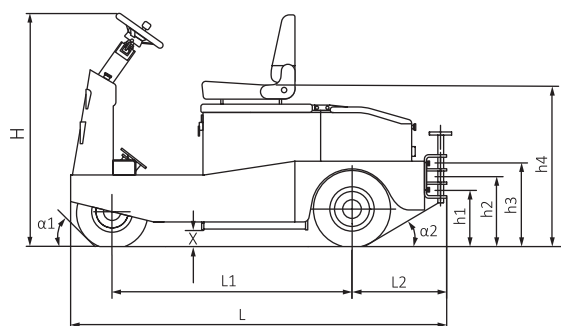



Hyster Company  
P.O. Box 7006  
Greenville, North Carolina  
27835-7006  
Part No. T6.0UTS/BTG/LAM  
6/2020 Litho in U.S.A.

Visit us online at [www.hyster.com](http://www.hyster.com) or call us at **1-800-HYSTER-1**.

Hyster,  and STRONG PARTNERS, TOUGH TRUCKS, are registered trademarks in the United States and certain other jurisdictions. Hyster products are subject to change without notice.

Trucks may be shown with optional equipment. © 2020 Hyster Company. All rights reserved.