




RAISING THE BAR



**IMPROVING STEEL
HANDLING EFFICIENCY**



TABLE OF CONTENTS

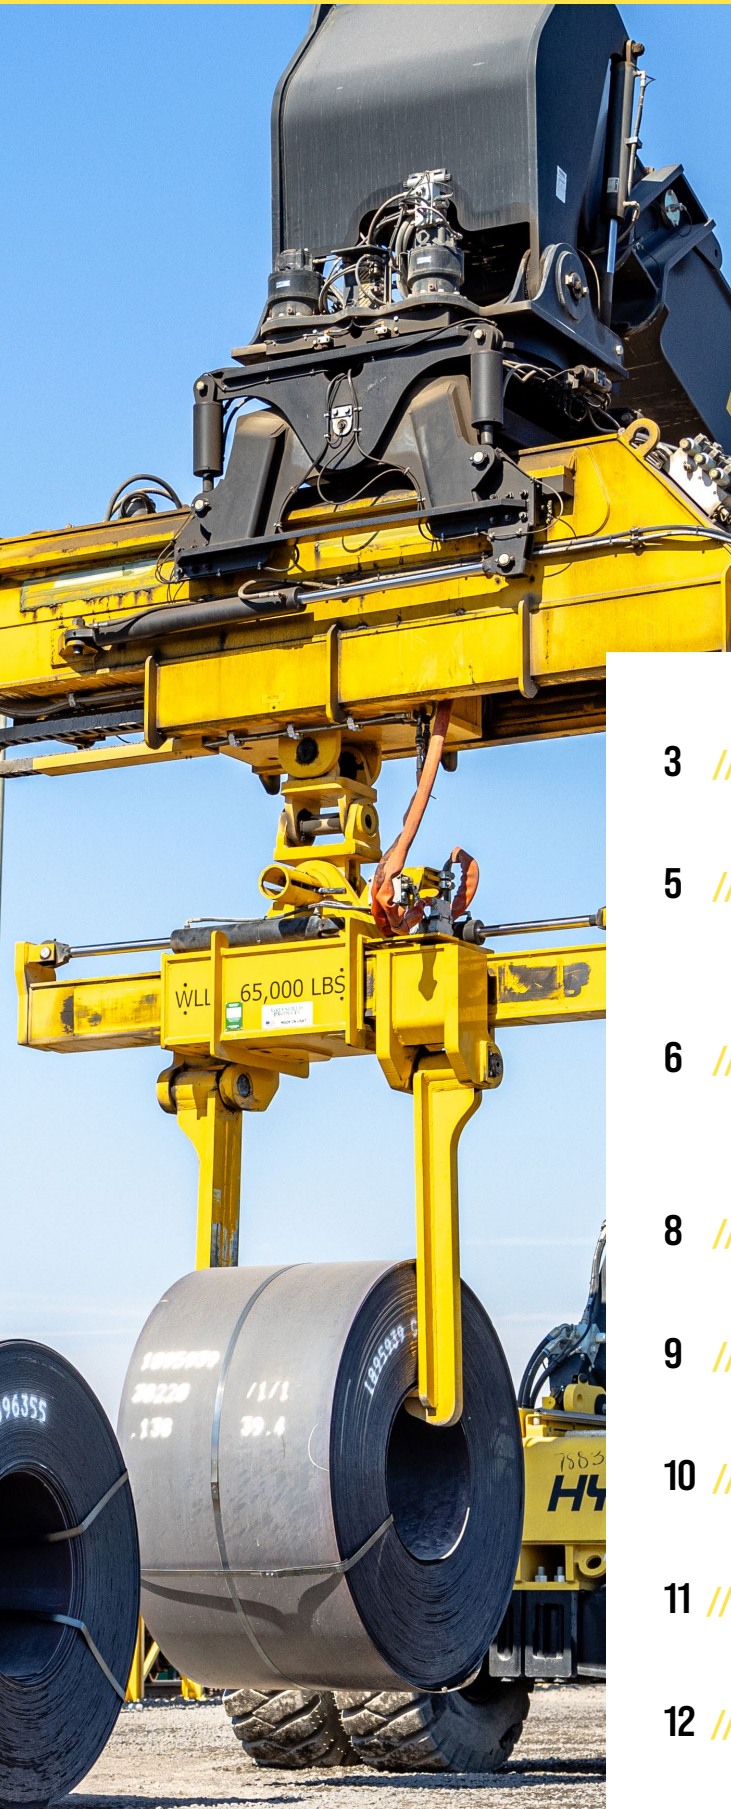

- 3 // HANDLING HOT METALS: DESIGNED TO TAKE THE HEAT
- 5 // MORE EFFICIENT STEEL DISTRIBUTION UNLOCKED BY VERSATILE REACH STACKERS
- 6 // RE-EVALUATING THE WORKFLOW FOR LOADING RAIL CARS
- 8 // COIL HANDLING GETS HUGE
- 9 // GETTING A HANDLE ON STEEL SLABS
- 10 // STRENGTH AND STABILITY FOR BILLET HANDLING
- 11 // KEEPING LONG-LOAD HANDLING STRAIGHT
- 12 // SUSTAINABILITY IN THE STEEL INDUSTRY



HANDLING HOT METALS: DESIGNED TO TAKE THE HEAT

// HEAT

Metal products of all kinds come from production environments characterized by extreme heat. And those extreme operating conditions place special demands on equipment, forcing them to stand up to heat, dust and increasingly higher payloads.


Sparks and molten metal splash can pose threats to operators and equipment performing at their best. Forklifts can be equipped with:

- **Fire suppression:** These systems detect fire and release extinguishing material to put it out. Depending on the truck and system, fire suppression can be triggered either automatically or manually from the operator compartment.
- **Cab protection:** A sacrificial plate helps protect the factory windshield. Critically, this plate is made of Lexan, which will melt rather than crack or break, allowing facilities to spot failure and replace with a new quick-mount plate.
- **Tilt cylinder protection:** If molten metal lands on the chrome rods of the tilt cylinder, it can melt the chrome and compromise seals that keep hydraulic oil from leaking out. A rubber accordion-style boot can cover the tilt cylinder to prevent molten metal from melting the chrome and seals.

Radiant heat from red-hot coils can not only pose danger to hoses, tires and lights, it can make its way through the coil ram and truck frame, causing them to weaken and become brittle. Forklifts can be equipped with key protective enhancements, including:

- **Tire shields:** A metal mudflap that shields the tire from heat to keep it from melting
- **Carriage valve:** Fire resistant Nomex, the material used in suits for race car drivers, can be deployed in a variety of ways to protect critical wires, hoses and valves. In extreme cases, the carriage valve can be relocated inside the cab to keep it away from heat.

- **Wrapped, free-hanging hoses:** Radiant heat can melt hoses close to the truck mast, risking flammable fluid spraying out if they rupture. Hoses can be covered in fire-resistant wrap and hang free, farther away from hot loads.

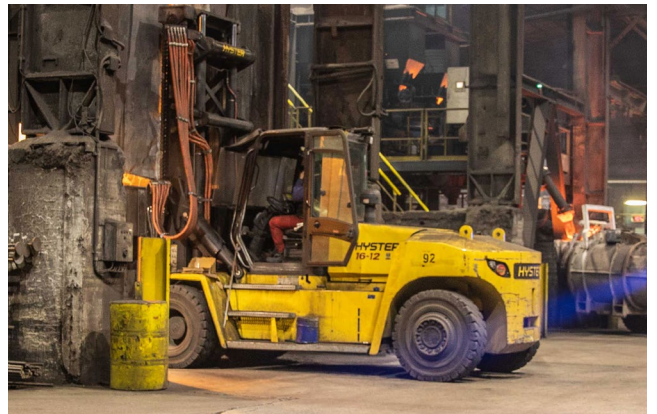

- **Water-glycol hydraulic fluid:** Rather than standard petroleum-based fluid, a non-combustible formulation can be used.
- **Lift cylinder heat shields and Viton seals:** Nomex-backed shields can help prevent lift cylinder seals from melting, and Viton seals are designed to withstand high levels of heat that would melt normal rubber seals.
- **Metal and glass light housings:** Rather than plastic housings for lights, heat-rated glass with steel or aluminum light housings can address the risk of cracking or breaking.

[Watch this video](#) to see ambient heat and metal splash solutions in action.



RE-EVALUATING THE WORKFLOW FOR LOADING RAIL CARS

// DUST



Metallic dust, known as slag, is a byproduct of molten metals. The atmosphere typical with metals manufacturing and production environments is often thick with fine, abrasive dust, posing challenges to systems that depend on clean air to function, from cabin air conditioning to engine and hydraulic systems.

- **Mudflaps:** When it rains, slag turns into a concrete-like substance, and without mudflaps, this can get kicked up and caked onto running boards, weighing them down and eventually breaking them off the truck.
- **Raised air intake:** For diesel engines that depend on pulling in clean air, snorkels fitted with additional filter elements can be positioned to move in air from above the dust cloud.
- **Radiator screens:** These prevent radiators from clogging and causing the engine and other critical components to overheat.
- **Diverter baffles:** Fans that normally cool the radiator can kick up dust, but with diverter baffles mounted to the frame of the truck, air is directed out the side to minimize dust clouds.
- **On-demand reversing radiator fans:** Normally, radiator fans blow air into the radiator to cool it, but enabling operators to reverse the flow when necessary to blow excessive dust away from the radiator can help keep it running effectively.
- **Sealed components:** By sealing electrical components, controllers and connectors, operations can keep dust infiltration to metallic-sensitive parts to a minimum.

// DEMANDING DUTY CYCLES

While the metals industry has hosted key advances, namely coils becoming larger and heavier, the zero tolerance for downtime and high productivity requirements remain consistent, with trucks often running 7,000 hours annually.

- **Mudflaps:** When it rains, slag turns into a concrete-like substance, and without mudflaps, this can get kicked up and caked onto running boards, weighing them down and eventually breaking them off the truck.
- **Raised air intake:** For diesel engines that depend on pulling in clean air, snorkels fitted with additional filter elements can be positioned to move in air from above the dust cloud.
- **Shortened wheelbase trucks:** While coils keep getting bigger, the layouts of metals environments have not. Shortened wheelbases on high-capacity trucks can give operations the ability to handle heavier coils while staying small enough to maneuver through tight spaces.



- **Tire liners:** A flat tire can bring a truck down. Liners act as a heat sink by adding rubber mass to absorb higher temperatures, helping make the tires less prone to puncture.
- **Centralized greasing:** Rather than maintenance technicians manually greasing nearly 100 individual fittings, the truck can automatically grease itself. This and other features, such as a tilting cab for easy access, can help limit the time trucks spend out of use for service.
- **Parts availability and strategic allocation:** Operations must have a plan for what parts are stocked locally and how quickly others can be accessed. The level of criticality, such as parts that can take trucks offline if they are not available, can help determine stock location and availability.



MORE EFFICIENT STEEL HANDLING UNLOCKED BY VERSATILE REACHSTACKERS

With automation, increased connectivity, just-in-time delivery parameters and evolving labor demographics reshaping industrial landscapes, change is constant, and the steel industry is no exception. Today, mills must serve demand for steel in a variety of shapes and sizes, and face expectations for greater speed and efficiency when moving steel from production to distribution and ultimately, to end users.

Mills face significant financial commitments, with demand for larger and wider coils driving major investments to widen coil production lines and produce steel in larger depth and diameter coils. The material handling equipment and labor necessary to move steel products also accounts for significant costs. But steel mills cannot afford to cut corners – doing so risks unsafe and ineffective coil, plate and slab handling, which can cause extremely costly lost-time accidents and mill shutdowns.

To stay competitive in such a challenging market, steel producers must re-examine not only the equipment they use, but how they use it. Instead of using multi-step, multi-machine workflows, what if they could shift to a streamlined approach, unlocking greater performance and efficiency to thrive in today's market?

Thanks to material handling equipment innovations that provide unprecedented flexibility, this streamlined approach is a growing reality for steel-handling operations. A single ReachStacker can now handle tasks traditionally divided between equipment like gantry systems and coil-ram lift trucks. This enables a consolidated workflow that avoids non-value-added steps like dropping loads at mid-points and changing equipment, while reducing overall equipment inventory and associated training time.



Steel mills can lose an average of \$150,000 per hour when the mill is not operational.



RE-EVALUATING THE WORKFLOW FOR LOADING RAIL CARS

The established process to move steel from production to rail cars is a lengthy one, involving multiple steps and pieces of equipment. ReachStackers have traditionally handled cargo containers and moved heavy loads around the yard. Often, other forklifts and slab carriers are dedicated to a single task, such as handling coils or slabs and bringing them to staging areas. Then, gantry crane systems have historically been utilized to lift and load finished metal goods into rail cars.

With steel mills facing competitive pressure to become more efficient, this workflow falls short when it comes to speed and cost. Cranes travel slowly, yet they must traverse long rows of rail cars to pick and place each load, and waiting for rail cars to shuttle in and out of buildings extends the process further. From a financial standpoint, investing in so many different pieces of equipment equates to greater capital expenditure, while labor efficiency suffers with operators requiring adequate training and shuffling between equipment dedicated only to a single task.

The average fully burdened labor rate for a steel mill forklift operator is approaching \$100/hour.

What could your operation do with a reduction in labor costs?

By using a ReachStacker, steel handling operations can engage in a more efficient, simple loading process, using a single piece of equipment to pick up finished pieces of steel and move them to staging and storage areas or load them directly into rail cars. ReachStackers can optimize the process by:

- Reaching far enough to load two rail cars deep without having to drive to a new loading position
- Side-loading rail cars and be equipped with gondola car lid lifters
- Driving and lifting up to four times faster than overhead cranes
- Enabling more precise load placement and thus avoiding time-consuming adjustments, due to an elevated cab that offers better visibility to get it right the first time
- Operating without the need for an outside spotter, freeing scarce labor for more valuable tasks
- Eliminating the need for extra rail spurs, opening up more yard space





RE-EVALUATING THE WORKFLOW FOR LOADING RAIL CARS

// A TRADITIONAL COIL HANDLING APPLICATION REQUIRES MULTIPLE, VERY COSTLY, DEDICATED-TASK MACHINES AND TRAINED OPERATORS.



OVERHEAD / GANTRY CRANE

Located at end of production line; pick up finished coils, place on railcars or transfer carts




TERMINAL TRACTORS

Pull coils on transfer carts to storage and staging areas



COIL-HANDLING LIFT TRUCK

Picks coils from storage yard and transfers to loading area

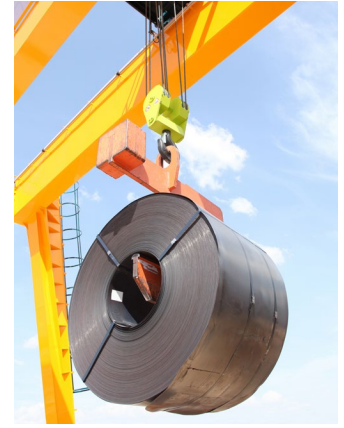

OVERHEAD / GANTRY CRANE


Pick and load coils for shipment



But a ReachStacker appropriately equipped for coil handling can safely and effectively execute all the coil picking, transportation and loading functions handled by fixed or moving cranes, conventional counterbalance lift trucks and ram tractors in a traditional application.

- Reduced product touches, minimizing opportunity for product damage or accidents
- Reduced labor and training requirements
- Fewer pieces of equipment to purchase and maintain
- Tool changing technology enables equipment to switch attachments to handle different tasks in simple, plug-and-play workflow [\[See video\]](#)

At Nucor Steel Arkansas, operators load up to 10 times as many railcars per day compared to their daily throughput with a straddle crane. **Watch this video to see it in action.**

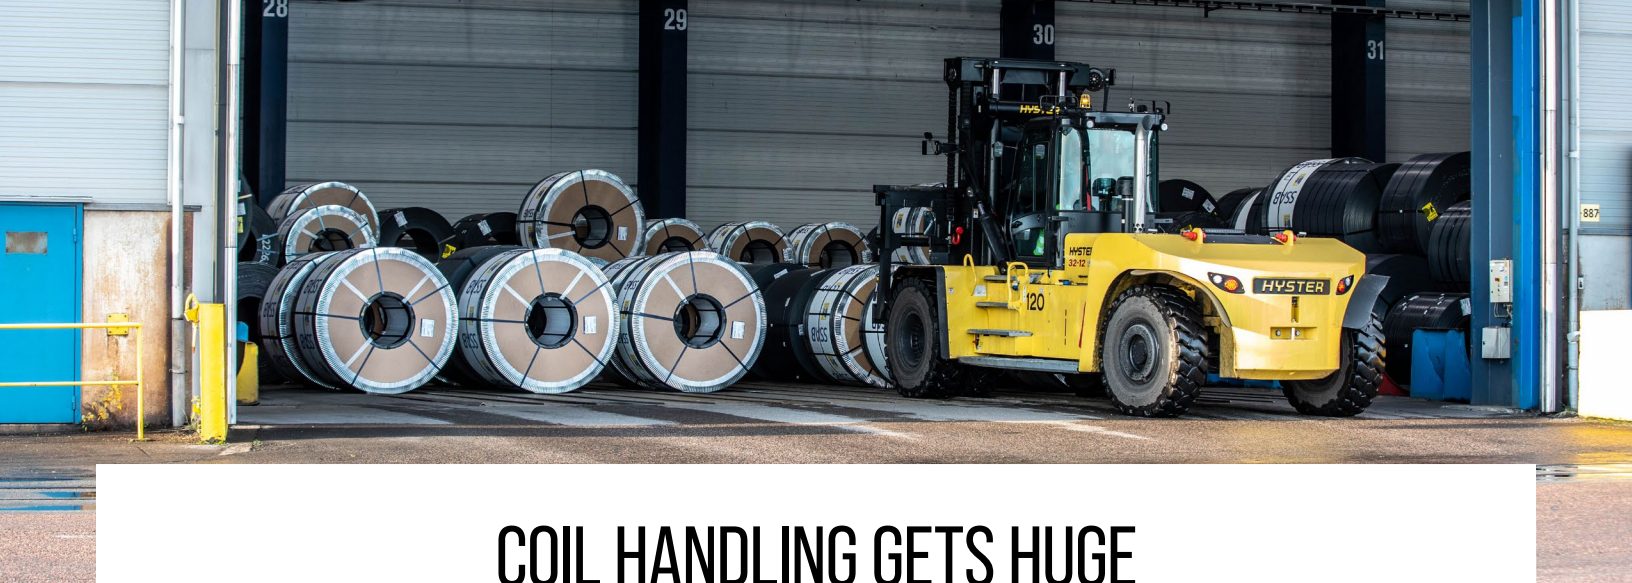

COIL HANDLING GETS HUGE

To keep production lines running longer and reduce coil change-out time, customers that manufacture products from steel are asking producers to provide larger coils. These new coils are as large as 96,000 pounds and 96 inches wide – up to 16,000 pounds heavier and 16 inches wider than the previous standard.

But for steel producers, creating – much less distributing – these larger coils is no small task. Mills are making significant investments to widen production lines and produce larger diameter coils, but they must also modify material handling and transportation infrastructure. This means higher capacity lift trucks and a transition to rail and barge travel instead of over-the-road semi-trucks.

// MAKE LIGHT WORK OF HEAVIER LOADS

To handle heavier, wider coils, a ReachStacker offers the right combination of size, heavy duty features and most importantly, greater payload. In addition to heavier booms, larger tires and axles, and right-sized coil handling attachments, ReachStackers can lift up to 120,000 pounds and offer an extended load center of up to 252 inches, not only accommodating wider coils, but providing the extended reach necessary to place them on a double deep rail car, or a widely staged semi-trailer flatbed.

Operations can also utilize attachments designed specifically for coil handling, like coil hooks and grabs.

- **Coil hooks**, similar to those used by overhead cranes, allow operators great flexibility when positioning coils on flat rail cars with coil cores placed perpendicular to the railroad tracks. They can even include an integrated rail lid lifter for quick, integrated access to loading targets.
- **Coil grabs** are an effective choice to load walled gondola cars. The grab arms need a minimal distance to release the coil, fitting inside the walls of the rail car for maximum precision.





GETTING A HANDLE ON STEEL SLABS

With end users demanding steel coils and slabs alike, mills must be prepared to produce, handle and load both types. Flat slabs possess key differences from coils and lift trucks require different attachments to effectively handle them.

// SLAB HANDLING ATTACHMENTS


- **Slab magnets** are used for stacking ambient temperature slabs in a storage yard and dropping them into place. Unlike clamps, magnets are well-suited for loading rail cars with side walls and they avoid the extra step of placing spacers between loads, expediting processes and enabling real productivity gains.
- **Slab tongs**, on the other hand, are typically used to grab and transport hot slabs around the yard and to load flat rail cars without walls. They enable more precise handling than forks.

QUICK AND EASY ATTACHMENT CHANGES

If mills use dedicated lift trucks to handle coils and others to handle slabs, they most likely pay for a bloated fleet. The inability to easily switch between proper tooling leaves coil handling trucks idle during slab handling, and vice versa.

New tool changing technology eliminates the cumbersome, arduous process of manually changing attachments and the need for excess lift trucks. Operators can change non-powered attachments like coils hooks or mechanical slab tongs without even leaving their seat. For items that require power, such as electricity for slab magnets or hydraulic power for clamping or rotating attachments, operators need to briefly leave the cab for a simple, plug-and-play workflow with quick-connecting fittings to connect the power supply. More easily and quickly switching between different attachments can enable a leaner, more productive fleet.

Watch the video to see for yourself.

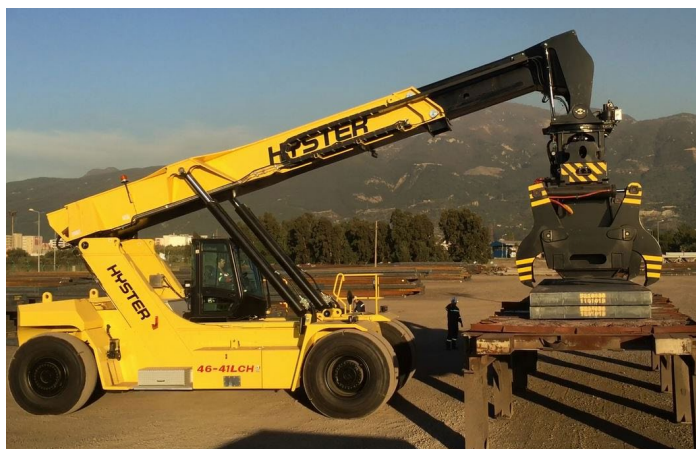



STRENGTH AND STABILITY FOR BILLET HANDLING

The round, cylindrical shape of billet steel pieces makes them susceptible to rolling on forks. When billets roll back toward the truck, they strike the forklift carriage, stressing components with great force. And if forks are tilted forward, billets can roll ahead and abruptly fall off, risking damage to the environment and other objects. Billets rolling in either direction creates scenarios where excessive forces are continually placed on the lift truck, causing equipment and product damage. Successfully handling billet steel means reducing product damage and handling costs with equipment that is tough enough for the job and designed to prioritize load stability.

// LOAD STABILITY AND EQUIPMENT DURABILITY

Whether billets roll forward or backward, product and equipment damage is a real possibility. Key enhancements to traditional lift truck forks and carriage components can promote load stability and equipment durability.

- **Heavy-duty radius forks** feature a curved fork shank designed to help disperse shock created when billets roll rearward and strike the lift truck carriage. The fork heel radius enables the billets to roll slightly upward, greatly reducing the shock force on the lift truck carriage and related components.
- **Heavy-duty poly blocking** is designed to stand up to the shock created by rolling billets. Roller bearings are the traditional means to enable the sideshifter and fork positioner to move along the carriage. When billets roll backward, roller bearings are commonly damaged – leading to costly replacement. Hyster has replaced traditional carriage roller bearings with poly blocking installed behind the forks and remains intact even when the carriage is shocked by heavy rolling billets.

In addition to radius forks and poly blocking, heavy-duty fork carriers, specially designed carriages with protection plates and increased under clearance are features billet mills should look for to keep equipment moving reliably – and keep handling costs under control.

EQUIPMENT DAMAGE FROM BILLETS CAN ADD UP FAST

Preparing for billets rolling backward is essential because they can lead to costly equipment damage, specifically for roller bearings. Traditional forklift systems use bearings located behind the forks to enable the sideshift and fork positioner to move along the carriage. But not only are those bearings fragile and expensive – they're easy targets for billets rolling backward. Replacing broken bearings not only costs money, but the resulting equipment downtime disrupts normal work and costs productivity.

For one billet mill operation, broken roller bearings had become an exceptionally common occurrence – up to five incidents each day. With replacement bearings costing as much as \$1,000 each, the costs added up quickly and the mill risked material handling costs spiraling out of control. But heavy-duty radius forks and poly blocking proved to be effective solutions. Once implemented, the mill no longer experienced any equipment damage or workflow disruptions.



KEEPING LONG-LOAD HANDLING STRAIGHT

Handling long steel loads, like beams and rebar, places unique stress on equipment. Effective long-load handling requires consideration of several variables, including road conditions, yard layout and equipment design. Long loads extend well beyond the sides of the lift truck acting as a huge lever that generates high amounts of torque that twists the mast and related components. This excess torque is especially powerful when the mast is elevated and operators travel through turns and over bumps and potholes, risking cracks and other damage to the mast, carriage and tilt cylinders.

// STRENGTH

Key enhancements can equip lift trucks to stand up to the demanding duty cycle of steel operations and the stresses specific to handling long loads.

- **Heavy-duty radius forks** feature a curved fork shank designed to help disperse shock created when billets roll rearward and strike the lift truck carriage. The fork heel radius enables the billets to roll slightly upward, greatly reducing the shock force on the lift truck carriage and related components.
- **Mast overlap:** The more overlap between the inner and outer mast channels, the more surface area to disperse the shock and torsion created when handling elevated loads over rough terrain. Additional overlap can help counteract the mast twist and boost durability.
- **Cross bracing:** To further strengthen the mast for heavy-duty applications, cross bracing between the mast pillars along with oversized mast channel brackets can help further improve mast solidity and stability carrying wide loads.
- **Super-duty mast mountings:** Enhanced mast mounting brackets, mast mounting pins and bearings can also serve to counteract the stresses of long load handling.

- **Carriage valve protection:** The hydraulic control valve is the meeting point for all hydraulic lines that configure and control forks, masts and other elements of carriages. To protect this critical point from costly damage in harsh conditions, manufacturers can place heavy-duty steel plates over the carriage valve.

// VISIBILITY

Moving long loads requires navigating steel yards with limited space and maneuvering around obstacles, often while the load is elevated. Not only does equipment need to be tough enough to withstand the stresses of such movements, but operators must have a clear view of their surroundings to properly position laden equipment. Camera systems are a useful tool to supplement operator views through and around the mast, to the side and behind the operator compartment.





SUSTAINABILITY IN THE STEEL INDUSTRY

Across industries, reducing environmental impact is becoming more of a mandate and less of a choice, whether driven by government regulation or corporate sustainability initiatives. In the steel industry, businesses are rolling out ambitious emissions reductions targets, such as a 30% reduction in Scope 1 (direct) and Scope 2 (indirect) emissions intensity per metric ton of crude steel by 2035. To achieve these goals, steel operations have industrial electrification plans for the furnaces used in steel production. But there are other electrification opportunities for steel operations – material handling equipment.

Applications with high-capacity trucks moving metal products that have cooled to near-ambient temperatures have the greatest potential for electrification and are where metal operations are most likely to consider implementing electric-powered trucks. For example, one steel product manufacturer already uses electric forklifts in indoor storage and distribution facilities, and another is exploring the use of electric trucks to move coils and beams around paved lots. Settings where dust and heat are at reduced levels compared to a mill environment are potential targets for a shift to electric - including applications for ReachStackers in freight and rail yards.

Electric options for high-capacity material handling equipment, including forklifts and ReachStackers, are at various stages of development, from market-ready solutions to promising pilots. Notable examples include:

Lithium-ion forklifts with capacity up to 40,000 pounds



High-performance 350-volt lithium-ion battery power delivers performance comparable to traditional diesel-powered trucks for heavy-duty industries like steel, concrete, lumber, agriculture and ports.

Hydrogen fuel cell-powered ReachStacker pilot




Arrived at the Port of Valencia for testing in late 2023. A hydrogen fuel cell engine converts hydrogen to electricity, offering similar laden container handling performance to diesel-powered equipment and the ability to refuel in as little as 10-15 minutes.

To learn more about fleet electrification, [visit our website](#).



Hyster Company
P.O. Box 7006, Greenville, North Carolina 27835-7006

©2025 Hyster-Yale Materials Handling, Inc., all rights reserved. Hyster and  are trademarks of Hyster-Yale Materials Handling, Inc. Hyster products are subject to change without notice. Trucks may be shown with optional equipment.